



Heat Meter Temperature Sensors



Web: www.bocon-sensor.com
Email: yongchun_zeng@bocondalian.com

COMPANY PROFILE AND CERTIFICATES



Our company adheres to the principle of quality first, aiming to achieve customer satisfaction and provide customers with popular and trusted temperature sensor-related products and services with the goal of continuously enhancing customer satisfaction.

20⁺

Honorary certificate

50⁺

Patented technology

10⁺

All kinds of certificates

Nanjing Bocon Science&Technology Co.,Ltd was established in 2014. It is a wholly-owned subsidiary of Dalian Bocon Technology Co., Ltd. and a high-tech enterprise specializing in the research, production and sales of various sensors.

Bocon has successively obtained the certification of GB/T24001-2016& ISO14001-2015, GB/T45001-2016& ISO45001-2018 and GB/T19001-2016&ISO9001-2015 certification. All products have passed CE certification, MID certification, CCS certification, National Explosion-Proof Certification and The Quality Management System Certification For Weapons and Equipment. Now, our products are widely used in industrial and scientific research fields, including Marine Equipment, Aerospace, Nuclear Power, Semiconductor Industry, Thermal Energy Metering Equipment, Wind power Equipment, Refrigeration Equipment, HVAC, Food Machinery, etc. The main products include Precision Temperature Sensors, Heat Meter Temperature Sensors, RTDS and Thermocouples, Temperature Transmitters, Temperature Controllers, Temperature and Humidity Transmitters, etc. which can meet various complex occasions. The company can provide corresponding solutions based on the specific requirements of different users.

■ Company Certificates



Quality Management System



MID

■ Production Workshop



Temperature Sensor For Heat Meter


TM1401-8-85-1500



- Technical data

Product complies with standards: GB/T32224-2020 and EN1434-2015;
 Environmental Requirements for Use: Building Temperature Measurement;
 Measurement range: 0~105°C/0~150°C;
 Sensing element: Pt500, Pt1000 (Optional), compliant with IEC751 standard;
 Minimum temperature difference: 2K (refrigeration system), 3K (heating system);
 Matching accuracy: $\pm 0.06^{\circ}\text{C}$ (refrigeration system); $\pm 0.1^{\circ}\text{C}$ (heating system);
 Thread connection : G1/2;
 Protective tube: $\phi 6.0 \times 115$, SUS316L;
 Connecting cable: PVC /silicone cable, $\phi 4.2\text{mm}$, 2-wire ;
 Insulation resistance: At room temperature, 100V DC , $R \geq 100\text{M}\Omega$;
 Thermal Response Time: At ambient temperature, Step temperature: 25°C, water flow velocity: 0.8 m/s, $t_{0.5} \leq 3.0\text{s}$;
 Nominal pressure: PN25;
 Protection class: IP68.

- Wiring diagram

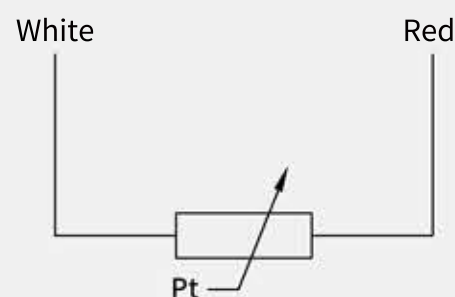

Temperature Sensor For Heat Meter


TM1401/85



- Technical data

Product complies with standards: GB/T32224-2020 and EN1434-2015;
 Environmental Requirements for Use: Building temperature measurement;
 Measurement range: 0~180°C;
 Sensing element: Pt100, Pt500, Pt1000 (Optional), according to IEC 751;
 Matching accuracy: $\pm 0.1^{\circ}\text{C}$;
 Connection method: single two-wire, single three-wire (Pt100);
 Casing: SUS316L, $\phi 8$, thread G1/2, insertion depth 85mm;
 Protective tube: SUS316L, $\phi 6$;
 Insulation resistance: At room temperature, 100V DC , $R \geq 100\text{M}\Omega$;
 Thermal Response Time: At ambient temperature, Step temperature: 25°C, water flow velocity: 0.8 m/s, $t_{0.5} \leq 3.0\text{s}$.
 Nominal pressure: PN25;

- Wiring diagram

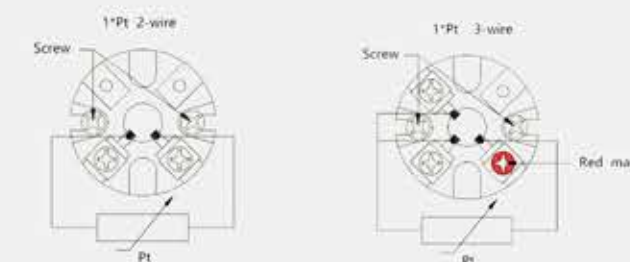

Standard Temperature Sensor For Heat Meter


TM1101-5-1500



• Technical data

Product complies with standards: GB/T32224-2020 and EN1434-2015; MID approved.
 Environmental Requirements for Use: Building Temperature Measurement;
 Measurement range: 0~105°C/0~150°C;
 Sensing element: Pt500, Pt1000 (Optional), compliant with IEC751 standard;
 Minimum temperature difference: 2K (refrigeration system), 3K (heating system);
 Matching accuracy: $\pm 0.06^{\circ}\text{C}$ (refrigeration system); $\pm 0.1^{\circ}\text{C}$ (heating system);
 Thread connection: M10×1;
 Protective tube: $\phi 5 \times 45$, SUS316L;
 Connecting cable: PVC/silicone cable, $\phi 4.2\text{mm}$, 2-wire ;
 Insulation resistance: At room temperature, 100V DC, $R \geq 100\text{M}\Omega$;
 Thermal Response Time: At ambient temperature, Step temperature: 25°C, water flow velocity: 0.8 m/s, $t_{0.5} \leq 3.0\text{s}$.
 Nominal pressure: PN25;
 Protection class: IP68.

• Wiring diagram

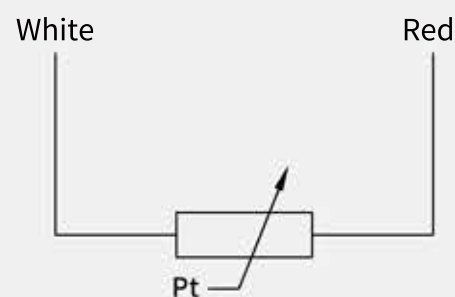

Fast-Response Temperature Sensor For Heat Meter

TM1101/51-5-1500



• Technical data

Product complies with standards: GB/T32224-2020 and EN1434-2015; MID approved.
 Environmental Requirements for Use: Building Temperature Measurement;
 Measurement range: 0~105°C/0~150°C;
 Sensing element: Pt500, Pt1000 (Optional), compliant with IEC751 standard;
 Minimum temperature difference: 2K (refrigeration system), 3K (heating system);
 Matching accuracy: $\pm 0.06^{\circ}\text{C}$ (refrigeration system); $\pm 0.1^{\circ}\text{C}$ (heating system);
 Thread connection: M10×1;
 Stepped protective tube: $\phi 3.7 \times 10 - \phi 5 \times 45$, SUS316L;
 Connecting cable: PVC /PU/Silicone Cable, $\phi 4.2\text{mm}$, 2-wire ;
 Insulation resistance: At room temperature, 100V DC, $R \geq 100\text{M}\Omega$;
 Thermal Response Time: At ambient temperature, Step temperature: 25°C, water flow velocity: 0.8 m/s, $t_{0.5} \leq 2.0\text{s}$.
 Nominal pressure: PN25;
 Protection class : IP68

• Wiring diagram

