Mechanical interface


Mechanical interface of Ned2

Mechanical Overview


Ned2 is a 6-axis collaborative robotic arm. It consists mainly of six robot joints of aluminum with plastic covers. Ned2 consists of 7 parts :




3D view of the robot

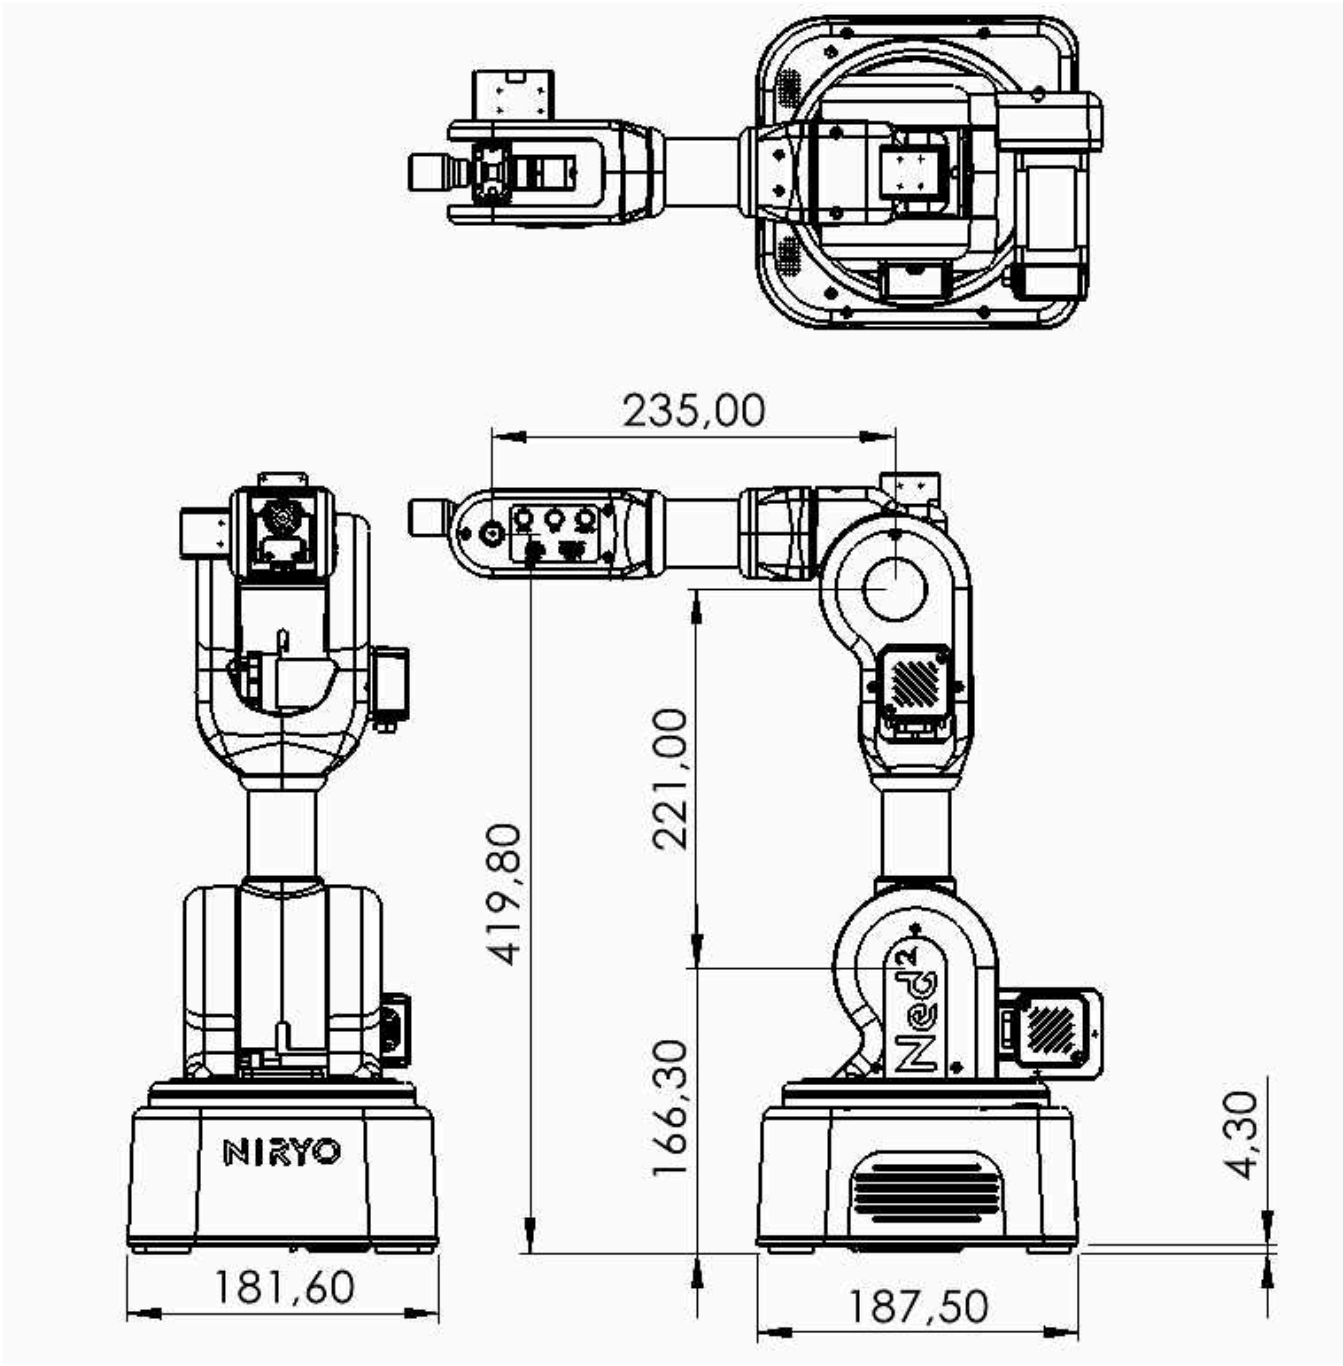


Robot workspace

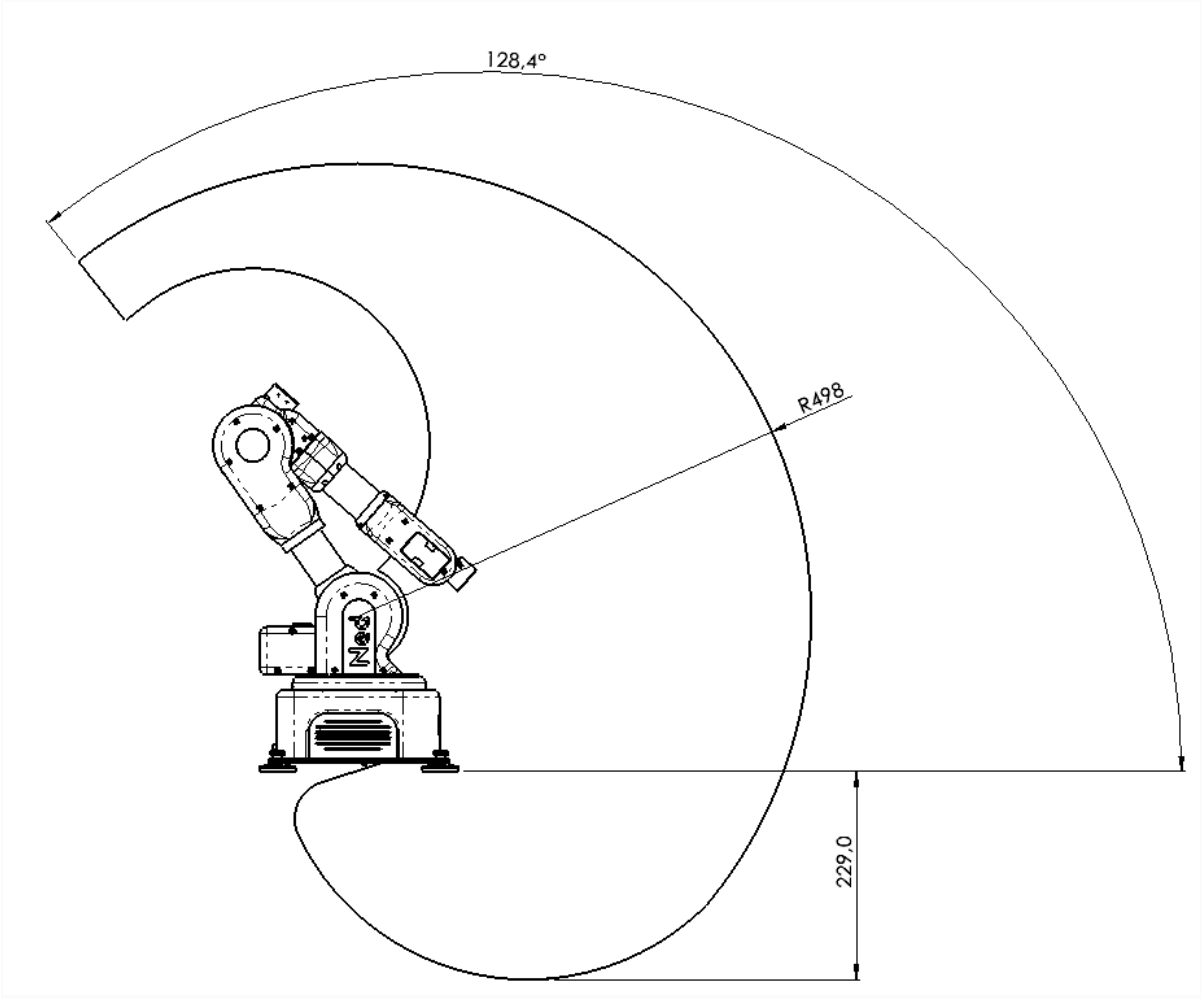
128,4°
R498
229,0

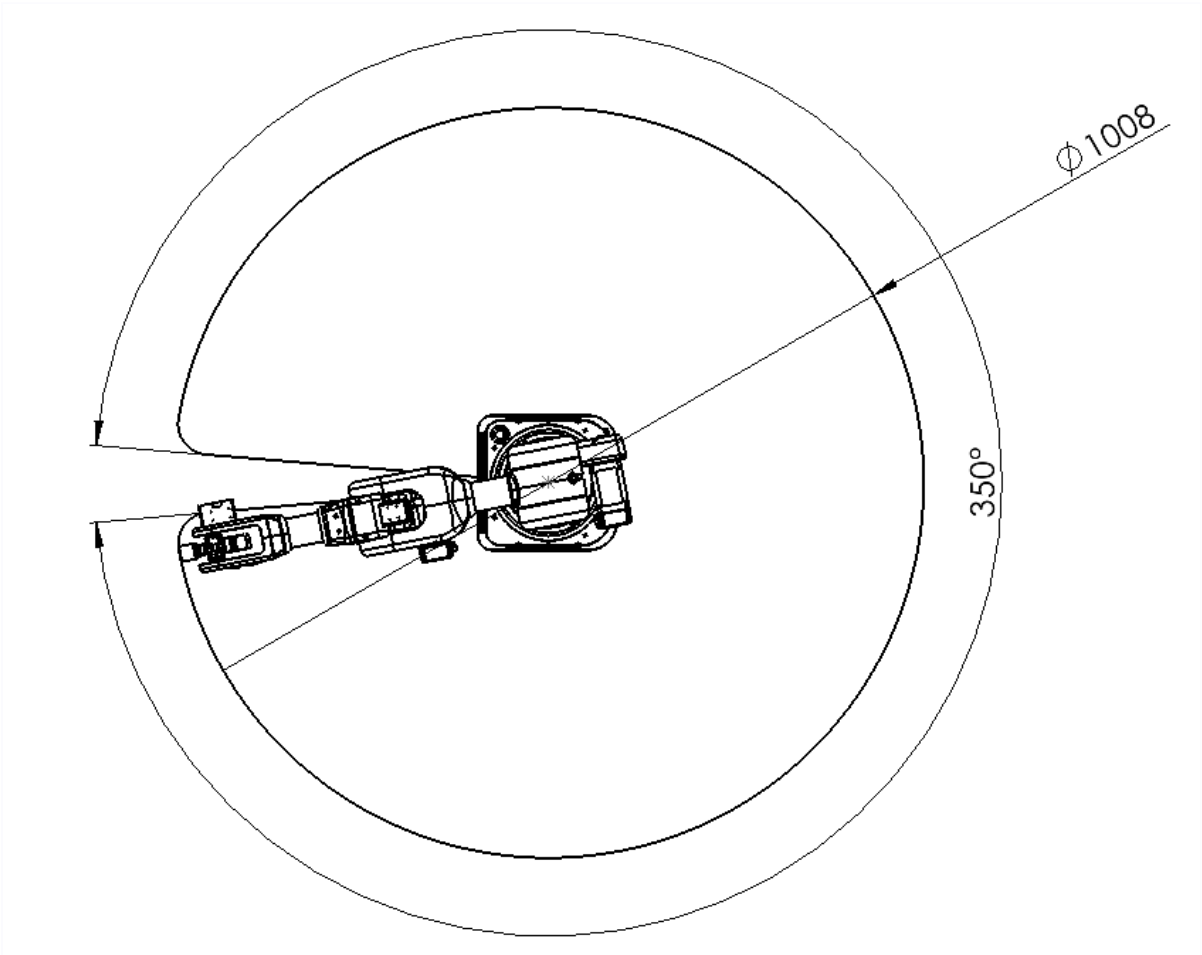
Ø1008
350°

Installation


The robot must be placed on a table or flat surface that is larger than the surface of its support unit.

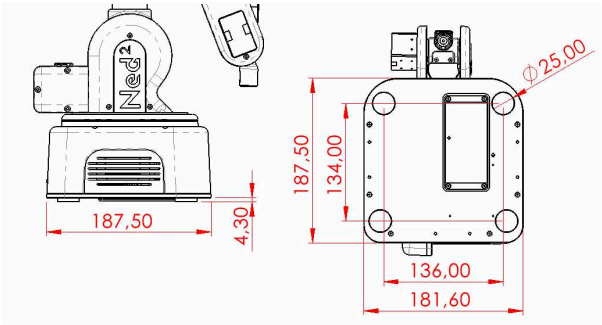

⚠Make sure that the robot is properly installed on a firm surface with enough clearance to avoid shocks and collisions.

Tool mounting

Each tool has the same mechanical connector interface. This option allows a quick-change option of the tool and good stability.

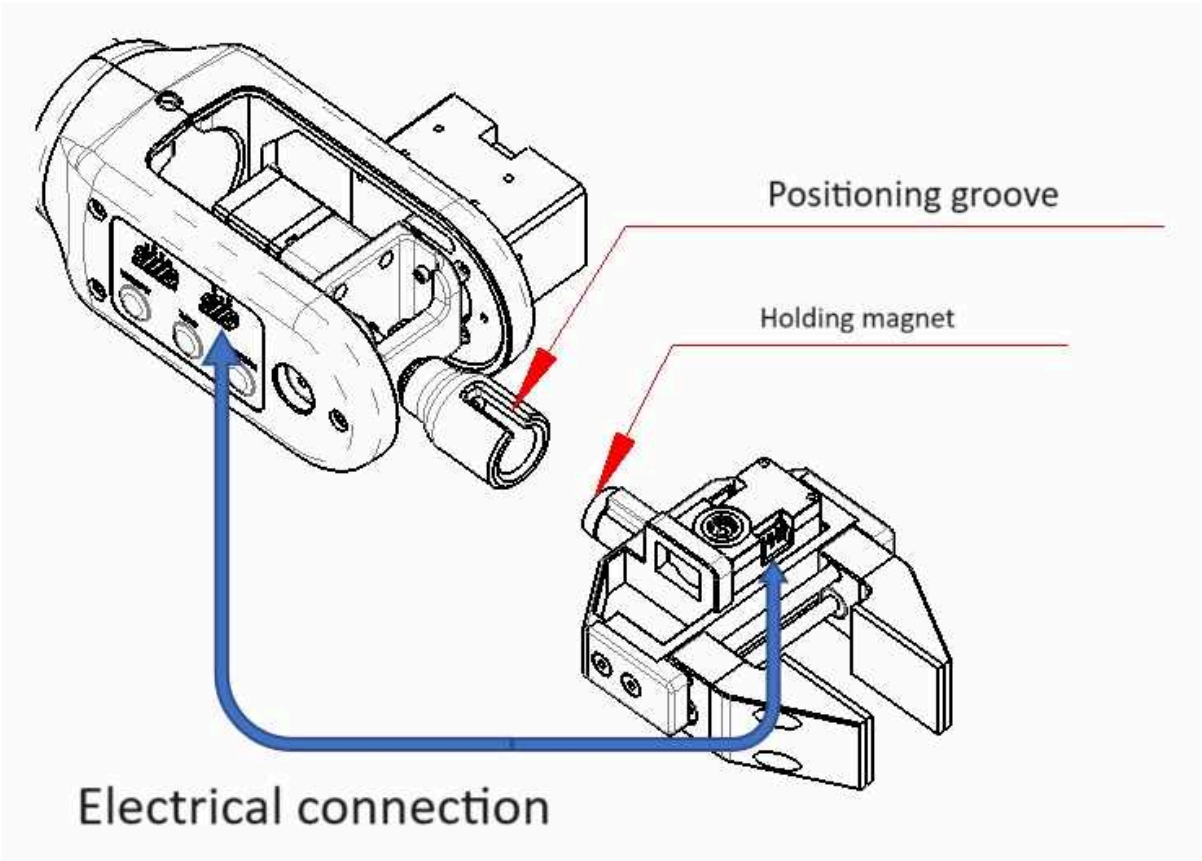

⚠ Be careful not to mount a gripper that is not supplied by Niryo. If you would like to design your own gripping tool, contact our Support Service. Never use loads greater than those stated in the robot specifications as this could cause mechanical failures. Such improper use could also damage the robot.Make sure that the tool is mounted correctly by following the assembly instructions above.

Made with Docsie.io