# Setup


How to setup the vision set

## Hardware


### The Vision wrist



Step 1. Place the screw

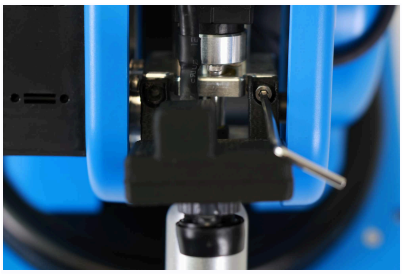

Step2. tighten the first screw with the given tool

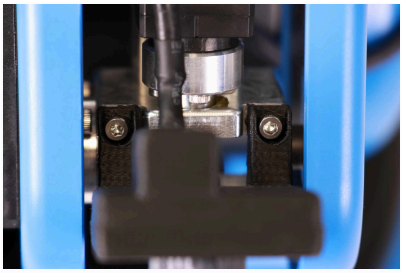

Step3. tighten the second screw




Step4. Pass the cable through the end effector ,between the motor and the aluminum brace

# Software

Please start the robot and connect to it with NiryoStudio.

## Workspace creation

Before using the Vision functions, you need to define the workspace(s) you will use. You can save as many workspaces as you want so if you are using an already saved workspace, you do not have to execute the following process.

In NiryoStudio's menu, open the Equipment tab and click the button to add a new workspace. You will be guided, step by step, to set a workspace.

> Be sure to point the markers correctly in the right order!




As you can use several workspaces in a same sequence, you can save as many workspaces as you need.

> You can click on a marker to move the robot to the pose he had when this point has been registered. **Be sure to have no tool attached to avoid collision**

---

## Camera settings

You can ajust the several camera settings like :

- brightness
- contrast
- saturation

---

Made with Docsie.io