
General USB-C based power supply:
- 5V 2A (minus what is drawn on 3.3V and 9V)
- 12V 1A
- -12V

Note:
- 12V is a linear regulator from Vin
- -5V is a linear regulator from -12V
- 3.3V and 9V are derived from 5V

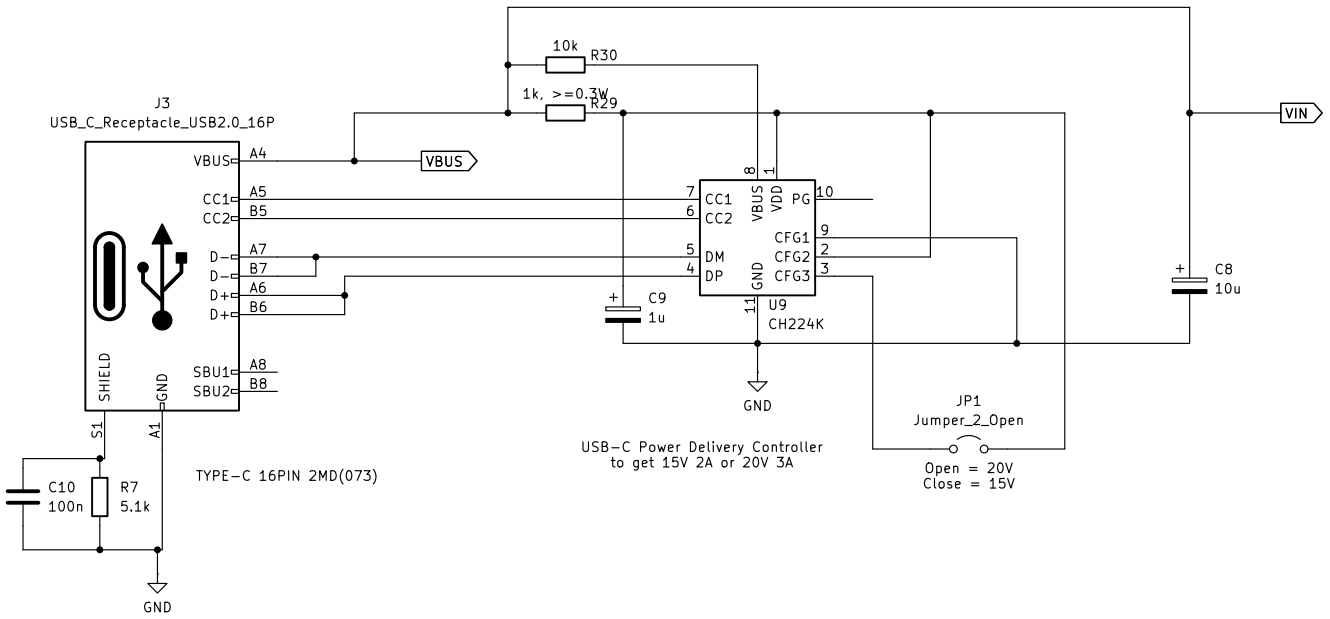

1.4A:
- add 3.3V and 9V

H1 MountingHole
H2 MountingHole
H3 MountingHole
H4 MountingHole


Power Detection and LEDs
File: pwrdetect.kicad_sch


Positive Voltages
File: posvolt.kicad_sch


Negative Voltages
File: negvolt.kicad_sch


USB-C Power Delivery Adapter 1.4A

USB-C-PWR-V1.4A-20260909

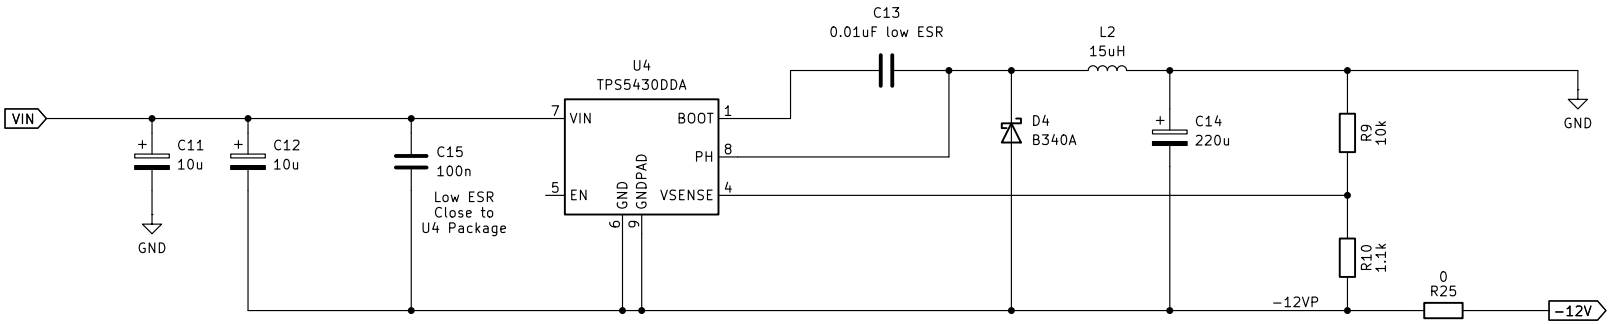

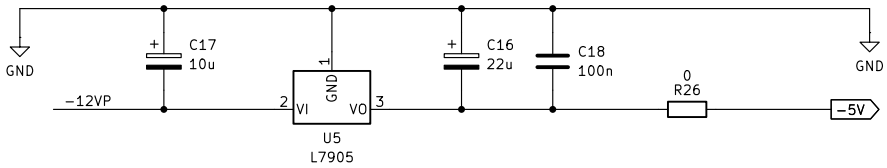




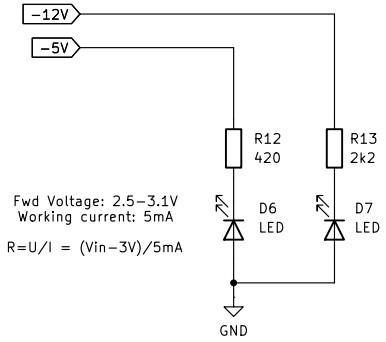



1.4A:
- proper terminal blocks


USB-C Power Delivery Adapter 1.4A


USB-C-PWR-V1.4A-20260909

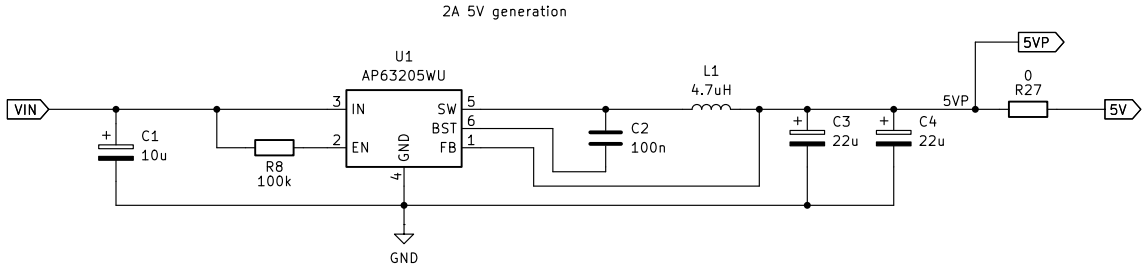


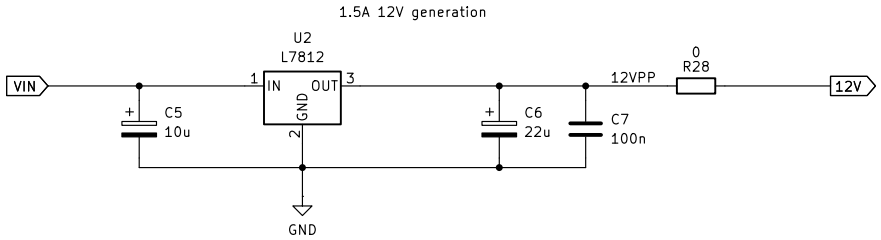


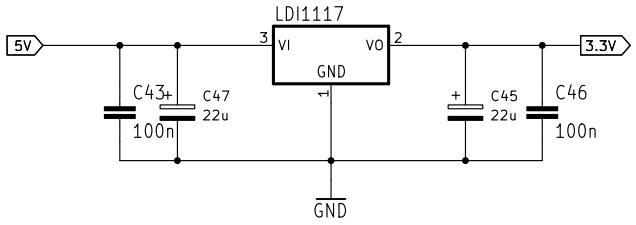

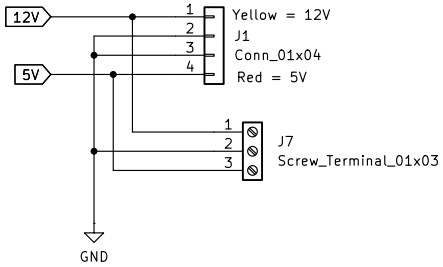

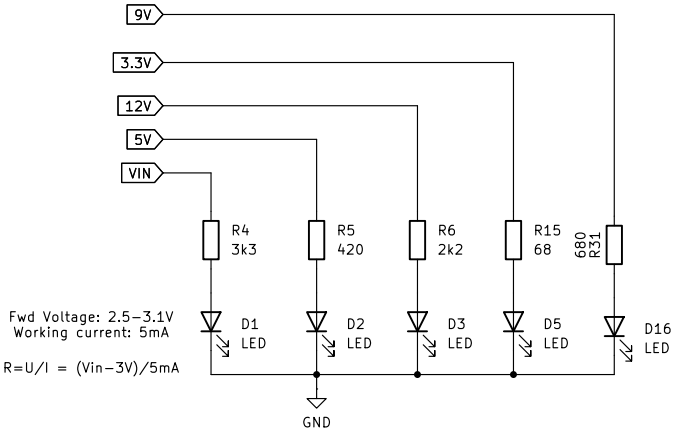

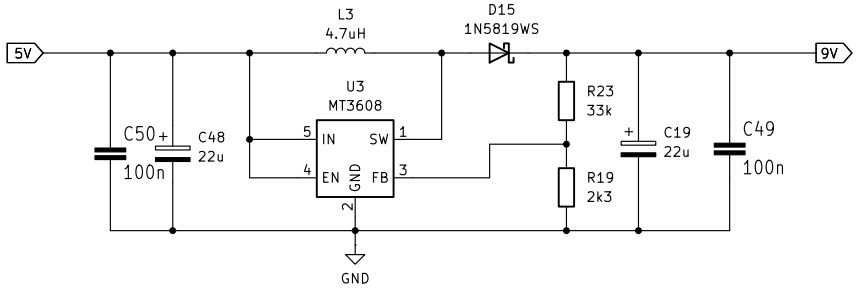






USB–C Power Delivery Adapter 1.4A


USB–C–PWR–V1.4A–20260909


1.4A:
– add 3.3V and 9V
– proper terminal blocks

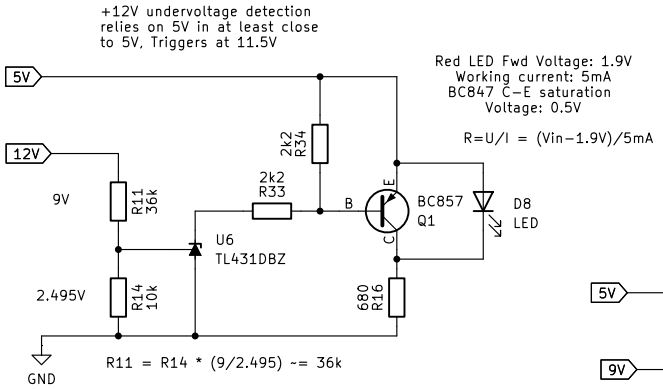

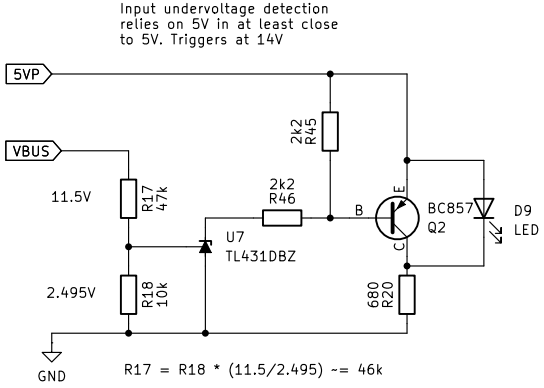

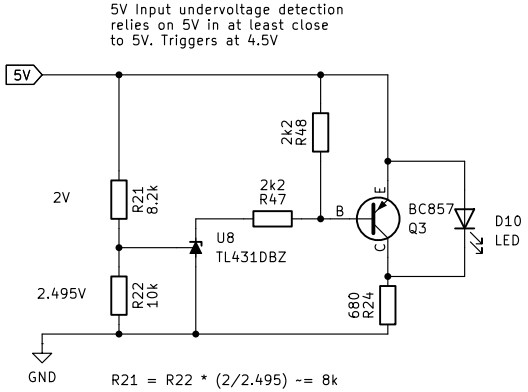


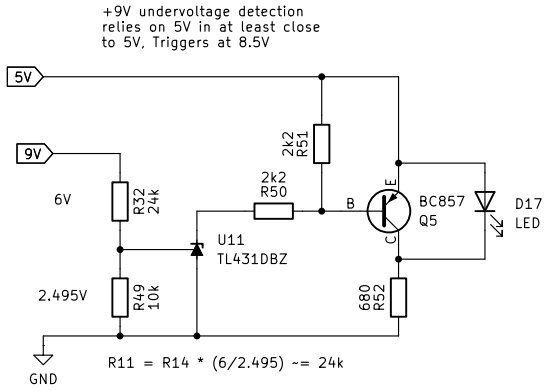


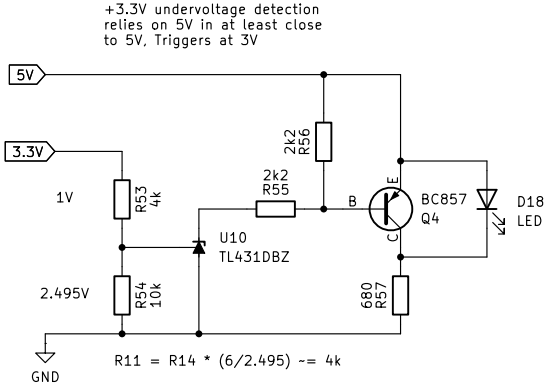

1.3B:
- fix brownout detection for positive voltages

1.4A:
- add 3.3V and 9V

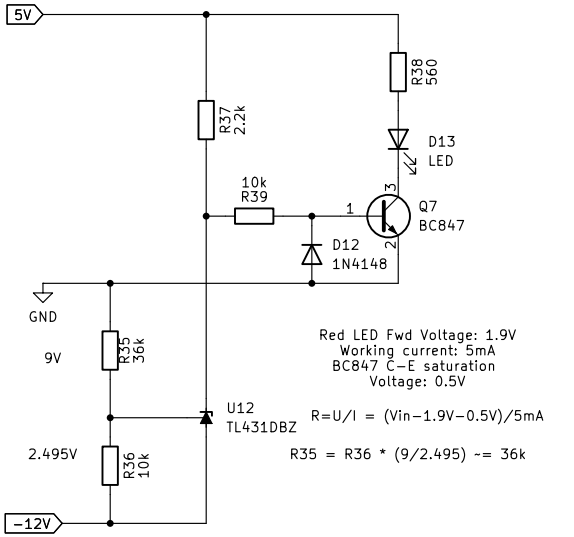

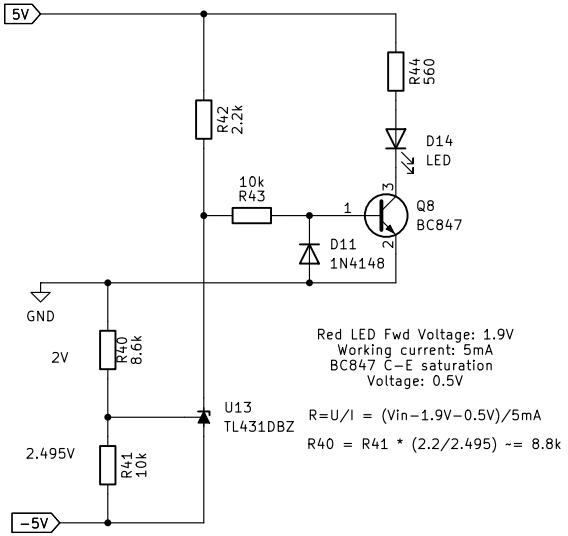

USB-C Power Delivery Adapter 1.4A

USB-C-PWR-V1.4A-20260909