


345-360_w

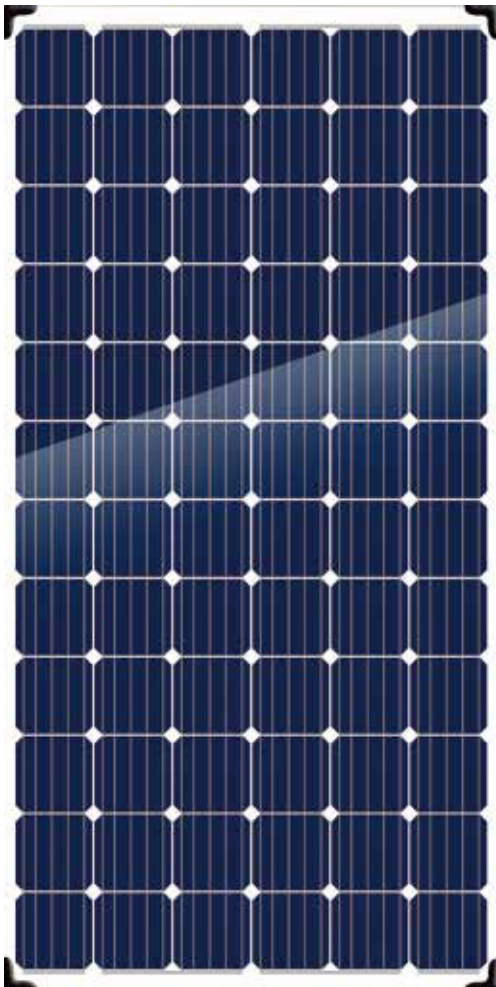

MANAGEMENT SYSTEM

ISO 9001: Quality management system

ISO 14001: Standard for environmental management system

OHSAS 18001: International standard for occupational health and safety assessment system


PRODUCT CERTIFICATES



INSURANCE



WARRANTY

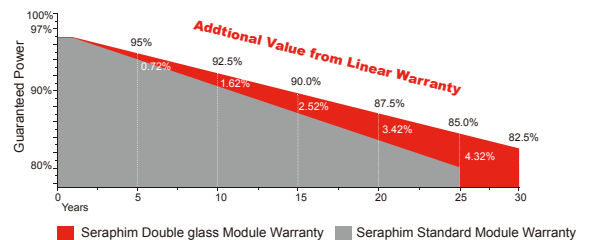

10 YEARS

Guarantee on product material and workmanship

30 YEARS

linear power output warranty



Excellent fire resistance increases safety class.



Frameless structure cuts off the current leakage circuit to avoid PID.



Special encapsulate material, glass as substrate avoids hydrolysis effect, and stable dual-glass structure effectively avoids snail trail.



Solution to withstand harsh environment, glass instead of back sheet as substrate with better resistant to sand, salt mist, ammonia, acid, alkali, etc.



Less maintenance due to frameless structure with less soiling and snow accumulation.




Lower power degradation, more power yield, more returns

SRP-6MA-DG SERIES 6 INCH 72 CELLS

Electrical Characteristics

Module Type	SRP-345-6MA-DG		SRP-350-6MA-DG		SRP-355-6MA-DG		SRP-360-6MA-DG	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power at STC -P _{mp} (W)	345	256	350	260	355	264	360	268
Open Circuit Voltage -V _{oc} (V)	47.30	43.70	47.50	43.90	47.70	44.10	47.90	44.30
Short Circuit Current -I _{sc} (A)	9.24	7.54	9.32	7.61	9.40	7.68	9.48	7.75
Maximum Power Voltage -V _{mp} (V)	38.70	36.30	38.90	36.50	39.10	36.70	39.30	36.90
Maximum Power Current -I _{mp} (A)	8.92	7.06	9.00	7.13	9.08	7.20	9.17	7.27
Module Efficiency STC-η _m (%)	17.60		17.86		18.11		18.37	
Power Tolerance (W)	(0,+4.99)							
Maximum System Voltage (V)	1500 (TÜV)							
Maximum Series Fuse Rating (A)	15							

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5
 NOCT: Irradiance 800 W/m² ambient temperature 20°C wind speed :1m/s;
 Power measurement tolerance: +/-3%

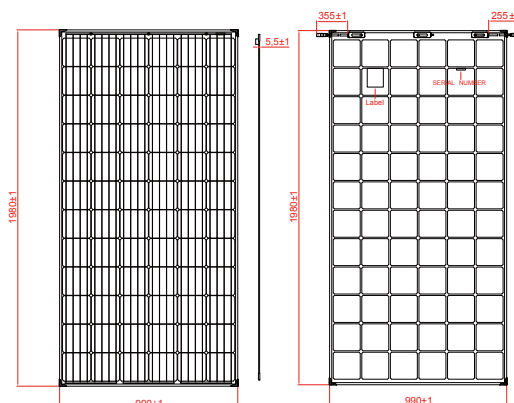

* All Dimensions in mm

* The above drawing is a graphical representation of the product.
 For engineering quality drawings please contact SERAPHIM.

Temperature Characteristics

Pmax Temperature Coefficient	-0.40 %/°C
Voc Temperature Coefficient	-0.32 %/°C
Isc Temperature Coefficient	+0.05 %/°C

Packing Configuration

	1980 x 990 x 5.5mm	
Container	20'GP	40'GP
Pieces per Pallet	34	34
Pallets per Container	10	22
Pieces per Container	340	748

Mechanical Specifications

External Dimensions	1980 x 990 x 5.5mm
Weight	23 kg
Solar Cells	Mono crystalline 156.75 x 156.75 mm (72pcs)
Front Glass	2.0mm AR tempered glass, low iron
Back Glass	2.0mm tempered glass, low iron
Junction Box	IP67
Output Cables	4.0 mm ² , cable length: 255mm(+),355mm(-)or customized
Connector	MC4 Compatible
Mechanical Load	2400 Pa

I-V Curve(SRP-345-6MA-DG)

