YF-OPT-M-80W-D

aurora
OPTOELECTRONIC




Specification :

Model	YF-OPT-M-80W-D
PV Model	80W Mono
Life Time	25 years (The power attenuation of each year is around 1%)
LED Chip Lumen Efficiency	180LM/W
LED Chip	54PCS SMD 5050
Light Distribution Type	Type Ⅱ
Viewing Angle	70°*140°
Color Rendering Index(CRI)	>80
Color Temperature	3000K-6500K, Typical value(5500K-6000K)
Battery Type	LiFePO4 Battery
Battery Capacity	287WH
Battery Life Time	8-10 years
MPPT Charge Controller	Including wireless communication module
Working Mode	Auto dimming, smart control
Circuit Protection	Overcharge, discharge, short ciucuit, open load, lighting protection and other functions
Charging Time(STC)	6-8 Hours (With STC)
Certificate	CE, RoHS, IEC
Working Temperature	-20℃~+60℃(When the temperature is below -10℃, derating use)
Storage Temperature	0℃~45℃
Dimension Size(mm)	1140*445*88
Package Size(mm)	1190*520*220
Net Weight(kg)	14KG
Gross Weight(kg)	30.2KG(2pcs/Ctn)
Installation Height	5-6m light pole
Bracket Inside Diameter	≤80mm
Distance Of Installation	20m to 25m
Warranty	3 years

YF-OPT-M-100W-D

aurora
OPTOELECTRONIC

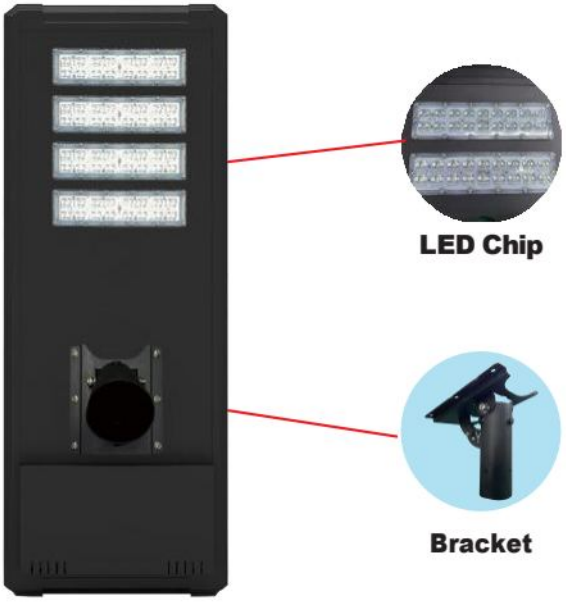

Specification :

Model	YF-OPT-M-100W-D
PV Model	100W Mono
Life Time	25 years (The power attenuation of each year is around 1%)
LED Chip Lumen Efficiency	180LM/W
LED Chip	72PCS SMD 5050
Light Distribution Type	Type Ⅱ
Viewing Angle	70°*140°
Color Rendering Index(CRI)	>80
Color Temperature	3000K-6500K, Typical value(5500K-6000K)
Battery Type	LiFePO4 Battery
Battery Capacity	376WH
Battery Life Time	8-10 years
MPPT Charge Controller	Including wireless communication module
Working Mode	Auto dimming, smart control
Circuit Protection	Overcharge, discharge, short ciucuit, open load, lighting protection and other functions
Charging Time(STC)	6-8 Hours (With STC)
Certificate	CE, RoHS, IEC
Working Temperature	-20℃~+60℃(When the temperature is below -10℃, derating use)
Storage Temperature	0℃~45℃
Dimension Size(mm)	1270*445*88
Package Size(mm)	1320*520*220
Net Weight(kg)	16.4KG
Gross Weight(kg)	35.1KG(2pcs/Ctn)
Installation Height	6-8m light pole
Bracket Inside Diameter	≤80mm
Distance Of Installation	20m to 25m
Warranty	3 years

YF-OPT-M-120W-D

aurora
OPTOELECTRONIC



Specification :

Model	YF-OPT-M-120W-D
PV Model	120W Mono
Life Time	25 years (The power attenuation of each year is around 1%)
LED Chip Lumen Efficiency	180LM/W
LED Chip	90PCS SMD 5050
Light Distribution Type	Type Ⅱ
Viewing Angle	70°*140°
Color Rendering Index(CRI)	>80
Color Temperature	3000K-6500K, Typical value(5500K-6000K)
Battery Type	LiFePO4 Battery
Battery Capacity	496WH
Battery Life Time	8-10 years
MPPT Charge Controller	Including wireless communication module
Working Mode	Auto dimming, smart control
Circuit Protection	Overcharge, discharge, short ciucuit, open load, lighting protection and other functions
Charging Time(STC)	6-8 Hours (With STC)
Certificate	CE, RoHS, IEC
Working Temperature	-20℃~+60℃(When the temperature is below -10℃, derating use)
Storage Temperature	0℃~45℃
Dimension Size(mm)	1550*445*88
Package Size(mm)	1600*490*190
Net Weight(kg)	19KG
Gross Weight(kg)	40.6KG(2pcs/Ctn)
Installation Height	7-10m light pole
Bracket Inside Diameter	≤80mm
Distance Of Installation	20m to 25m
Warranty	3 years