

# LEIND

Lampu Jalan All in One



# LEIND


## PRODUCT SPECIFICATIONS



| Item                            | LI-RON85/85W                                   | LI-RON110/110W | LI-RON128/128W |
|---------------------------------|------------------------------------------------|----------------|----------------|
| Lamp Beads Lumen                | 170(lm/W)                                      | 170(lm/W)      | 170(lm/W)      |
| Solar Panel Power               | 96W                                            | 145W           | 166W           |
| Battery Type                    | lithium cell                                   | lithium cell   | lithium cell   |
| Battery Capacity                | 3. 2V/290WH                                    | 3. 2V/370WH    | 3. 2V/490WH    |
| Lamp Body Dimensions            | 1025*370*133mm                                 | 1118*370*133mm | 1338*370*133mm |
| Unit Net Weight                 | 9.6kgs                                         | 11kgs          | 12.9kgs        |
| Packaga Size                    | 1040*380*155mm                                 | 1140*380*155mm | 1350*380*155mm |
| Charging Time                   | 4-8H                                           | 4-8H           | 4-8H           |
| Discharge Time                  | 24-30H                                         | 24-30H         | 24-30H         |
| Recommended Installation Height | 5-7m                                           | 6-8m           | 7-10m          |
| Beam Angle                      | 75*155°                                        | 75*155°        | 75*155°        |
| Color Rendreing Index           | Ra>80                                          |                |                |
| Material                        | Die-cast aluminum                              |                |                |
| Working Temperature             | -20~+60℃                                       |                |                |
| Controller                      | pwm                                            |                |                |
| Working Mode                    | light control and intelligent control          |                |                |
| IP Ratings                      | IP66                                           |                |                |
| Light Source                    | Epistar: SMD2835                               |                |                |
| Application                     | Street, garden, courtyard, road, outdoors, etc |                |                |

# LEIND

## EXPLODED VIEW

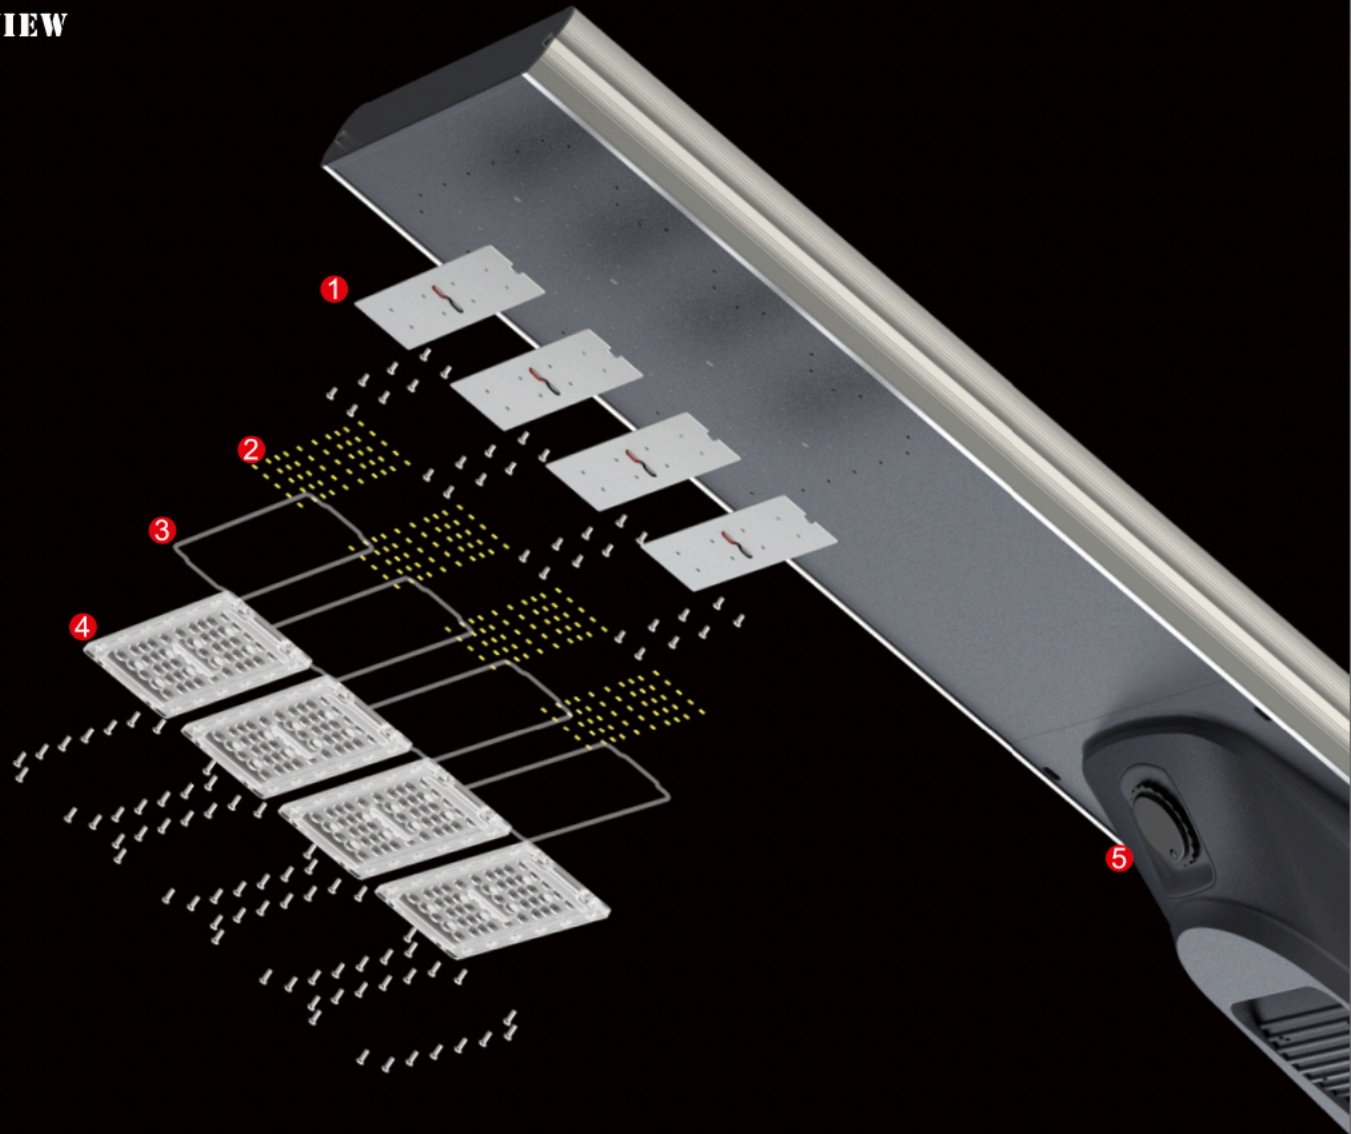

① High Efficiency Aluminum PCB

⑤ Light Switch

② High Lumen 2835 SMD Light Source

⑥ Die-casting Aluminum Body

③ Waterproof Silicone Rubber

⑦ Battery Case

④ UV-proof Optical Lens




# LEIND

## BATTERY REPLACEMENT

A removable battery design, which user can easy to pull off the old battery and system of solar lights, and quickly to plug-in new one.

Advantage: It can greatly save labor cost, transportation cost and crane cost in future maintenance.

### Removable and replaceable battery

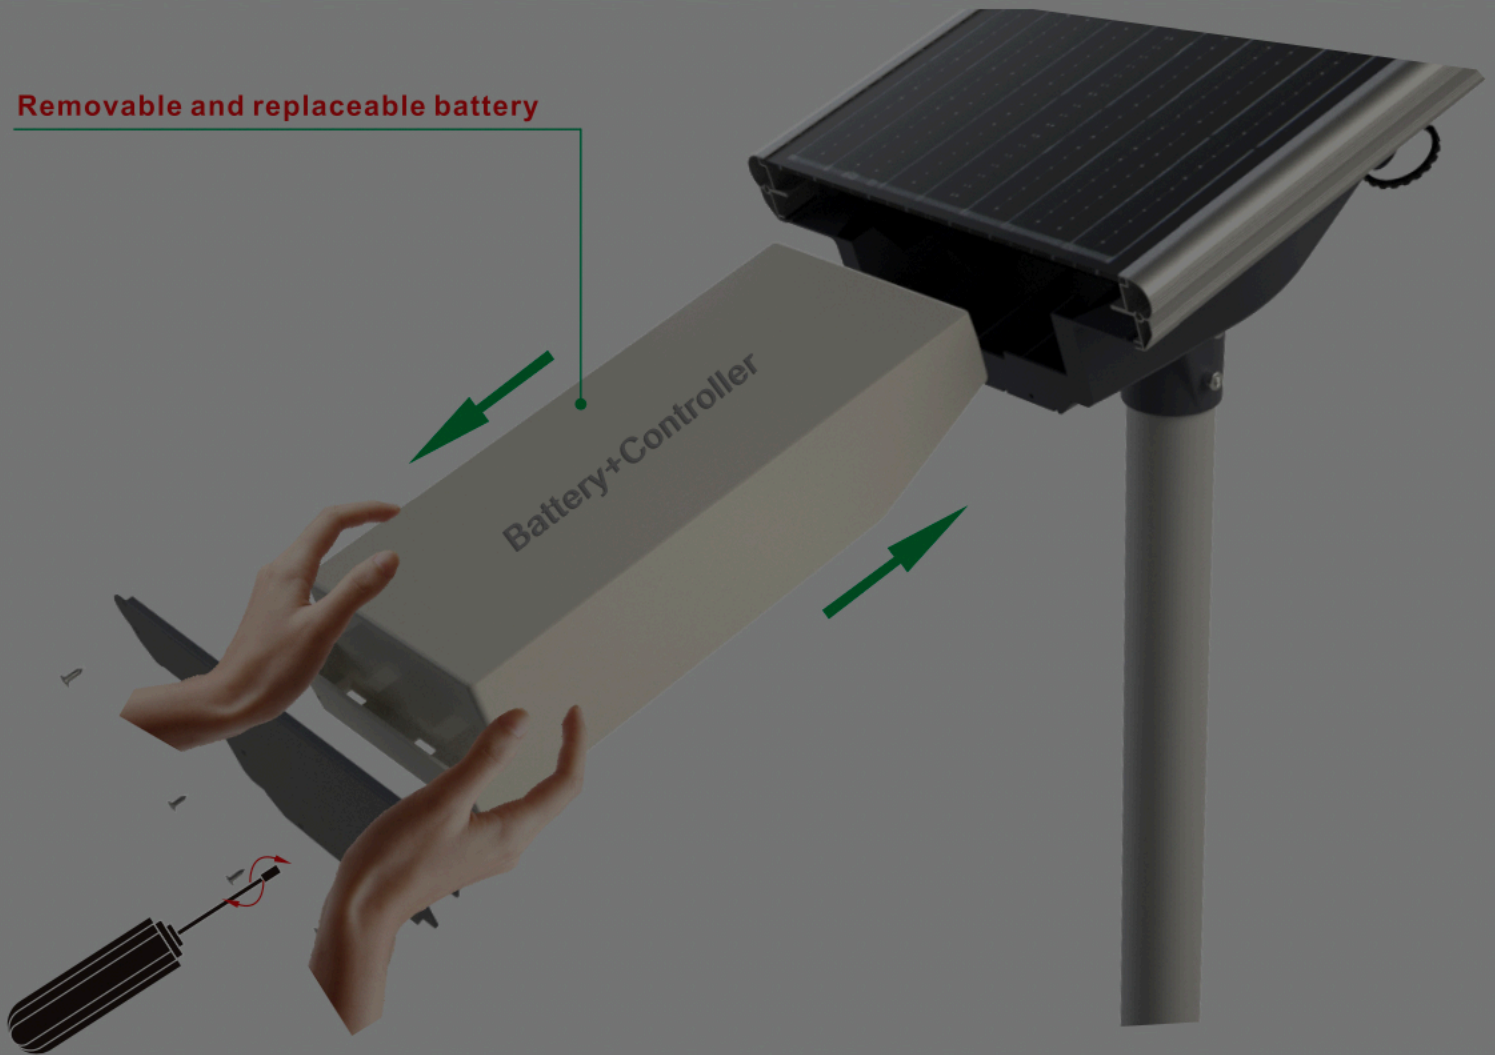

---

## FEATURES

1. High efficient solar charging.
2. Super brightness led chips and long working life.
3. The system and battery of the lamp can be quickly replaced to facilitate subsequent lamp maintenance.
4. Easy installation
5. Solar street lights have multiple functional lighting modes, which can meet the needs of multiple users.