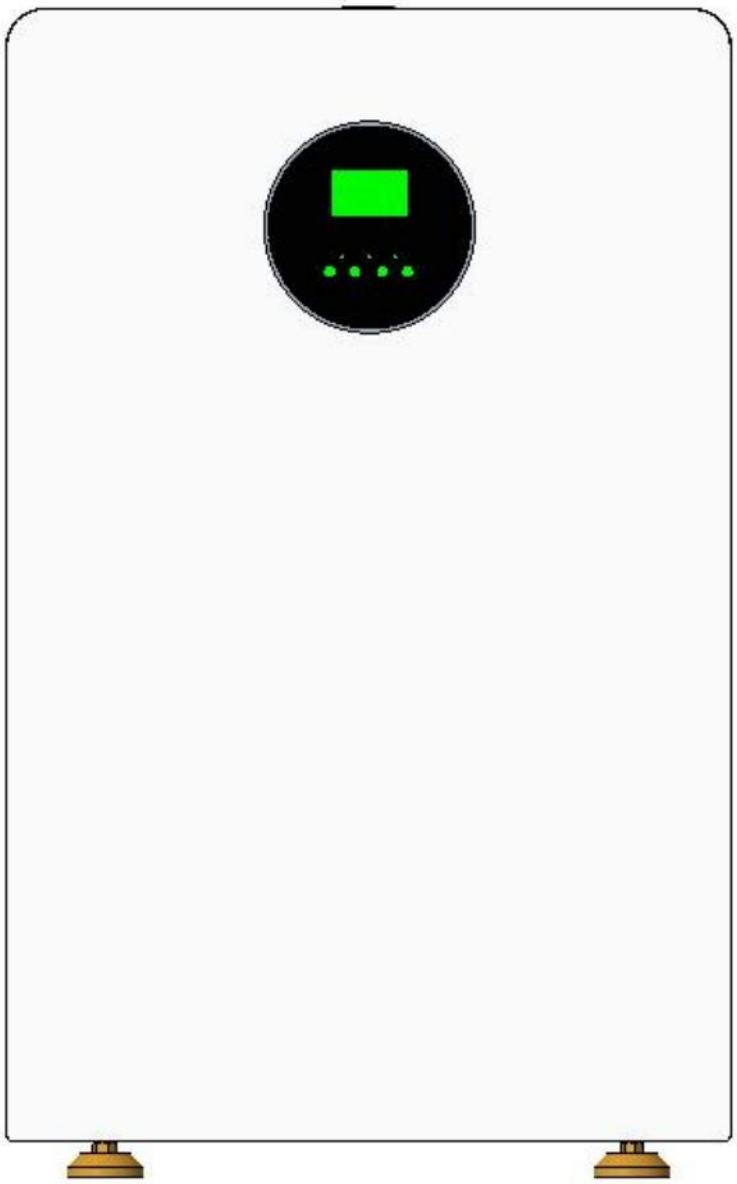


UBETTER TECHNOLOGY Co.,Ltd

5KW+5kWh inverter all-in-one machine

specification

Energi.Click by Rekasurya · energi.click · WhatsApp 0811-2241-107

1. scope

This specification applies to the 51.2V 100Ah 16S1P LiFePO4 rechargeable battery pack manufactured by UBETTER TECHNOLOGY COMPANY LIMITED.

2. main specifications

2.1 Battery cell specification TED

	No.	project	General parameters	remarks
Cell	1	nominal capacity	102Ah	
	2	nominal voltage	3.2V	Average operating voltage
	3	Internal impedance	≤ 1.5 mΩ	AC 1 KHz test (50% SOC)
	4	size	(50.1±0.5) *(160±0.8) *(118.5±0.5)	Initial size
	5	weight	1.985±0.1Kg	make an appointment
	6	Charging cut-off voltage	3.65 V	Cell temperature T> 0℃ Cell temperature T> 0℃
	7	Cut-off voltage of discharge	2.5 V	Battery temperature T> 0℃ Cell temperature T > 0℃
			2.0 V	Battery temperature T ≤ 0℃ Cell temperature T≤0℃
	8	Charging multiplier	Standard multiplier: 0.2P	25 ℃
	9	Discharge rate	Standard multiplier: 0.2P 64W	25 ℃
			Maximum continuous discharge rate: 1P 320W	25 ℃
	10	storage temperature	Temperature: 0℃~35℃, humidity less than or equal to 85%	
	11	Cycle performance	25℃ 0.5C/0.5C 5000 times 35℃ 0.5C/0.5C 3500 times 45℃ 0.5C/0.5C 2000 times	Capacity retention rate is greater than or equal to 80%

Energi.Click by Rekasurya · energi.click · WhatsApp 0811-2241-107

2.2 Battery pack specifications

	No.	project	General parameters	remarks
battery pack	1	combinatorial method	16S1P	
	2	rated capacity	100Ah	Standard discharge followed by standard charge (packaging)
	3	working voltage	51.2V	Average operating voltage
	4	The voltage at the end of discharge	40V	Cut-off voltage of discharge
	5	charging voltage	58.4V	Charging cut-off voltage
	6	Internal impedance	≤50mΩ	The internal resistance measured at 1KHZ of AC must be measured after 50% charge using a new battery that has been shipped within one week and has less than 5 cycles.
	7	Standard charging	Constant current 40A Constant voltage See No.5 0.02CA cut off	Charging time: about 5 hours
	8	Maximum continuous charging current	100A	
	9	Standard discharge	Constant current: 20A The termination voltage is shown in No.4	
	10	Maximum continuous discharge current	100A	
	11	operating temperature range	Charging temperature range: 0~55℃ Discharge: -20~65℃	60±25% relative humidity.
	12	Storage temperature range	Less than 12 months: -10~35℃ Less than 3 months: -10~35℃ Less than 7 days: -20~45℃	60±25% relative humidity, in transport condition.
	13	size	750*480*151mm	
	14	weight	Approx: 57kg	

Energi.Click by Rekasurya · energi.click · WhatsApp 0811-2241-107