


5kWh battery for vertical/wall -mounted use

PRODUCTFEATURE

- It can be used in parallel with multiple units, with quick plugging and unplugging, and is easy to expand
- Natural cooling can reduce the power consumption of the entire model
- Class A battery cells are selected, with a service life of up to 10 years
- The modular design makes installation and maintenance easy
- The chemical composition of lithium iron phosphate eliminates the risk of explosion or combustion caused by high impact, overcharging or short circuit
- The high-definition display screen design is more convenient to use
- The unique wall-mounted design is easy to move and takes up little space. The vertical design can be stably placed on the ground or in a corner, without occupying too much floor space.
- Large capacity, high cycle life, safe and stable

Solar System Connection

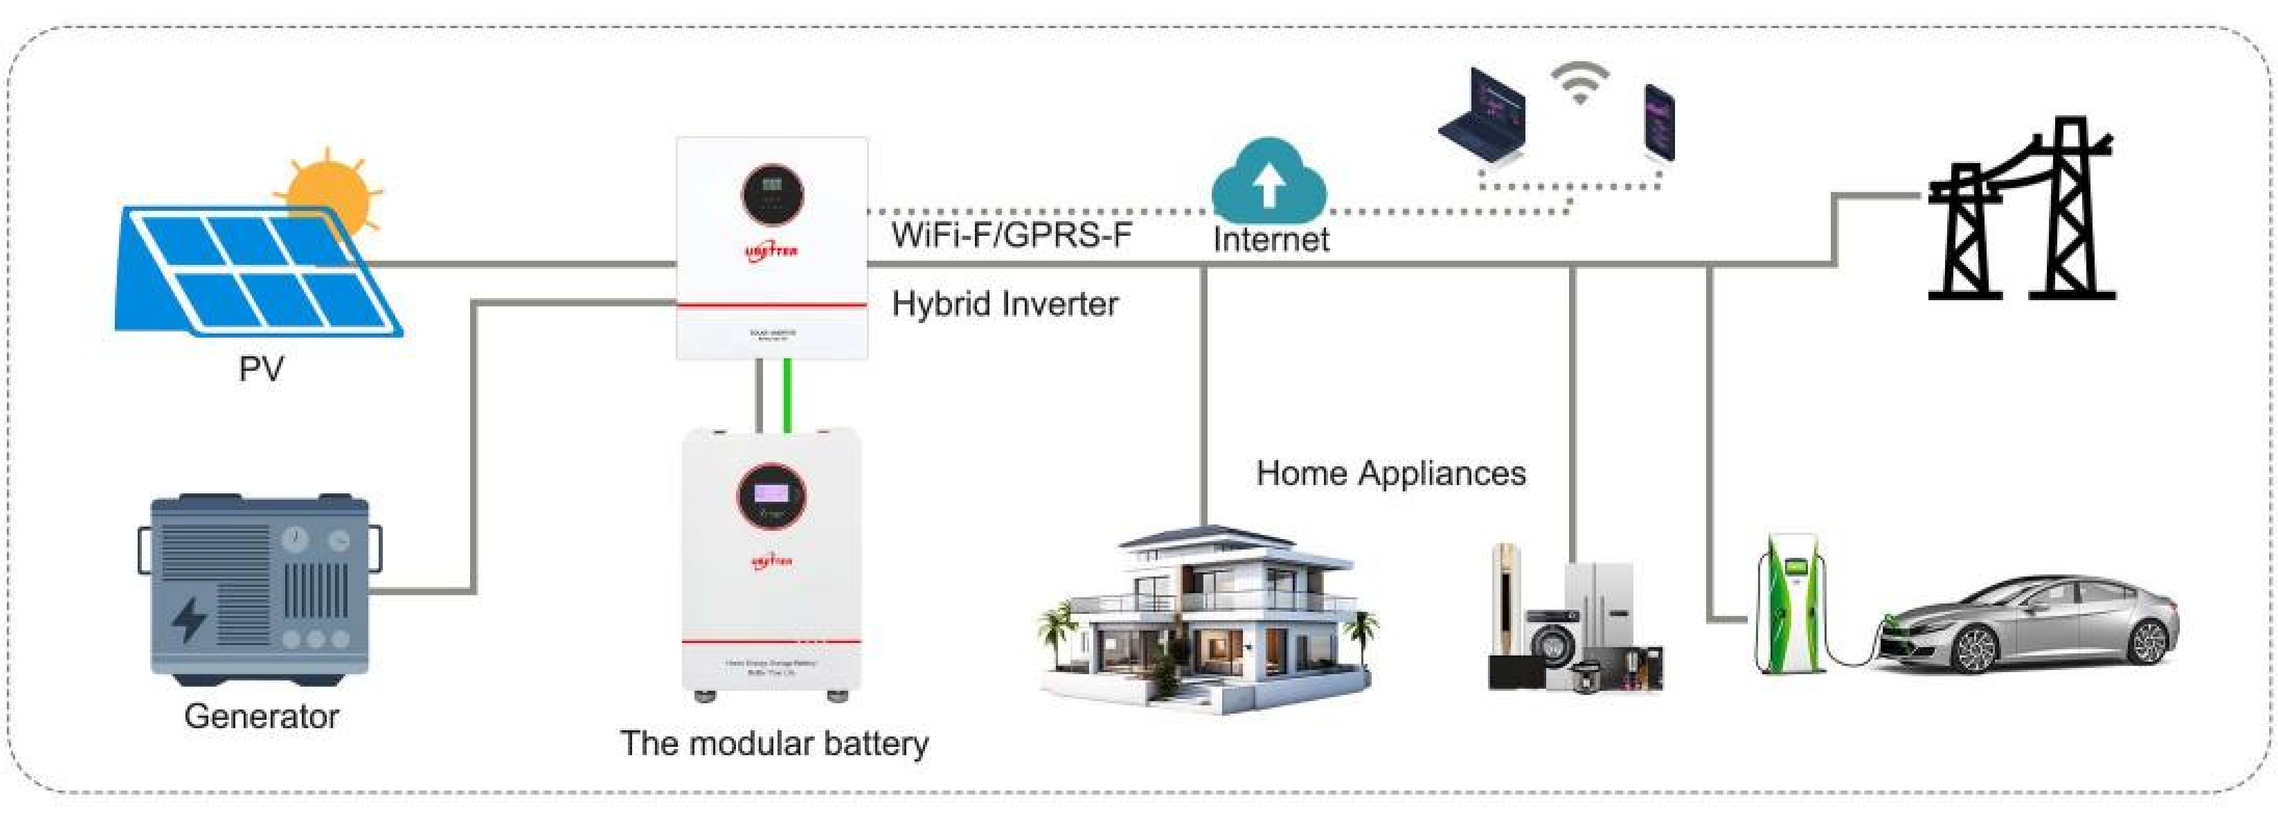

Item	Specifications		Remark
Product specifications			
Nominal voltage	25.6V	51.2V	
Nominal Capacity	200Ah	100Ah	Standard discharge followed by standard charging (packaging)
Energy	5120Wh	5120Wh	
Working voltage	25.6V	51.2V	Average operating voltage
Charge Voltage	29.2V	58.4V	Charging cut-off voltage
Standard charging	Constant current:40A	Constant current:40A	Charging time: Approximately 5 hours
Maximum charging current	100A/200A	100A	Operating current based on BMS
Discharge cut-off voltage	20V	40V	
Standard discharge	Constant current: 40A	Constant current: 40A	
Maximum discharge current	100A/200A	100A	Operating current based on BMS
Battery model	25.6V 200Ah 8S2P	51.2V 100Ah 16S1P	
Shell material	Cold-rolled steel plate	Cold-rolled steel plate	
Size	600*380*145mm	600*380*145mm	
Weight	45kg	45kg	
Operating temperature range	Charging:0~55°C	Charging:0~55°C	60±25% Relative humidity
	Discharge: -20~65°C	Discharge: -20~65°C	

UBETTER 5kWh battery for vertical/wall -mounted use

Distributor resmi di Indonesia: Energi.Click by Rekasurya

energi.click · WhatsApp 0811-2241-107