


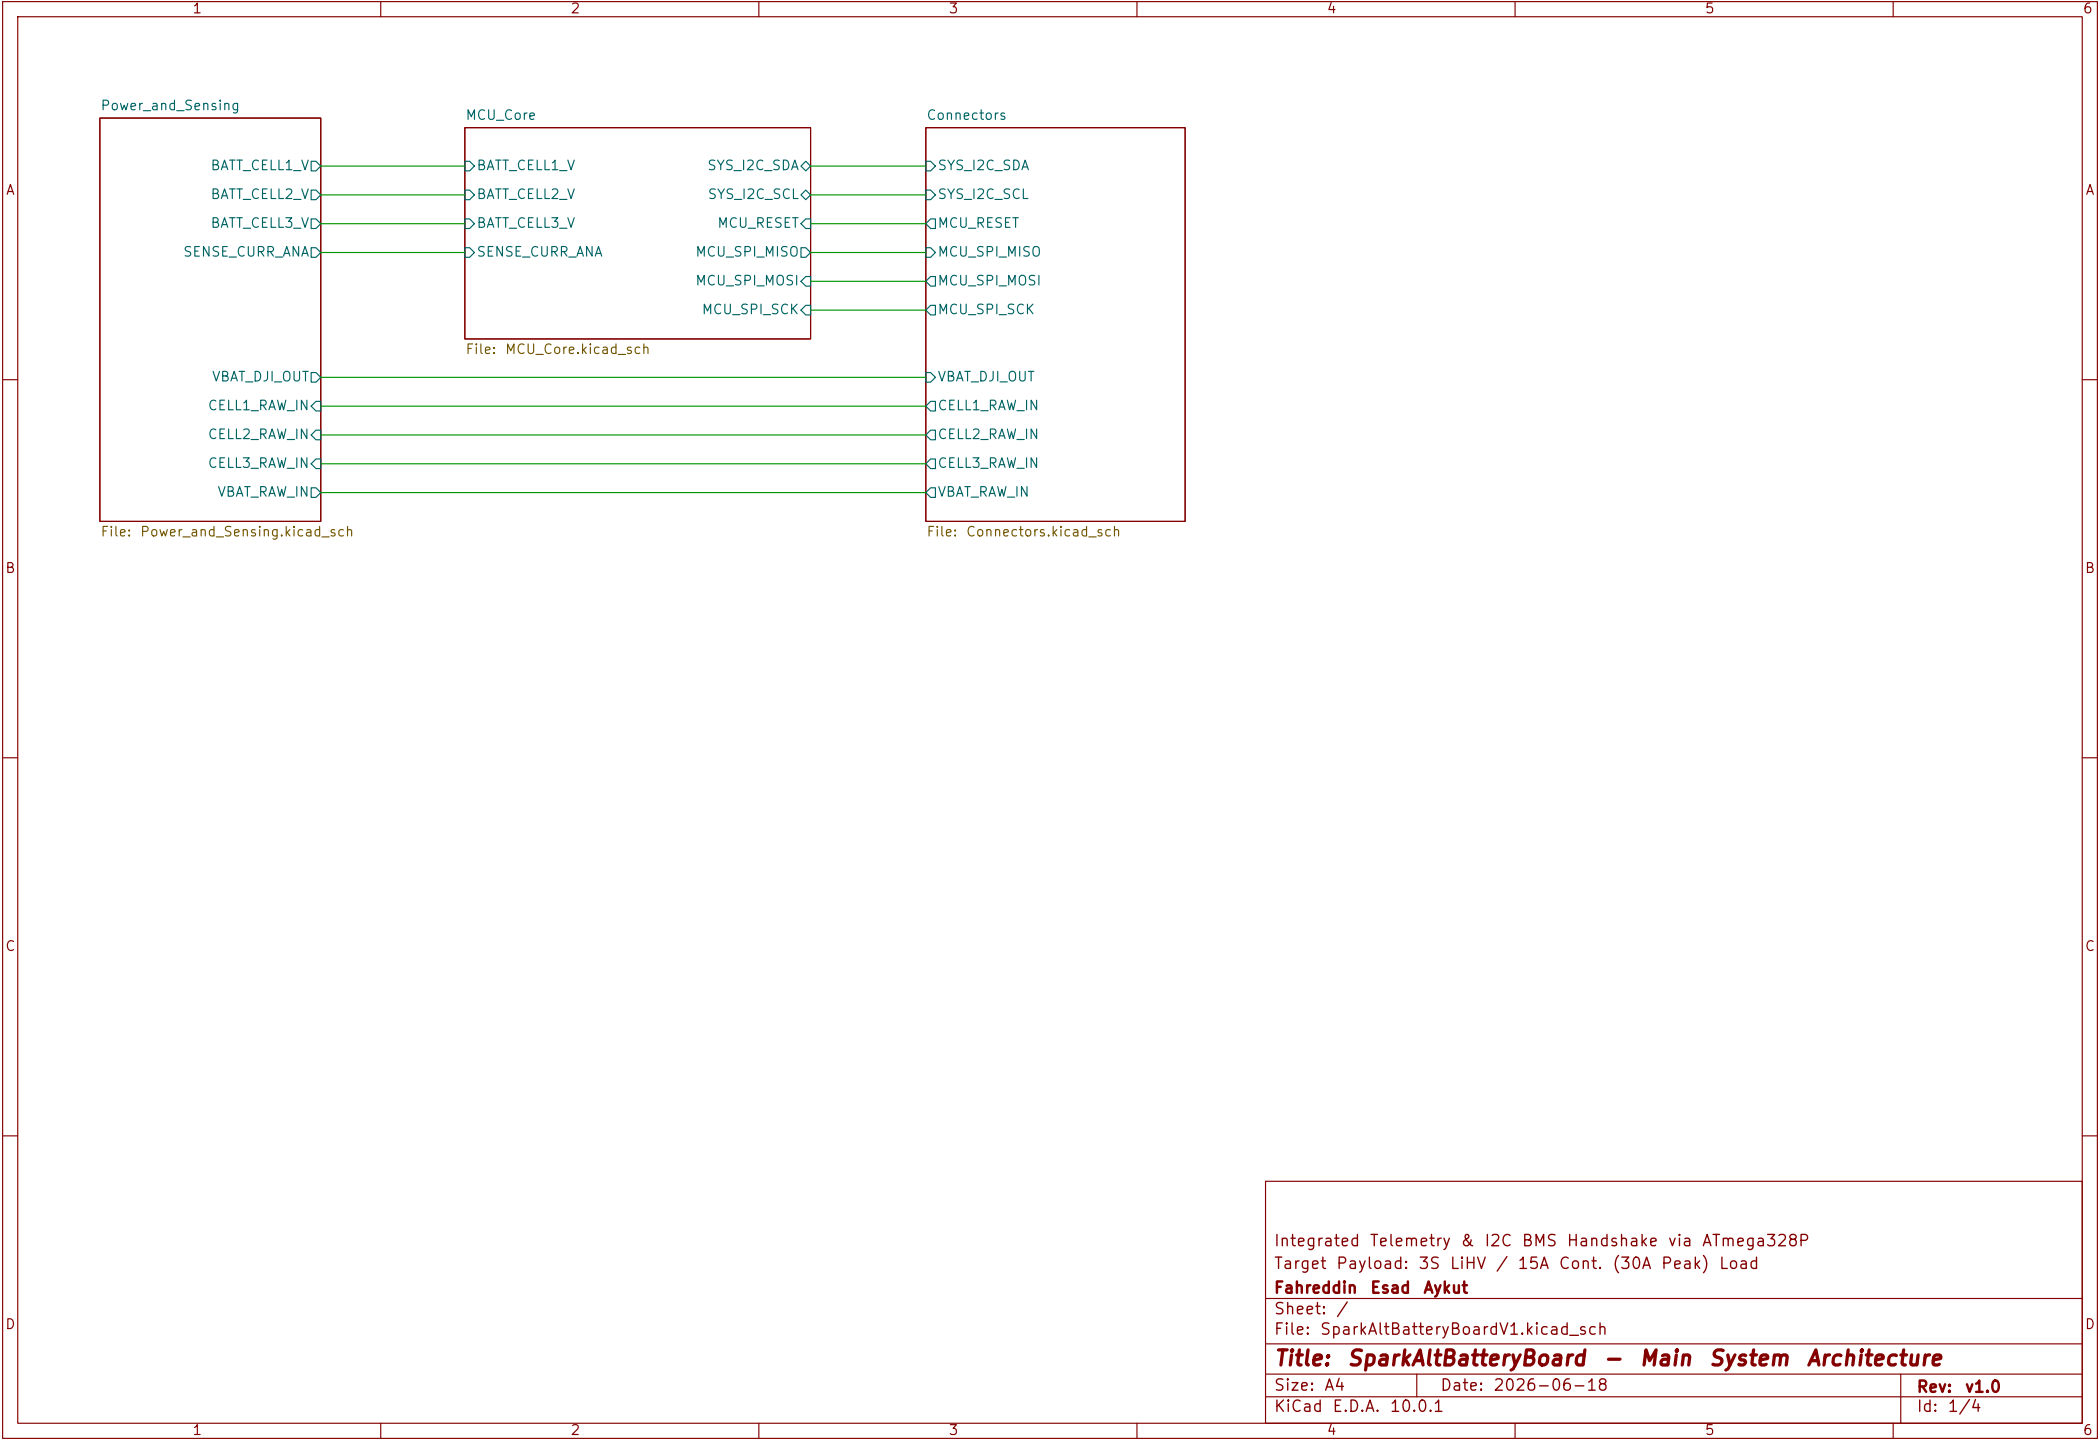
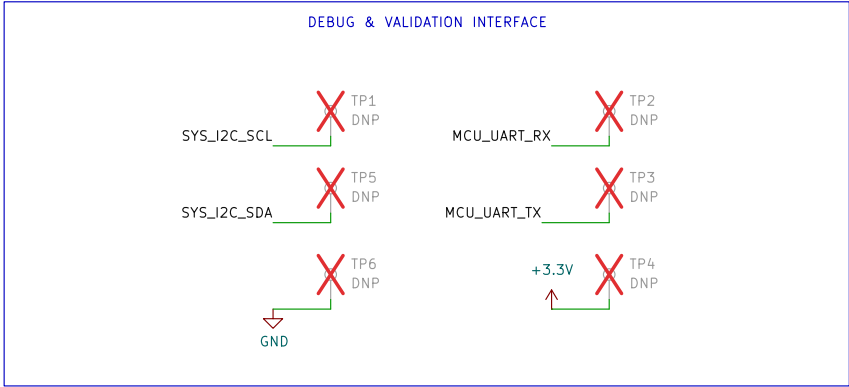




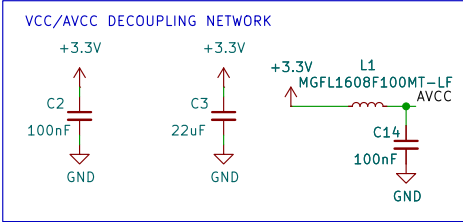

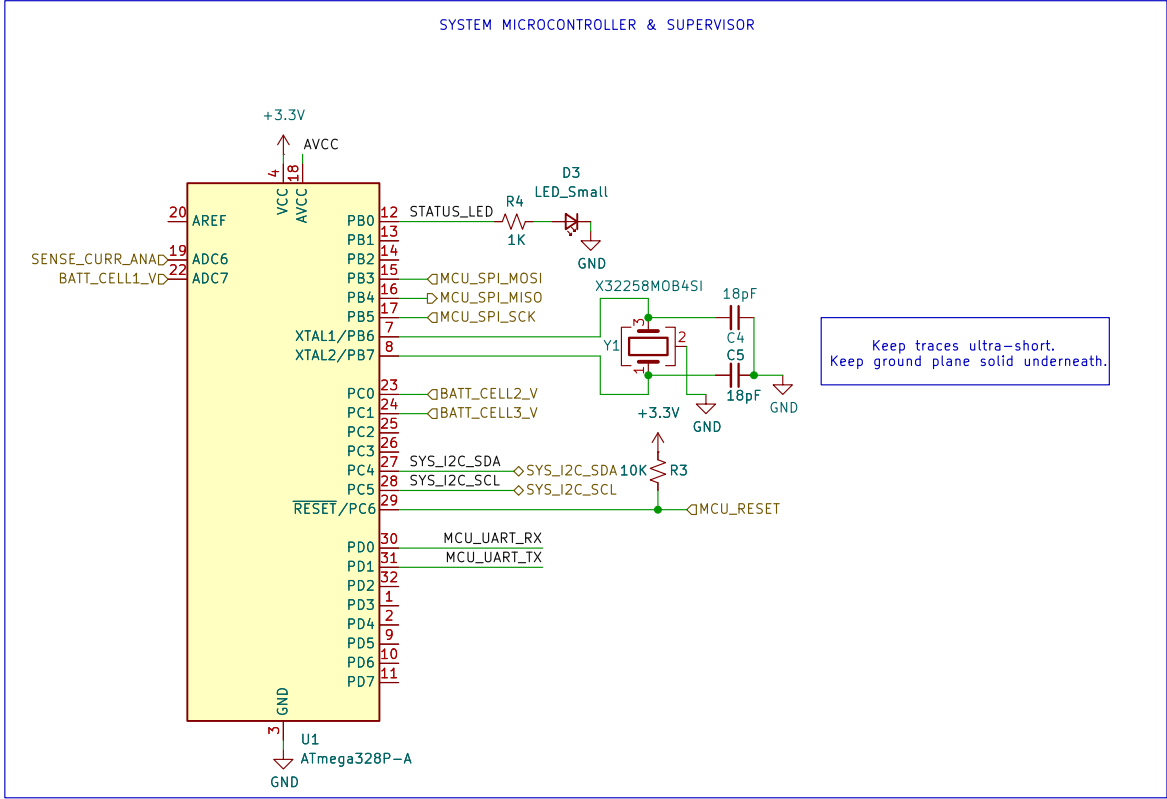

ATmega328P @ 8MHz / Target Logic Level: 3.3V





Sheet: /MCU\_Core/  
File: MCU\_Core.kicad\_sch

**Title: System MCU & Telemetry Processor**

Size: A4  
KiCad E.D.A. 10.0.1

Date:

Rev:  
Id: 3/4

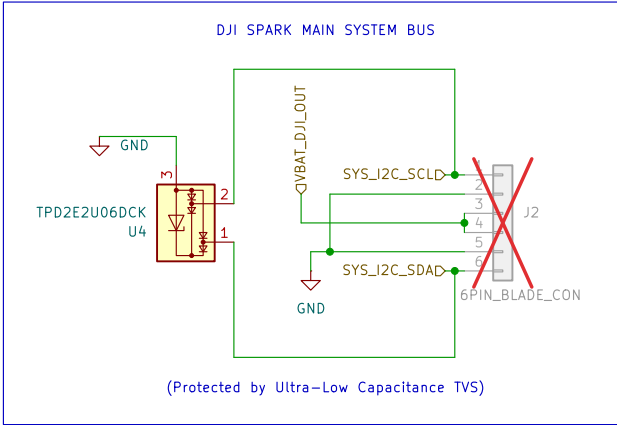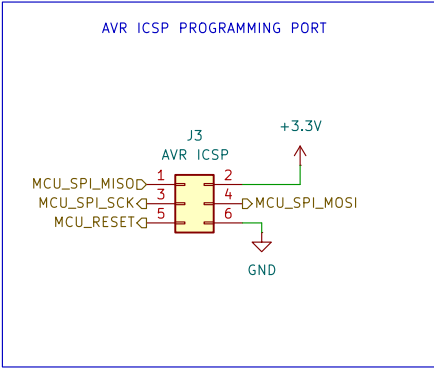

SYSTEM INTERFACE & RATING SPECIFICATIONS:

- [BATT\_MAIN]: XT30 Input (VBAT\_RAW\_IN)
  - Continuous Current Rating: 15A (30A Peak).
  - Routing: Traces to DJI output must be routed as power polygons on both Top and Bottom layers. Remove soldermask for heavy tin plating.
- [BATT\_CELLS]: JST-XH-4P Balance Input
  - Max rating per cell pin: 4.35V (LHV standard).
  - Total series max voltage: 13.05V.
- [ICSP\_HEADER]: AVR Programming (2x3 Pin 2.54mm)
  - TARGET VOLTAGE (VTG): 3.3V.
- DO NOT USE 5V PROGRAMMERS WITHOUT LOGIC LEVEL SHIFTERS. Direct 5V exposure on ICSP lines will irreversibly damage the 3.3V onboard LDO/Buck and INA199 current sense amplifier.

DJI Handshake Bus, AVR ICSP & High-Current Raw Input

Sheet: /Connectors/  
File: Connectors.kicad\_sch

**Title: External Interfaces & Power Bus Routing**

Size: A4

Date:

KiCad E.D.A. 10.0.1

Rev:

Id: 4/4