

DIGGY ONLINE SHOP

Peralatan ukur suhu, sparepart industri

Jl. Cikutra Barat No. 65 Bandung 40123 Tlp. 085221261303, 081220818079

Email : diggysshop@gmail.com

Nomor : 005/DGSH/PHB-IV/05042021

Bandung, 05 April 2021

Hal : Penawaran harga barang.

Lampiran : 1 lembar

Kepada : Yth. PT. Audemars Indonesia
di tempat.

Kami Diggy Online Shop yang bergerak di bidang penjualan barang khusus peralatan ukur, sparepart alat industri bermaksud untuk memberikan penawaran barang untuk keperluan industri. Adapun daftar barang adalah sebagai berikut :

NO	Nama Barang	Jml	Harga (Rp.)	Harga Total (Rp.)	Keterangan
1	Germany Heraeus PT1000 PT1000 thin film platinum resistor chips class 2B	100	45.000	4.500.000	Jika stok kurang/tidak tersedia maka harus indent 2-4 minggu dengan ketentuan DP 30%.
Total				4.500.000	

Demikian penawaran dari kami, apabila ada informasi yang perlu diketahui mengenai penawaran ini lebih lanjut maka Bapak/Ibu dapat menghubungi kami. Atas perhatian dan kerjasamanya diucapkan terima kasih.

Hormat kami,

Nining Tresnaningsih, S.Pd., MM.

Lampiran :

Tersedia PT100 dan PT1000 Class 2B silahkan pilih.

M-series PRTDs are designed for large volume applications where long term stability, interchangeability and accuracy over a large temperature range are vital. Typical applications are Automotive, White goods, HVAC, Energy management, Medical and Industrial equipment.

The measuring point for the nominal resistance is defined at 8mm from the end of the sensor body.

1. Temperature range: 70°C to $+500^{\circ}\text{C}$ (continuous operation)(temporary use to 550°C possible)

Tolerance Class B/2B: -70°C to $+500^{\circ}\text{C}$

Tolerance Class A: -50°C to $+300^{\circ}\text{C}$

Tolerance Class C: 0°C to $+150^{\circ}\text{C}$

2. Temperature coefficient: $\text{TC} = 3850 \text{ ppm/K}$

3. Leads: Pt clad Ni- wire

Recommended connection technology:

Welding, Crimping and Brazing

4. Lead lengths (L): A/B/C: $10\text{mm} \pm 1\text{mm}$ 2B: $5\text{mm} \pm 0.5\text{mm}$

5. Long-term stability: Max. R0 drift 0.04% after 1000h at 500°C

6. Vibration resistance: At least 40g acceleration at 10 to 2000 Hz, depends on installation

7. Shock resistance: At least 100g acceleration with 8ms half sine wave, depends on installation

8 Environmental conditions: Unhoused for dry environments only

9. Insulation resistance: $> 100 \text{ M}\Omega$ at 20°C ; $> 2 \text{ M}\Omega$ at 500°C

10. Self heating: 0.6 K/mW at 0°C

11. Response time:

Water current ($v = 0.4\text{m/s}$): $t_{0.5} = 0.04\text{s}$ $t_{0.9} = 0.12\text{s}$

Air stream ($v = 2\text{m/s}$): $t_{0.5} = 2.2\text{s}$ $t_{0.9} = 7.0\text{s}$



12. Measuring current:

100Ω : 0.3 to 1.0 mA

1000Ω : 0.1 to 0.3 mA (self heating has to be considered)

The measuring point for the nominal resistance is defined at 8mm from the end of the sensor body.

Diggyshop

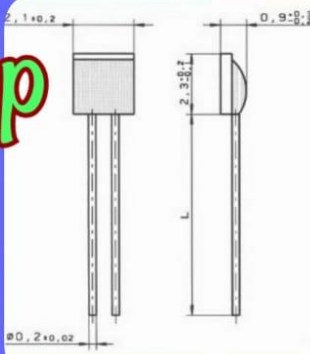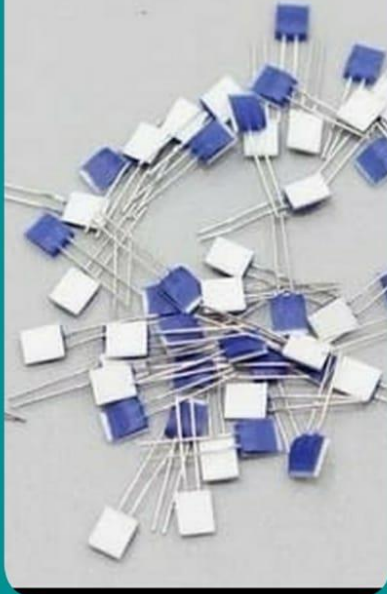

nominal istance R0	Tolerance DIN EN 60751 1996-07	Tolera DIN EN 6 2009-
0hm at 0°C	Class C	F 0.7
	Class A	F 0.1
	Class B	F 0.3
	Class 2B	F 0.5
0 Ohm at 0°C	Class C	F 0.7
	Class A	F 0.1
	Class B	F 0.3
	Class 2B	F 0.5

