

KEWPUMP®

Keeps Pumping



KS-SG²

CHEMICAL PROCESS PUMP

COMPLIES WITH ISO 2858

& 5199 STANDARDS



Fully Compliance with International Standards

Dimensions and Performances - ISO 2858:1975

Design and Construction - ISO 5199:2002

Flanges Dimensions - ISO 7005-1:1992 - PN16


Mechanical Seals - DIN 24960

Baseplates Dimensions - ISO 3661:1977


Materials of Construction

All standard pump components in contact with the fluid are made of Stainless Steel 316 (CF-8M).


Other materials are also available upon request.

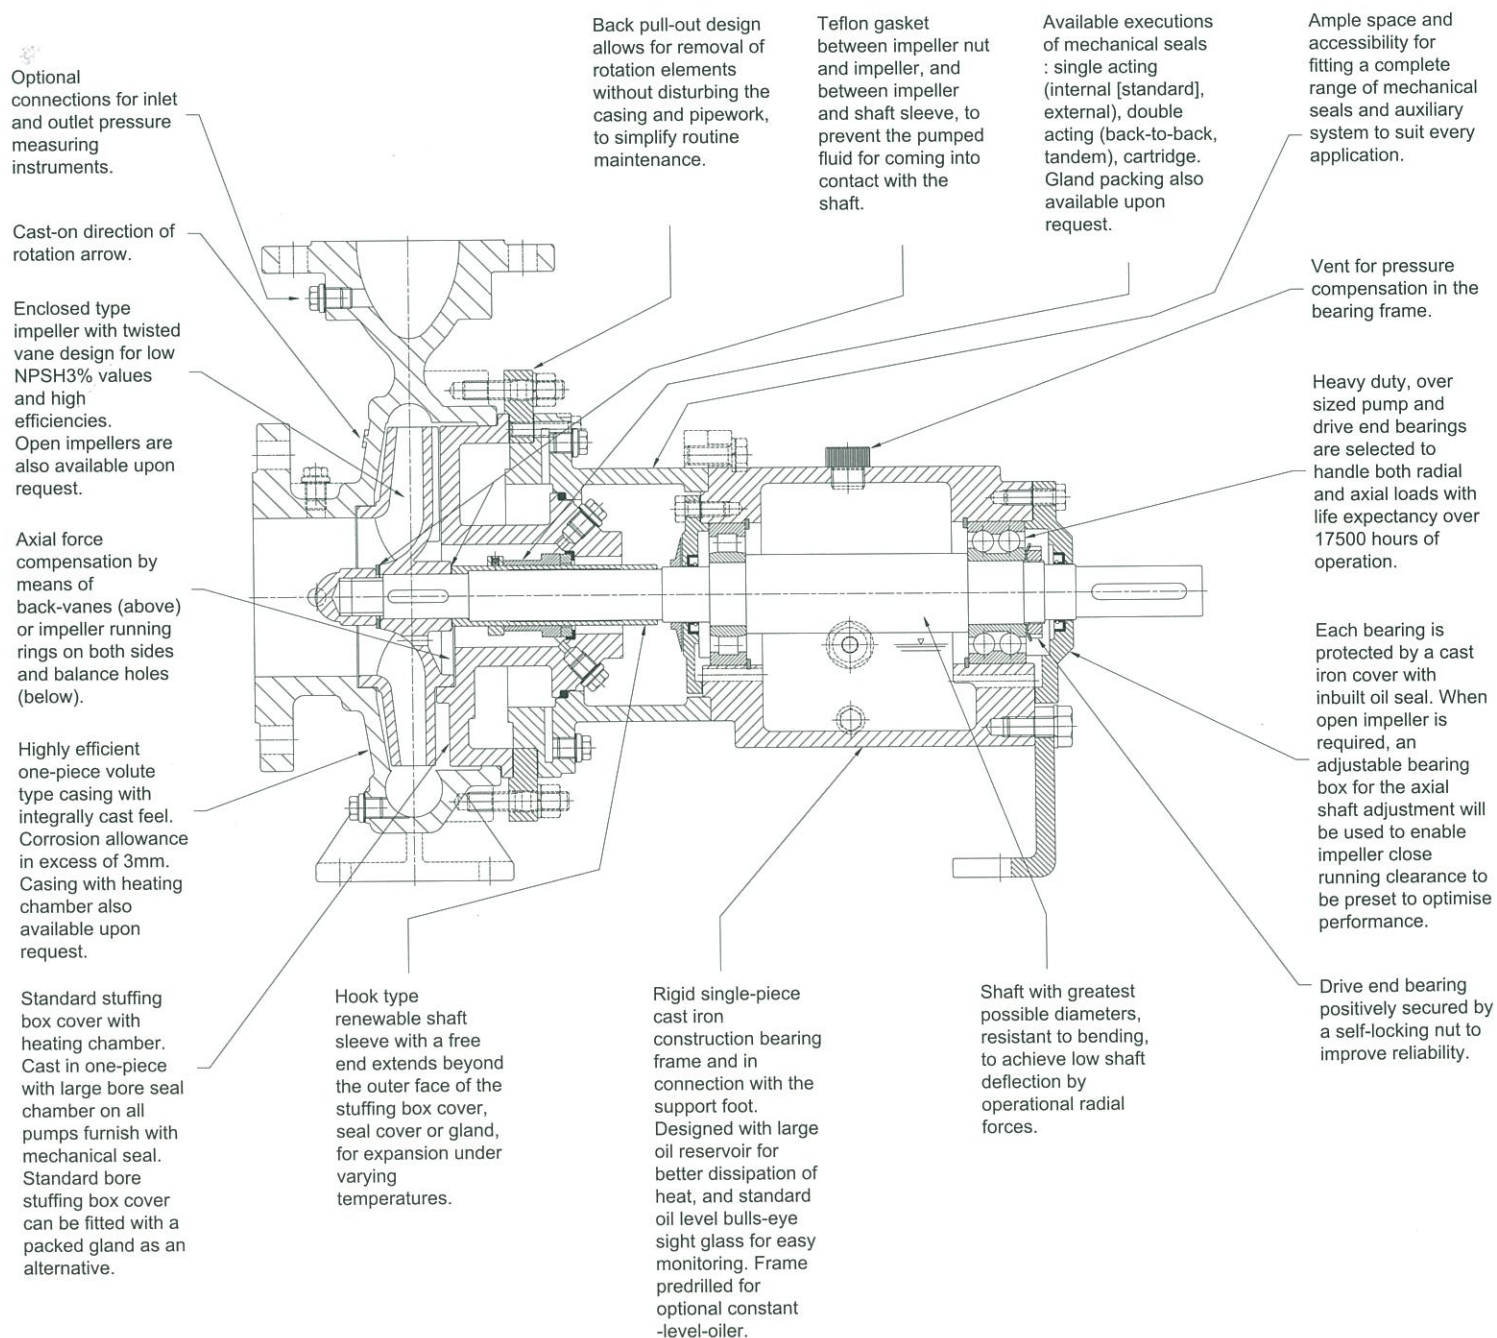

MODEL DESIGNATION

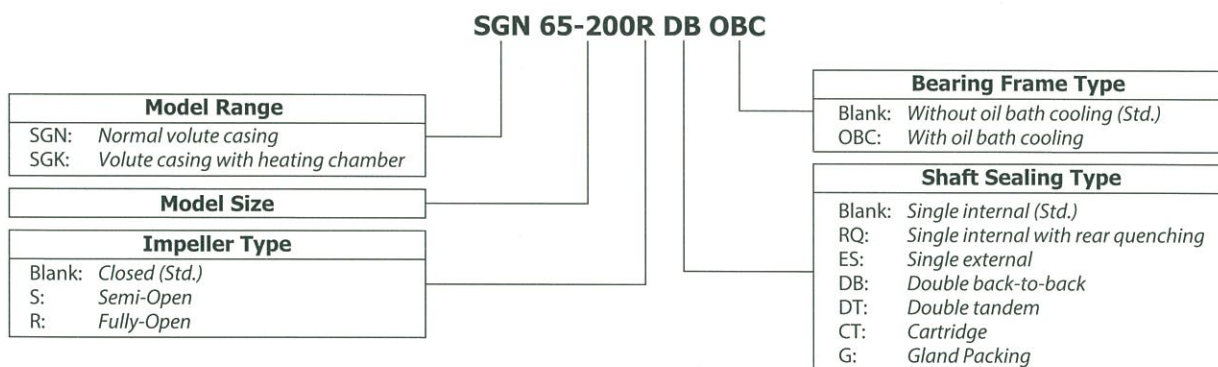

PART NO. NOTATIONS

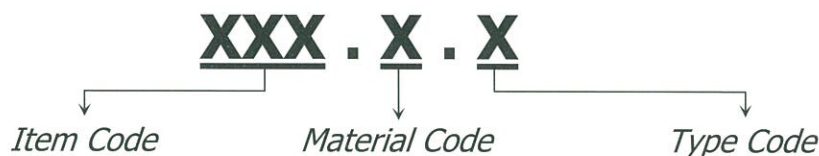

- Part No. with standard material and type are shown in the parts list.

Example Part No. : 120.1.C (Item = Impeller Material = SS304 Type = Closed)

Item Code

- For parts which have no variation in material and type, Part No. contains of Item Code only.

Example Part No. : 440 (Item = Deflector)

Material Code

For Item Codes 100, 104, 120, 133, 134, 206, 212, 213, 214, 215, 218, 401, 402, 409 and 463 only :

1 = SS304	4 = Ni-Hard	7 = Alloy 20
2 = SS316	5 = Cast Iron	8 = Mild Steel
3 = CA40	6 = Ductile Iron	9 = CD 4MCu

For Item Codes 200, 204 and 205 only :

Material codes according to DIN 24960 Standard.

Example : BVVGG = Carbon vs. Ceramic with Viton elastomers

- Available materials for the above items are depended on the product specifications.
- For parts which have no variation in type, Part No. contains of Item Code and Material Code only.

Example Part No. : 213.5 (Item = Gland Material = Cast Iron)

Type Code

For Item Code 100 only : J = With Heating Chamber

For Item Code 300 only : OBC = With Oil Bath Cooling

For Item Codes 100, 120 and 300 only :

C = Closed S= Semi-Open R = Fully-Open

For Item Code 212 only :

IS = Single Internal	RQ = Single Internal with Rear Quenching
ES = Single External	DB = Double Back-to-Back
DT = Double Tandem	G = Gland Packing

For Item Code 214 only :


M = Mechanical Sealing G = Gland Packing

- Available types for the above items are depended on the product specifications.

Example Part No. : 212.2.DB (Item = Stuffing Box Cover Material = SS316 Type = Double Back-to-Back)

Kewpump (M) Sdn. Bhd. reserves the right to change the materials and types to keep pace with technological progress.

STANDARD ARRANGEMENT

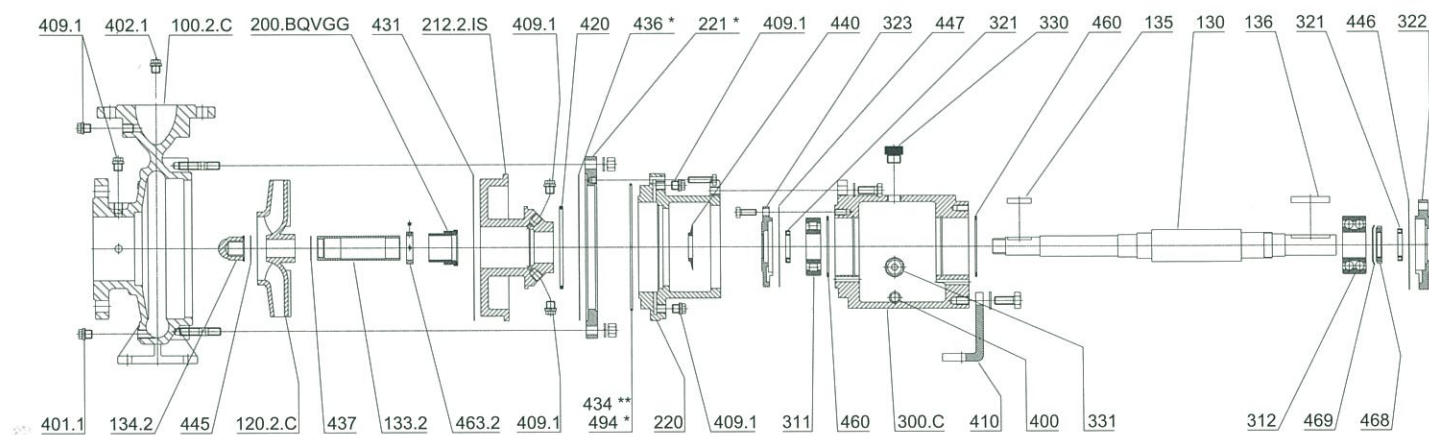


Part No.	Description	Standard Material
100.2.C	Casing for Closed Impeller	Stainless Steel 316
100.2.CJ	Casing for Closed Impeller with Heating Chamber	Stainless Steel 316
100.2.S/R	Casing for Open Type Impeller	Stainless Steel 316
100.2.S/RJ	Casing for Open Type Impeller with Heating Chamber	Stainless Steel 316
104.2	Casing Wear Plate	Stainless Steel 316
120.2.C	Closed Impeller	Stainless Steel 316
120.2.S	Semi-Open Impeller	Stainless Steel 316
120.2.R	Fully-Open Impeller	Stainless Steel 316
130	Shaft	Stainless Steel 304
133.2	Shaft Sleeve	Stainless Steel 316
134.2	Impeller Nut	Stainless Steel 316
135	Key for Impeller	Stainless Steel 304
136	Shaft End Key	Stainless Steel 304
200.BQVGG	Mechanical Seal	Carbon vs. Silicon Carbide
201	Packing	P.T.F.E.
202	V-Seal	Synthetic Rubber
204.BQVGG	Pump End Mechanical Seal	Carbon vs. Silicon Carbide
205.BQVGG	Atmospheric End Mechanical Seal	Carbon vs. Silicon Carbide
206.2	Lantern Ring	Stainless Steel 316
212.2.IS	Stuffing Box Cover for Single Internal	Stainless Steel 316
212.2.RQ	Stuffing Box Cover for Single Internal with Rear Quenching	Stainless Steel 316
212.2.ES	Stuffing Box Cover for Single External	Stainless Steel 316
212.2.DB	Stuffing Box Cover for Double Back-to-Back	Stainless Steel 316
212.2.DT	Stuffing Box Cover for Double Tandem	Stainless Steel 316
212.2.G	Stuffing Box Cover for Gland Packing	Stainless Steel 316
213.2	Gland	Stainless Steel 316
214.2.M	End Ring for Mechanical Sealing	Stainless Steel 316
214.2.G	End Ring for Gland Packing	Stainless Steel 316
215.2	Seal Cover	Stainless Steel 316
220	Frame Adaptor	Cast Iron
221 *	Adaptor Extension Ring	Cast Iron
300.C	Bearing Frame for Closed Impeller	Cast Iron

Part No.	Description	Standard Material
300.COBC	Bearing Frame for Closed Impeller with Oil Bath Cooling	Cast Iron
300.S/R	Bearing Frame for Open Type Impeller	Cast Iron
300.S/ROBC	Bearing Frame for Open Type Impeller with Oil Bath Cooling	Cast Iron
303	Adjustable Bearing Box	Cast Iron
311	Pump End Bearing	Steel
312	Drive End Bearing	Steel
321	Oil Seal	Synthetic Rubber
322	Drive End Bearing Cover	Cast Iron
323	Pump End Bearing Cover	Cast Iron
330	Oil Cover	Alluminium Alloy
331	Oil Gauge	Plastic Threaded
340	Bearing Frame Cooling Coil	Copper
400	Bearing Frame Drain Plug	Stainless Steel 304
401.1	Casing Drain Plug	Stainless Steel 304
402.1	Venting Plug	Stainless Steel 304
409.1	Connection Plug	Stainless Steel 304
410	Support Foot	Cast Iron
420	Stuffing Box Cover "O" Ring	Synthetic Rubber
428	Bearing Box "O" Ring	Synthetic Rubber
431	Stuffing Box Cover Gasket	P.T.F.E.
434 **	Frame Adaptor Gasket	Asbestos Sheet
436 *	Adaptor Extension Ring Gasket	Asbestos Sheet
437	Shaft Sleeve Gasket	P.T.F.E.
438	Seal Cover Gasket	P.T.F.E.
440	Deflector	Synthetic Rubber
445	Impeller Nut Gasket	P.T.F.E.
446	Drive End Bearing Cover Gasket	Oil Proof Paper
447	Pump End Bearing Cover Gasket	Oil Proof Paper
448	End Ring Gasket	P.T.F.E.
460	Cir Clip	Steel
463.2	Abutment Ring	Stainless Steel 316
468	Bearing Nut	Steel
469	Bearing Washer	Steel
481	Cooling Coil Adaptor	Stainless Steel 304
491	Cooling Coil "O" Ring	Synthetic Rubber
494 *	Frame Adaptor "O" Ring	Synthetic Rubber


* For all models except 32-130, 40-130, 50-130, 65-130, 65-160, 80-160, 100-260, 125-260, 125-320, 125-400, 150-200, 150-260 and 150-320

** For models 32-130, 40-130, 50-130, 65-130, 65-160, 80-160, 100-260, 125-260, 125-320, 125-400, 150-200, 150-260 and 150-320


DESIGN VARIANTS

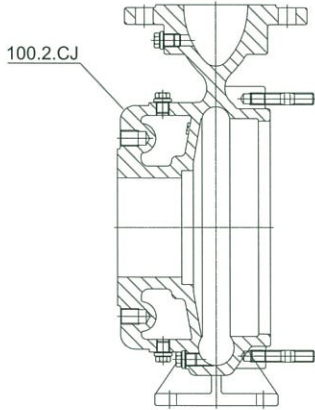


Casing with Heating Chamber

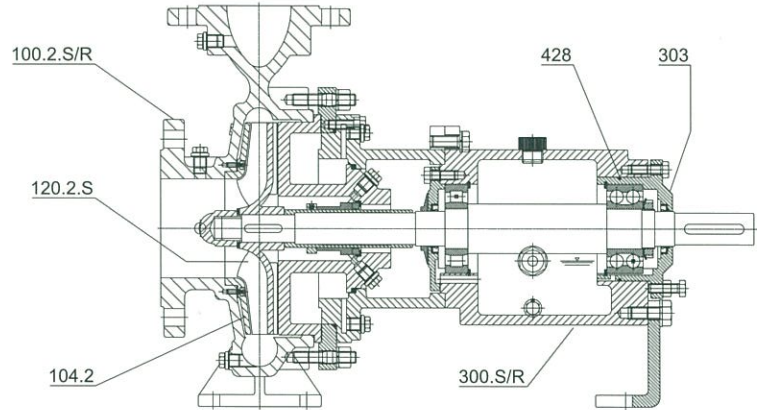

Open Type Impeller with Casing Wear Plate and Axial Adjustment

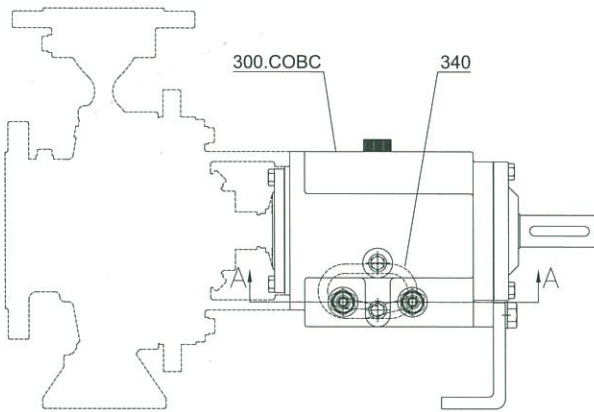


Bearing Frame with Oil Bath Cooling




Section A-A


SHAFT SEAL OPTIONS




Single Internal with Rear Quenching




Single External




Double Back-to-Back

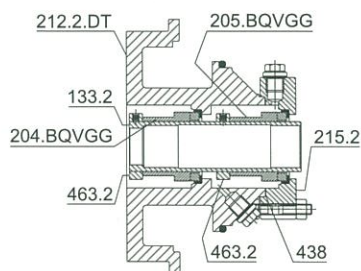

Double Tandem




Gland Packing

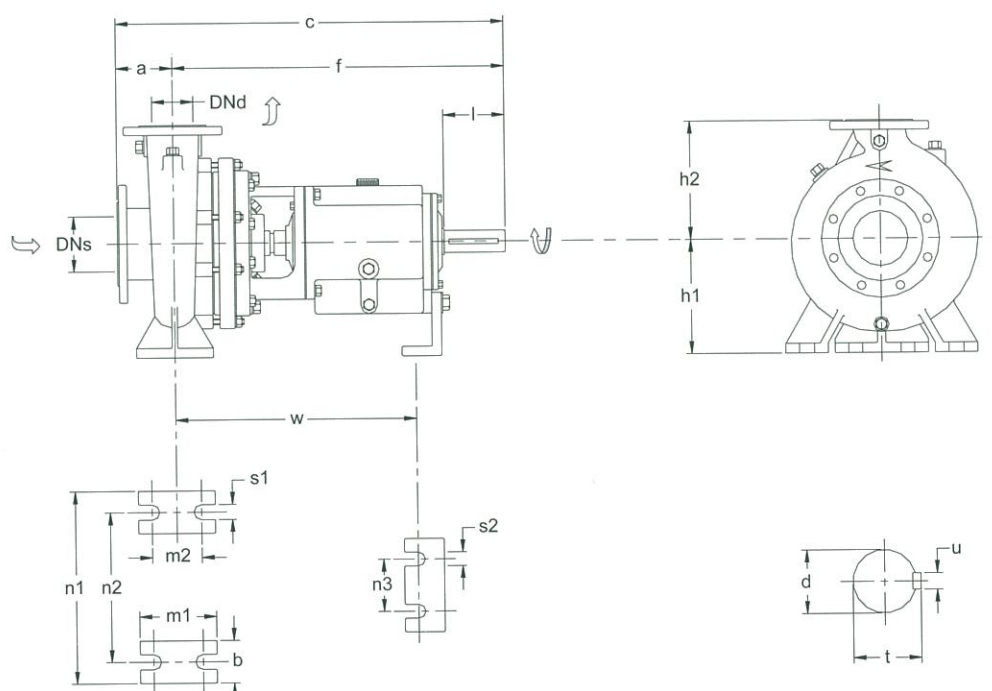

Dimensions in mm																				
PUMP MODEL	Flanges		Pump Dimensions					Foot Dimensions								Shaft End				
	DNd	DNs	a	f	c	h1	h2	b	m1	m2	n1	n2	n3	s1	s2	w	d	l	t	u
32-130	32	50	80	385	465	112	140	50	100	70	190	140	110	14	14	285	24	50	27	8
32-160						132	160				240	190								
32-200						160	180				320	250								
32-260						180	225				370	320								
40-130	40	65	80	385	465	112	140	50	100	70	210	160	110	14	14	285	24	50	27	8
40-160						132	160				240	190								
40-200						160	180				265	212								
40-260						180	225				320	250								
40-320	50	80	100	385	465	112	140	50	100	70	210	160	110	14	14	285	24	50	27	8
50-130						132	160				240	190								
50-160						160	180				265	212								
50-200						180	225				320	250								
50-260	65	100	125	500	625	200	250	65	125	95	345	280	110	14	14	370	32	80	35	10
50-320						225	280				370	320								
65-130						132	160				240	190								
65-160						160	180				265	212								
65-200	80	125	150	500	625	200	250	65	125	95	345	280	110	14	14	370	32	80	35	10
65-260						225	280				370	320								
65-320 ¹⁾						250	315				400	315								
80-130						280	355				435	355								
80-160	100	150	175	500	625	200	250	65	125	95	345	280	110	14	14	370	32	80	35	10
80-200						225	280				400	315								
80-260						250	315				435	355								
80-320 ¹⁾						280	355				400	315								
80-400 ¹⁾	125	200	225	500	625	200	250	65	125	95	345	280	110	14	14	370	32	80	35	10
100-160 ²⁾						225	280				400	315								
100-200						250	315				435	355								
100-260 ¹⁾						280	355				400	315								
100-320 ¹⁾	150	250	275	500	625	200	250	65	125	95	345	280	110	14	14	370	32	80	35	10
100-400 ¹⁾						225	280				400	315								
125-200 ²⁾						250	315				435	355								
125-260 ¹⁾						280	355				400	315								
125-320 ¹⁾	200	300	325	500	625	200	250	65	125	95	345	280	110	14	14	370	32	80	35	10
125-400 ¹⁾						225	280				400	315								
150-200 ²⁾						250	315				435	355								
150-260 ¹⁾						280	355				400	315								
150-320	250	350	375	500	625	200	250	65	125	95	345	280	110	14	14	370	32	80	35	10
150-400						225	280				400	315								

¹⁾ In these models the dimension "l" is 15mm shorter than the specified in ISO 2858. The dimension "f" is according to ISO 2858
²⁾ These models are additional sizes and not specified in ISO 2858

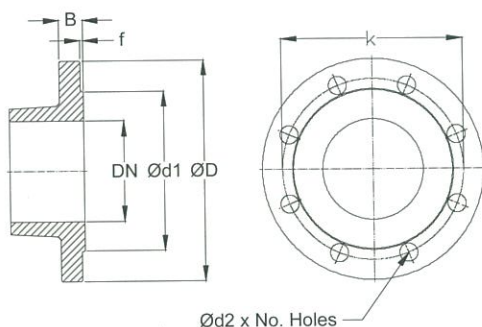


Dimensions in mm								
Nominal Dia.	Flange	Raised Face	Drilling*		Bolting			
DN	D	B	d1	f	No.	d2	k	
32	140	18	76	2	4	18	100	M16
40	150	18	84	2	4	18	110	M16
50	165	20	99	2	4	18	125	M16
65	185	20	118	2	4**	18	145	M16
80	200	20	132	2	8	18	160	M16
100	220	22	156	2	8	18	180	M16
125	250	22	184	2	8	18	210	M16
150	285	24	211	2	8	22	240	M20
200	340	24	266	2	12	22	295	M20

Flange dimensions and drilling according to ISO 7005-1:1992 - PN16

* Holes equally spaced straddling pump centreline

** Number of holes drilled less than the specified in ISO 7005-1:1992 - PN16

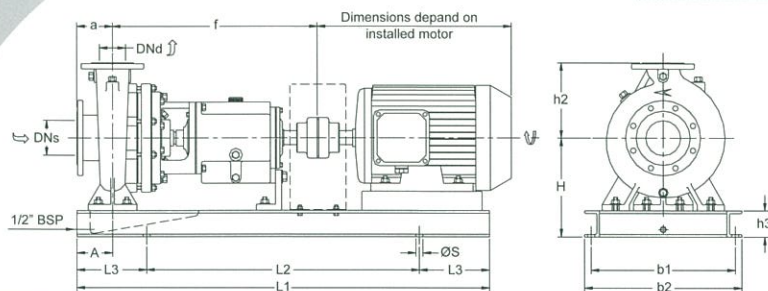

Baseplate Dimensions According to ISO 3661

Baseplate Number	Dimensions in mm							For Bolt
	b1	b2	h3	L1	L2	L3	S	
3661.2	320	360	100	800	540	130	18	M16
3661.3	350	390	100	900	600	150	18	M16
3661.4	400	450	100	1000	660	170	22	M20
3661.5	440	490	100	1120	740	190	22	M20
3661.6	490	540	100	1250	840	205	22	M20
3661.7	550	610	125	1400	940	230	26	M24
3661.8	600	660	125	1600	1060	270	26	M24
3661.9	670	730	150	1800	1200	300	26	M24



PUMP MODEL	Flanges		Set Dimensions				Dimensions in mm																H and the Standardized Baseplate Number, in Terms of Motor Size (I.E.C.)							
	DNd	DNs	a	f	A	h2	71M	80M	90S	90L	100L	112M	132S	132M	160M	160L	180M	180L	200L	225S	225M	250M	280S	280M						
32-130	32	50	80	385	60	140	212 3661.2																							
32-160						160	232 3661.2							3661.3																
32-200						180		260 3661.2							3661.3			260	3661.4											
32-260						225		100	500	75				280 3661.4					3661.5	3661.6										
40-130	40	65	80	385	60	140	212 3661.2						232 3661.3																	
40-160						160	232 3661.2							3661.3			260	3661.4												
40-200						180		260 3661.3									260	3661.4												
40-260			225								280 3661.4					3661.5	3661.6				325 3661.7									
40-320			250		125	500	75								300 3661.5															
50-130	50	80	100	385	60	160	232 3661.2								260 3661.4															
50-160						180		260 3661.3								260	3661.4													
50-200						200		260 3661.3								260	3661.4	3661.5		325 3661.7										
50-260			225											280 3661.4	3661.5	3661.6				325 3661.7		350 3661.7	375 3661.8							
50-320			280		125	500	75								325 3661.5		3661.6													
65-130	65	100	100	385	75	180	260 3661.4								260 3661.4	3661.5														
65-160						200		260 3661.4								260		280												
65-200						225								280 3661.4				3661.5	3661.6				325 3661.7		350 3661.7					
65-260			250											300 3661.5			300	3661.6		325 3661.7		350 3661.7	375 3661.8	430 3661.9						
65-320			280		125	530	90										325 3661.6													
80-160	80	125	125	500	75	225	280 3661.4								280 3661.5	3661.6			325 3661.7											
80-200						250		280 3661.5									3661.6			325 3661.7		350 3661.7	375 3661.8							
80-260						280		325 3661.6												350 3661.7		350 3661.7	375 3661.8		430 3661.9					
80-320			315													350 3661.6			375 3661.7											
80-400			355		530		90																							
100-160	100	125	125	500	90	280	300 3661.5								300 3661.6				325 3661.7											
100-200						315		300 3661.5													325 3661.7		350 3661.7	375 3661.8	430 3661.9					
100-260						350		325 3661.6											350 3661.7		350 3661.7	375 3661.8		430 3661.9						
100-320			375													350 3661.6			375 3661.7											
100-400			390		530		110													405 3661.8										
125-200	125	150	140	500	90	315									350 3661.6							375 3661.8		430 3661.9						
125-260						355										350 3661.6			375 3661.7											
125-320						390													405 3661.8											
125-400			420																440 3661.8				465 3661.9							
150-200	150	200	160	500	110	375									405 3661.8															
150-260						405													405 3661.8											
150-320						435																465 3661.9								
150-400			465																			465 3661.9								

Baseplate selection based on TECO motor type AEEB and standard couplings

Motor Size and Power IP-55, Standardized to I.E.C.

Power hp at 50 Hz	0.5	0.75	1.0	1.5	2.0	3.0	4.0	5.5	7.5	10	15	20	25	30	40	50	60	75	100	125
Motor Size of 4 Pole	71M	80M		90S	90L	100L		112M	132S	132M	160M	160L	180M	180L	200L	225S	225M	250M	280S	280M
Motor Size of 2 Pole	71M		80M		90S	90L	100L	112M	132S	160M		160L	180M	200L		225M	250M	280S	280M	

Product specifications subject to change without prior notice.

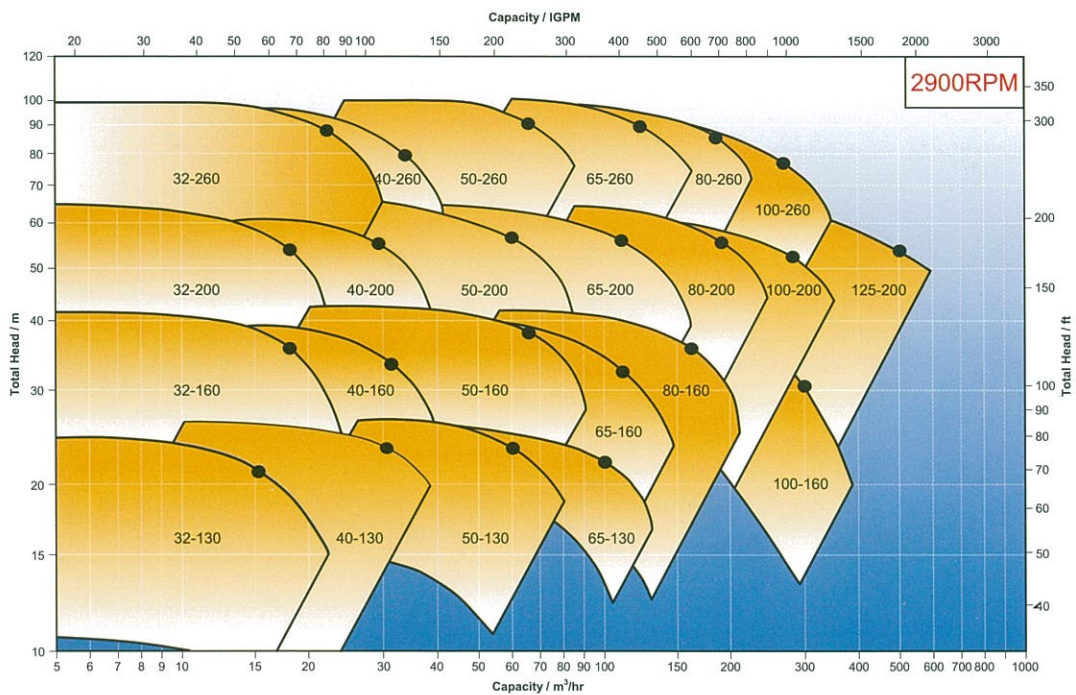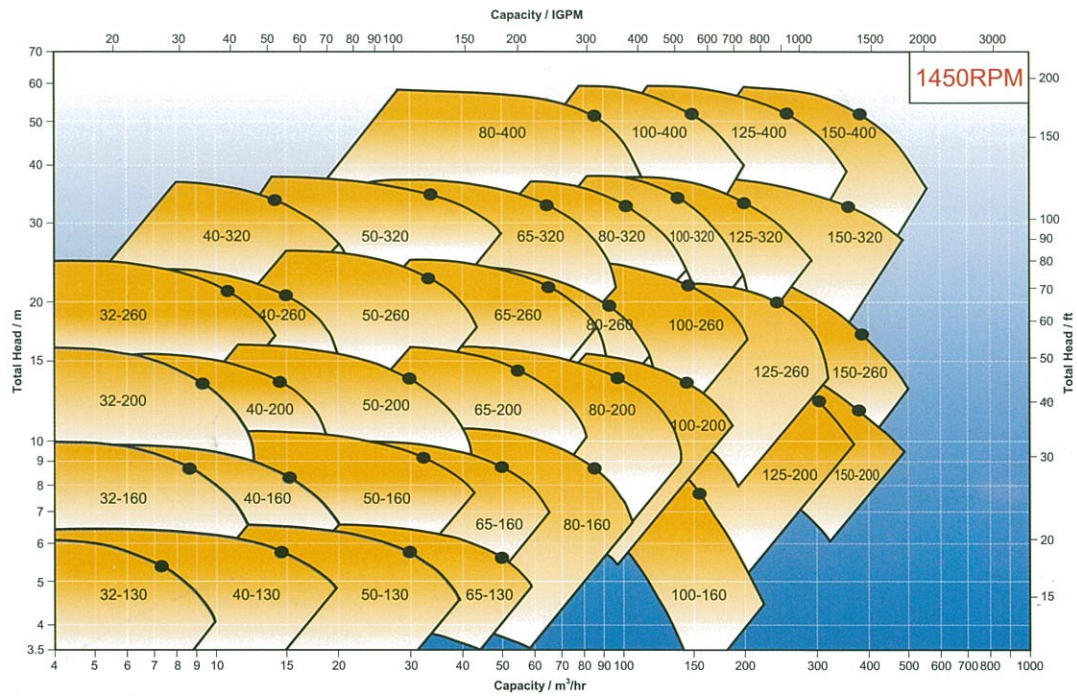

Curves for reference only. For final selection refer to individual pump curve.
Black dots on curves show best efficiency points.

