



# The Duckietown Book

..



The last version of this book and other documents are available at the URL  
<http://book.duckietown.org/>

# TABLE OF CONTENTS



<b>Part 1 - The Duckietown project .....</b>	<b>12</b>
<b>Chapter 1 - What is Duckietown?.....</b>	<b>13</b>
Section 1.1 - Goals and objectives.....	13
Section 1.2 - Learn about the Duckietown educational experience.....	13
Section 1.3 - Learn about the platform.....	13
<b>Chapter 2 - Duckietown history and future.....</b>	<b>15</b>
Section 2.1 - The beginnings of Duckietown .....	15
Section 2.2 - University-level classes in 2016.....	16
Section 2.3 - University-level classes in 2017.....	16
Section 2.4 - Chile.....	17
Section 2.5 - Duckietown High School.....	17
<b>Chapter 3 - First steps.....</b>	<b>18</b>
Section 3.1 - How to get started .....	18
Section 3.2 - Duckietown for instructors .....	18
Section 3.3 - Duckietown for self-guided learners .....	18
Section 3.4 - Introduction for companies.....	18
Section 3.5 - How to keep in touch .....	18
Section 3.6 - How to contribute .....	18
Section 3.7 - Frequently Asked Questions .....	18
<b>Chapter 4 - Accounts .....</b>	<b>20</b>
Section 4.1 - Complete list of accounts.....	20
Section 4.2 - For other contributors.....	20
<b>Part 2 - Duckumentation documentation .....</b>	<b>21</b>
<b>Chapter 5 - Contributing to the documentation .....</b>	<b>22</b>
Section 5.1 - Where the documentation is .....	22
Section 5.2 - Editing links.....	22
Section 5.3 - Comments .....	22
Section 5.4 - Installing the documentation system .....	22
Section 5.5 - Compiling the documentation .....	23
Section 5.6 - Troubleshooting compilation .....	24
Section 5.7 - The workflow to edit documentation .....	24
Section 5.8 - *Deploying the documentation .....	25
Section 5.9 - *Compiling the PDF version .....	25
<b>Chapter 6 - Features of the documentation writing system.....</b>	<b>27</b>
Section 6.1 - Markdown .....	27
Section 6.2 - Embedded LaTeX .....	27
Section 6.3 - LaTeX symbols.....	27
Section 6.4 - Variables in command lines and command output .....	27
Section 6.5 - Character escapes .....	28
Section 6.6 - Keyboard keys .....	28
Section 6.7 - Figures .....	28
Section 6.8 - Subfigures.....	29
Section 6.9 - Shortcut for tables .....	30
Section 6.10 - Linking to documentation from inside and outside the documentation.....	30
Section 6.11 - Embedding videos .....	31
Section 6.12 - Bibliography .....	32
<b>Chapter 7 - Documentation style guide .....</b>	<b>33</b>
Section 7.1 - General guidelines for technical writing.....	33
Section 7.2 - Style guide for the Duckietown documentation.....	33
Section 7.3 - Writing command lines .....	33
Section 7.4 - Frequently misspelled words .....	34
Section 7.5 - Other conventions .....	34

Section 7.6 - Troubleshooting sections .....	34
<b>Chapter 8 - Knowledge graph .....</b>	<b>36</b>
Section 8.1 - Formalization.....	36
Section 8.2 - Atoms properties .....	37
Section 8.3 - Markdown format for text-like atoms .....	37
Section 8.4 - How to describe the semantic graphs of atoms .....	38
Section 8.5 - How to describe modules .....	38
<b>Part 3 - Operation manual - Duckiebot .....</b>	<b>39</b>
<b>Chapter 9 - Duckiebot configurations .....</b>	<b>40</b>
Section 9.1 - Configuration list.....	40
Section 9.2 - Configuration functionality.....	40
<b>Chapter 10 - Acquiring the parts for the Duckiebot C0 .....</b>	<b>42</b>
Section 10.1 - Bill of materials.....	42
Section 10.2 - Chassis .....	42
Section 10.3 - Raspberry Pi 3 - Model B .....	43
Section 10.4 - Camera .....	45
Section 10.5 - DC Stepper Motor HAT .....	46
Section 10.6 - Battery .....	47
Section 10.7 - Standoffs, Nuts and Screws .....	47
Section 10.8 - Zip Tie.....	47
Section 10.9 - Configuration C0-w .....	48
Section 10.10 - Configuration C0-j .....	48
Section 10.11 - Configuration C0-d .....	49
<b>Chapter 11 - Acquiring the parts for the Duckiebot C1 .....</b>	<b>50</b>
Section 11.1 - Bill of materials.....	50
Section 11.2 - LEDs .....	50
Section 11.3 - Bumpers .....	52
Section 11.4 - Headers, resistors and jumper .....	52
<b>Chapter 12 - Soldering boards for C0 .....</b>	<b>54</b>
<b>Chapter 13 - Soldering boards for C1 .....</b>	<b>55</b>
<b>Chapter 14 - Assembling the Duckiebot C0 .....</b>	<b>56</b>
<b>Chapter 15 - Assembling the Duckiebot C1 .....</b>	<b>57</b>
<b>Chapter 16 - Reproducing the image .....</b>	<b>58</b>
Section 16.1 - Download and uncompress the Ubuntu Mate image .....	58
Section 16.2 - Burn the image to an SD card .....	58
Section 16.3 - Raspberry Pi Config .....	59
Section 16.4 - Install packages .....	59
Section 16.5 - Install Edimax driver .....	60
Section 16.6 - Install ROS .....	60
Section 16.7 - Wireless configuration (old version) .....	60
Section 16.8 - Wireless configuration .....	61
Section 16.9 - SSH server config .....	63
Section 16.10 - Create swap Space .....	63
Section 16.11 - Passwordless sudo .....	64
Section 16.12 - Clean up .....	64
Section 16.13 - Ubuntu user configuration .....	65
Section 16.14 - Check that all required packages were installed .....	66
Section 16.15 - Creating the image .....	66
Section 16.16 - Some additions since last image to add in the next image .....	66
<b>Chapter 17 - Installing Ubuntu on laptops .....</b>	<b>68</b>
Section 17.1 - Install Ubuntu .....	68
Section 17.2 - Install useful software .....	68
Section 17.3 - Install ROS .....	69
Section 17.4 - Other suggested software .....	69
Section 17.5 - Installation of the duckuments system .....	69
Section 17.6 - Passwordless sudo .....	69
Section 17.7 - SSH and Git setup .....	69
<b>Chapter 18 - Duckiebot Initialization .....</b>	<b>71</b>
Section 18.1 - Acquire and burn the image .....	71

Section 18.2 - Turn on the Duckiebot.....	71
Section 18.3 - Connect the Duckiebot to a network.....	72
Section 18.4 - Ping the Duckiebot .....	72
Section 18.5 - SSH to the Duckiebot .....	72
Section 18.6 - (For D17-C1) Configure the robot-generated network .....	72
Section 18.7 - Setting up wireless network configuration .....	73
Section 18.8 - Update the system .....	74
Section 18.9 - Give a name to the Duckiebot.....	74
Section 18.10 - Change the hostname .....	74
Section 18.11 - Expand your filesystem.....	75
Section 18.12 - Create your user .....	76
Section 18.13 - Other customizations.....	77
Section 18.14 - Hardware check: camera .....	77
<b>Chapter 19 - Software setup and RC remote control .....</b>	<b>79</b>
Section 19.1 - Clone the Duckietown repository.....	79
Section 19.2 - Set up ROS environment on the Duckiebot.....	79
Section 19.3 - Add your vehicle to the scuderia file.....	80
Section 19.4 - Test that the joystick is detected .....	80
Section 19.5 - Run the joystick demo .....	80
Section 19.6 - The proper shutdown procedure for the Raspberry Pi .....	81
<b>Chapter 20 - Reading from the camera .....</b>	<b>83</b>
Section 20.1 - Check the camera hardware.....	83
Section 20.2 - Create two windows.....	83
Section 20.3 - First window: launch the camera nodes .....	83
Section 20.4 - Second window: view published topics.....	84
<b>Chapter 21 - RC control launched remotely .....</b>	<b>85</b>
Section 21.1 - Two ways to launch a program .....	85
Section 21.2 - Download and setup Software repository on the laptop .....	85
Section 21.3 - Edit the machines files on your laptop .....	85
Section 21.4 - Start the demo .....	85
Section 21.5 - Watch the program output using rqt_console.....	86
Section 21.6 - Troubleshooting.....	86
<b>Chapter 22 - RC+camera remotely.....</b>	<b>87</b>
Section 22.1 - Assumptions .....	87
Section 22.2 - Terminal setup .....	87
Section 22.3 - First window: launch the joystick demo .....	87
Section 22.4 - Second window: launch the camera nodes.....	87
Section 22.5 - Third window: view data flow .....	88
Section 22.6 - Fourth window: visualize the image using rviz.....	88
Section 22.7 - Proper shutdown procedure .....	88
<b>Chapter 23 - Interlude: Ergonomics.....</b>	<b>90</b>
Section 23.1 - set_ros_master.sh .....	90
Section 23.2 - SSH aliases .....	90
<b>Chapter 24 - Wheel calibration .....</b>	<b>92</b>
<b>Chapter 25 - Camera calibration .....</b>	<b>93</b>
Chapter 26 - Taking a log.....	94
<b>Part 4 - Operation manual - Duckietowns .....</b>	<b>95</b>
<b>Chapter 27 - Duckietown parts .....</b>	<b>96</b>
<b>Chapter 28 - Duckietown Assembly .....</b>	<b>97</b>
<b>Chapter 29 - The Duckietown specification .....</b>	<b>98</b>
Section 29.1 - Topology .....	98
Section 29.2 - Signs placement.....	98
<b>Chapter 30 - Traffic lights .....</b>	<b>99</b>
<b>Part 5 - Operation manual - Duckiebot with LEDs.....</b>	<b>100</b>
<b>Chapter 31 - D17-1 (LEDs) parts .....</b>	<b>101</b>
<b>Chapter 32 - D17-1 (LEDs) assembly .....</b>	<b>102</b>
<b>Chapter 33 - D17-1 (LEDs) setup .....</b>	<b>103</b>

<b>Part 6 - Theory chapters.....</b>	<b>104</b>
Chapter 34 - Chapter template.....	105
Chapter 35 - Symbols and conventions.....	106
Section 35.1 - Conventions .....	106
Section 35.2 - Table of symbols .....	106
Chapter 36 - Linear algebra.....	107
Chapter 37 - Probability basics.....	108
Chapter 38 - Dynamics .....	109
Chapter 39 - Autonomy overview.....	110
Section 39.1 - Perception, planning, control.....	110
Chapter 40 - Autonomy architectures .....	111
Section 40.1 - Contracts .....	111
Chapter 41 - Representations.....	112
Section 41.1 - Preliminaries.....	112
Section 41.2 - Robot Representations .....	112
Section 41.3 - Environment Representations .....	112
Chapter 42 - Software architectures and middlewares.....	113
Chapter 43 - Modern signal processing.....	114
Chapter 44 - Basic Kinematics .....	115
Chapter 45 - Basic Dynamics .....	116
Chapter 46 - Odometry Calibration.....	117
Chapter 47 - Computer vision basics.....	118
Chapter 48 - Illumination invariance.....	119
Chapter 49 - Line Detection .....	120
Chapter 50 - Feature extraction .....	121
Chapter 51 - Place recognition .....	122
Chapter 52 - Filtering 1 .....	123
Chapter 53 - Filtering 2.....	124
Chapter 54 - Mission planning.....	125
Chapter 55 - Planning in discrete domains .....	126
Chapter 56 - Motion planning.....	127
Chapter 57 - RRT .....	128
Chapter 58 - Feedback control .....	129
Chapter 59 - PID Control.....	130
Chapter 60 - MPC Control.....	131
Chapter 61 - Object detection.....	132
Chapter 62 - Object classification .....	133
Chapter 63 - Object tracking .....	134
Chapter 64 - Reacting to obstacles.....	135
Chapter 65 - Semantic segmentation .....	136
Chapter 66 - Text recognition.....	137
Chapter 67 - SLAM - Problem formulation .....	138
Chapter 68 - SLAM - Broad categories .....	139
Chapter 69 - VINS .....	140
Chapter 70 - Advanced place recognition .....	141
Chapter 71 - Fleet level planning (placeholder).....	142
Chapter 72 - Fleet level planning (placeholder).....	143
Chapter 73 - Bibliography.....	144
<b>Part 7 - Exercises .....</b>	<b>145</b>
<b>Chapter 74 - ROS Exercises .....</b>	<b>146</b>
Section 74.1 - Parameters.....	146
Section 74.2 - Running from a log .....	146
Section 74.3 - Unit tests .....	146
Section 74.4 - Analytics.....	146
Section 74.5 - Visualization .....	146
<b>Chapter 75 - Line detection .....</b>	<b>147</b>
<b>Chapter 76 - Data processing .....</b>	<b>148</b>

<b>Chapter 77 - Git and conventions .....</b>	<b>149</b>
<b>Part 8 - Software manuals.....</b>	<b>150</b>
<b>Chapter 78 - Ubuntu packaging with APT .....</b>	<b>151</b>
Section 78.1 - apt install .....	151
Section 78.2 - apt update .....	151
Section 78.3 - apt-key .....	151
Section 78.4 - apt-mark .....	151
Section 78.5 - add-apt-repository .....	151
Section 78.6 - wajig .....	151
Section 78.7 - dpigs .....	151
<b>Chapter 79 - GNU/Linux general notions .....</b>	<b>152</b>
Section 79.1 - Background reading .....	152
<b>Chapter 80 - Every day Linux.....</b>	<b>153</b>
Section 80.1 - cd .....	153
Section 80.2 - sudo.....	153
Section 80.3 - ls .....	153
Section 80.4 - cp .....	153
Section 80.5 - mkdir .....	153
Section 80.6 - touch .....	153
Section 80.7 - reboot .....	153
Section 80.8 - shutdown.....	153
Section 80.9 - rm .....	153
<b>Chapter 81 - Users .....</b>	<b>154</b>
Section 81.1 - passwd .....	154
<b>Chapter 82 - UNIX tools .....</b>	<b>155</b>
Section 82.1 - cat .....	155
Section 82.2 - tee.....	155
Section 82.3 - truncate.....	155
<b>Chapter 83 - Linux disks and files .....</b>	<b>156</b>
Section 83.1 - fdisk .....	156
Section 83.2 - mount .....	156
Section 83.3 - umount .....	156
Section 83.4 - losetup .....	156
Section 83.5 - gparted .....	156
Section 83.6 - dd .....	156
Section 83.7 - sync.....	156
Section 83.8 - df .....	156
<b>Chapter 84 - Other administration commands .....</b>	<b>157</b>
Section 84.1 - visudo .....	157
Section 84.2 - update-alternatives .....	157
Section 84.3 - udevadm .....	157
Section 84.4 - systemctl .....	157
<b>Chapter 85 - Make .....</b>	<b>158</b>
Section 85.1 - make .....	158
<b>Chapter 86 - Python-related tools .....</b>	<b>159</b>
Section 86.1 - virtualenv .....	159
Section 86.2 - pip.....	159
<b>Chapter 87 - Raspberry-PI commands .....</b>	<b>160</b>
Section 87.1 - raspi-config.....	160
Section 87.2 - vcgencmd.....	160
Section 87.3 - raspistill .....	160
Section 87.4 - jstest .....	160
Section 87.5 - swapon .....	160
Section 87.6 - mkswap .....	160
<b>Chapter 88 - Users and permissions .....</b>	<b>161</b>
Section 88.1 - chmod .....	161
Section 88.2 - groups .....	161
Section 88.3 - adduser .....	161
Section 88.4 - useradd .....	161

<b>Chapter 89 - Downloading .....</b>	162
Section 89.1 - curl.....	162
Section 89.2 - sha256sum .....	162
Section 89.3 - xz .....	162
<b>Chapter 90 - Shells and environments .....</b>	163
Section 90.1 - source .....	163
Section 90.2 - which .....	163
Section 90.3 - export .....	163
<b>Chapter 91 - Other misc commands.....</b>	164
Section 91.1 - pgrep .....	164
Section 91.2 - npm.....	164
Section 91.3 - node.js .....	164
Section 91.4 - ntpdate .....	164
Section 91.5 - chsh.....	164
Section 91.6 - echo.....	164
Section 91.7 - sh .....	164
Section 91.8 - fc-cache .....	164
<b>Chapter 92 - Linux resources usage.....</b>	165
Section 92.1 - Measuring CPU usage using htop .....	165
Section 92.2 - Measuring I/O usage using iotop.....	165
Section 92.3 - How fast is the SD card? .....	165
<b>Chapter 93 - SD Cards tools .....</b>	166
Section 93.1 - Testing SD Card and disk speed .....	166
Section 93.2 - How to burn an image to an SD card .....	166
Section 93.3 - How to shrink an image .....	167
<b>Chapter 94 - Networking tools.....</b>	170
Section 94.1 - hostname.....	170
Section 94.2 - Visualizing information about the network .....	170
<b>Chapter 95 - Accessing computers using SSH.....</b>	171
Section 95.1 - Background reading .....	171
Section 95.2 - Installation of SSH.....	171
Section 95.3 - Local configuration .....	171
Section 95.4 - How to login with SSH and a password .....	171
Section 95.5 - Creating an SSH keypair .....	172
Section 95.6 - How to login without a password .....	173
Section 95.7 - Fixing SSH Permissions .....	174
Section 95.8 - ssh-keygen .....	174
<b>Chapter 96 - Wireless networking in Linux.....</b>	175
Section 96.1 - iwconfig .....	175
Section 96.2 - iwlist .....	175
<b>Chapter 97 - Moving files between computers.....</b>	176
Section 97.1 - SCP .....	176
Section 97.2 - RSync .....	176
<b>Chapter 98 - VIM.....</b>	177
Section 98.1 - External documentation .....	177
Section 98.2 - Installation .....	177
Section 98.3 - vi .....	177
Section 98.4 - Suggested configuration .....	177
Section 98.5 - Visual mode .....	177
Section 98.6 - Indenting using VIM .....	177
<b>Chapter 99 - Atom .....</b>	178
<b>Chapter 100 - Eclipse .....</b>	179
Section 100.1 - Installing LiClipse .....	179
<b>Chapter 101 - Byobu .....</b>	180
Section 101.1 - Advantages of using Byobu .....	180
Section 101.2 - Installation .....	180
Section 101.3 - Documentation .....	180
Section 101.4 - Quick command reference .....	180
Section 101.5 - Commands on OS X .....	181
<b>Chapter 102 - Source code control with Git.....</b>	182

Section 102.1 - Background reading .....	182
Section 102.2 - Installation .....	182
Section 102.3 - Setting up global configurations for Git .....	182
Section 102.4 - Git tips .....	182
Section 102.5 - Git troubleshooting .....	182
Section 102.6 - git.....	183
<b>Chapter 103 - Git LFS .....</b>	184
Section 103.1 - Generic installation instructions .....	184
Section 103.2 - Ubuntu 16 installation (laptop) .....	184
Section 103.3 - Ubuntu 16 Mate installation (Raspberry Pi 3).....	184
<b>Chapter 104 - Setup Github access .....</b>	185
Section 104.1 - Create a Github account.....	185
Section 104.2 - Become a member of the Duckietown organization .....	185
Section 104.3 - Add a public key to Github.....	185
<b>Part 9 - Duckietown development guide.....</b>	187
<b>Chapter 105 - Configuration .....</b>	188
Section 105.1 - Environment variables.....	188
Section 105.2 - The scuderia file .....	188
Section 105.3 - The machines file.....	189
Section 105.4 - People database.....	189
<b>Chapter 106 - What the duck! .....</b>	190
Section 106.1 - Adding more tests to what-the-duck .....	190
Section 106.2 - Tests already added .....	190
Section 106.3 - List of tests to add .....	191
<b>Chapter 107 - Python .....</b>	193
Section 107.1 - Background reading .....	193
Section 107.2 - Python virtual environments .....	193
Section 107.3 - Useful libraries.....	193
<b>Chapter 108 - Introduction to ROS.....</b>	194
Section 108.1 - Install ROS .....	194
Section 108.2 - rqt_console .....	194
Section 108.3 - roslaunch.....	194
Section 108.4 - rviz.....	195
Section 108.5 - rostopic .....	195
Section 108.6 - catkin_make .....	195
Section 108.7 - rosrun .....	195
Section 108.8 - rostest .....	195
Section 108.9 - rosparam .....	195
Section 108.10 - rosparam.....	195
Section 108.11 - rosdep .....	195
Section 108.12 - Troubleshooting ROS.....	195
<b>Chapter 109 - How to create a ROS package .....</b>	196
Section 109.1 - Conforming ROS package checklist .....	196
<b>Chapter 110 - Integrate package in the architecture.....</b>	197
<b>Chapter 111 - Creating unit tests .....</b>	198
<b>Chapter 112 - Duckietown code conventions.....</b>	199
Section 112.1 - Python .....	199
<b>Chapter 113 - Minimal ROS node - pkg_name .....</b>	200
Section 113.1 - The files in the package .....	200
Section 113.2 - Writing a node: talker .py .....	201
Section 113.3 - The Talker class.....	203
Section 113.4 - Launch File .....	204
Section 113.5 - Testing the node .....	205
Section 113.6 - Documentation .....	207
Section 113.7 - Guidelines .....	207
<b>Chapter 114 - Duckietown Software architecture .....</b>	208
<b>Part 10 - Fall 2017 .....</b>	209

<b>Chapter 115 - General remarks.....</b>	<b>210</b>
Section 115.1 - The rules of Duckietown .....	210
Section 115.2 - Synchronization between classes.....	210
Section 115.3 - Accounts for students .....	210
Section 115.4 - Accounts for all instructors and TAs .....	210
<b>Chapter 116 - Additional information for ETH Z&amp;uuml;rich students.....</b>	<b>212</b>
<b>Chapter 117 - Additional information for UdeM students.....</b>	<b>213</b>
<b>Chapter 118 - Additional information for TTIC students .....</b>	<b>214</b>
<b>Chapter 119 - Additional information for NCTU students .....</b>	<b>215</b>
<b>Chapter 120 - Milestone: ROS node working .....</b>	<b>216</b>
<b>Chapter 121 - Homework: Take and process a log.....</b>	<b>217</b>
<b>Chapter 122 - Milestone: Calibrated robot.....</b>	<b>218</b>
<b>Chapter 123 - Homework: Camera geometry.....</b>	<b>219</b>
<b>Chapter 124 - Milestone: Illumination invariance.....</b>	<b>220</b>
<b>Chapter 125 - Homework: Place recognition .....</b>	<b>221</b>
<b>Chapter 126 - Milestone: Lane following.....</b>	<b>222</b>
<b>Chapter 127 - Homework: localization .....</b>	<b>223</b>
<b>Chapter 128 - Milestone: Navigation.....</b>	<b>224</b>
<b>Chapter 129 - Homework: group forming .....</b>	<b>225</b>
<b>Chapter 130 - Milestone: Ducks in a row.....</b>	<b>226</b>
<b>Chapter 131 - Homework: Comparison of PID.....</b>	<b>227</b>
<b>Chapter 132 - Homework: RRT .....</b>	<b>228</b>
<b>Chapter 133 - Caffe tutorial.....</b>	<b>229</b>
<b>Chapter 134 - Milestone: Object Detection.....</b>	<b>230</b>
<b>Chapter 135 - Homework: Object Detection .....</b>	<b>231</b>
<b>Chapter 136 - Milestone: Semantic perception .....</b>	<b>232</b>
<b>Chapter 137 - Homework: Semantic perception.....</b>	<b>233</b>
<b>Chapter 138 - Milestone: Reacting to obstacles.....</b>	<b>234</b>
<b>Chapter 139 - Homework: Reacting to obstacles .....</b>	<b>235</b>
<b>Chapter 140 - Milestone: SLAM demo .....</b>	<b>236</b>
<b>Chapter 141 - Homework: SLAM .....</b>	<b>237</b>
<b>Chapter 142 - Milestone: fleet demo .....</b>	<b>238</b>
<b>Chapter 143 - Homework: fleet.....</b>	<b>239</b>
<b>Chapter 144 - Project proposals .....</b>	<b>240</b>
<b>Chapter 145 - Template of a project.....</b>	<b>241</b>
Section 145.1 - Checklist for students .....	241
Section 145.2 - Checklist for TAs .....	241
<b>Part 11 - Packages - Infrastructure.....</b>	<b>242</b>
Chapter 146 - Package duckietown .....	243
Chapter 147 - Package duckietown_logs .....	244
Chapter 148 - Package duckietown_msgs .....	245
Chapter 149 - Package what_the_duck .....	246
Section 149.1 - What the duck .....	246
Section 149.2 - Adding more tests to what-the-duck .....	246
Section 149.3 - Tests already added .....	246
Section 149.4 - List of tests to add .....	247
<b>Part 12 - Packages - Lane control.....</b>	<b>249</b>
Chapter 150 - Package adafruit_drivers .....	250
Chapter 151 - Package anti_instagram .....	251
Chapter 152 - Package car_supervisor .....	252
Chapter 153 - Package dagu_car .....	253
Chapter 154 - Package ground_projection .....	254
Chapter 155 - Package joy_mapper .....	255
Section 155.1 - Test.....	255
Section 155.2 - Dependencies.....	255
Section 155.3 - Node: joy_mapper.py .....	255
Section 155.4 - Services .....	255

Chapter 156 - Package lane_control .....	256
Chapter 157 - Package lane_filter .....	257
Chapter 158 - Package line_detector .....	258
Chapter 159 - Package pi_camera.....	259
Part 13 - Packages - Indefinite navigation.....	260
Chapter 160 - Package fsm .....	261
Chapter 161 - Package indefinite_navigation.....	262
Chapter 162 - Package intersection_control .....	263
Chapter 163 - Package navigation.....	264
Chapter 164 - Package stop_line_filter .....	265
Part 14 - Packages - Localization and planning .....	266
Part 15 - Packages - Coordination.....	267
Part 16 - Packages - Additional functionality .....	268
Part 17 - Packages - Templates .....	269
Chapter 165 - Package pkg_name.....	270
Section 165.1 - Status .....	270
Chapter 166 - Package rostest_example .....	271
Part 18 - Packages - Convenience .....	272
Chapter 167 - Package duckietown_demos .....	273
Chapter 168 - Package duckietown_unit_test .....	274
Part 19 - Packages - To sort.....	275
Chapter 169 - Package adafruit_imu .....	276
Section 169.1 - Testing .....	276
Section 169.2 - Dependencies.....	276
Section 169.3 - Node adafruit_imu.....	276
Chapter 170 - Package apriltags_ros.....	277
Chapter 171 - Package duckie_rr_bridge .....	278
Chapter 172 - Package duckiebot_visualizer .....	279
Chapter 173 - Package duckietown_description.....	280
Chapter 174 - Package bag_stamper .....	281
Chapter 175 - Package kinematics .....	282
Chapter 176 - Package visual_odometry .....	283
Chapter 177 - LED emitter .....	284
Section 177.1 - LED detector .....	284
Section 177.2 - Unit tests .....	285
Chapter 178 - Package led_detection.....	286
Chapter 179 - Package led_emitter .....	287
Chapter 180 - Package led_interpreter .....	288
Chapter 181 - Package led_joy_mapper .....	289
Chapter 182 - Package rgb_led .....	290
Section 182.1 - Demos.....	290
Chapter 183 - Package traffic_light .....	291
Chapter 184 - Package localization .....	292
Chapter 185 - Package mdop .....	293
Chapter 186 - Package parallel_autonomy .....	294
Chapter 187 - Package scene_segmentation .....	295
Chapter 188 - Package veh_coordinator .....	296
Chapter 189 - Package vehicle_detection.....	297
Chapter 190 - Package visual_odometry_line .....	298

<b>Part 20 - Packages - Failed projects.....</b>	<b>299</b>
<b>Chapter 191 - Package mouse_encoder .....</b>	<b>300</b>
Section 191.1 - Publish Topic .....	300
Section 191.2 - Parameters.....	300
Section 191.3 - Getting access to /dev/input/mice.....	300
<b>Chapter 192 - Package simcity - Map Editor Version 0.1 .....</b>	<b>301</b>
Section 192.1 - How to run the map editor .....	301
Section 192.2 - How to edit the map.....	301
Section 192.3 - What am I looking at, anyway?.....	301
Section 192.4 - What else is there to do? .....	301
<b>Chapter 193 - Package slam.....</b>	<b>302</b>
<b>Chapter 194 - Package street_name_detector .....</b>	<b>303</b>

PART 1

# The Duckietown project



# CHAPTER 1

## What is Duckietown?

### 1.1. Goals and objectives

Duckietown is a robotics educations and outreach effort.

The most tangible goal of the project is to provide a low-cost educational platform for learning autonomy, consisting of the Duckiebots, an autonomous robot, and the Duckietowns, the infrastructure in which the Duckiebots navigate.

However, we focus on the *learning experience* as a whole, by providing a set of modules teaching plans and other guides, as well as a curated role-play experience.

We have two targets:

1. For **instructors**, we want to create a “class-in-a-box” that allows to offer a modern and engaging learning experience. Currently, this is feasible at the advanced undergraduate and graduate level, though in the future we would like to present the platform as multi-grade experiences.
2. For **self-guided learners**, we want to create a “self-learning experience”, that allows to go from zero knowledge of robotics to graduate-level understanding.

In addition, the Duckietown platform has been used as a research platform.

### 1.2. Learn about the Duckietown educational experience

This video is a Duckumentary about the first version of the class, during Spring 2016. The Duckumentary was shot by Chris Welch.

TODO: Add Duckumentary

Figure 1. The Duckumentary

See also this documentary by Red Hat:



Figure 2. The road to autonomy

If you'd like to know more about the educational experience, [1] present a more formal description of the course design for Duckietown: learning objectives, teaching methods, etc.

### 1.3. Learn about the platform

The best way to get a sense of how the platform looks is to watch these videos. They

show off the capabilities of the platform.

If you would like to know more, the paper [2] describes the Duckiebot and its software.  
(With 29 authors, we made the record for a robotics conference!)

Can you do it by night?



Figure 3. Cool Duckietown by night

## CHAPTER 2

# Duckietown history and future

### 2.1. The beginnings of Duckietown

The original Duckietown class was at MIT in 2016.



Figure 4. Part of the first MIT class, during the final demo.



Figure 5. The need for autonomy



Figure 6. Advertisement



Figure 7. The elves of Duckietown

## 2.2. University-level classes in 2016

Later that year, the Duckietown platform was also used in these classes:

- **NCTU 2016** - Prof. Nick Wang;
- **RPI 2016** - Prof. John Wen;



Figure 8. Duckietown at NCTU in 2016

## 2.3. University-level classes in 2017

In 2017, these four courses will be taught together, with the students interacting among institutions:

- **ETH Zürich 2017** - Prof. Emilio Frazzoli, Dr. Andrea Censi;
- **University of Montreal, 2017** - Prof. Liam Paull;
- **TTI/Chicago 2017** - Prof. Matthew Walter;
- National Chiao Tung University, Taiwan - Prof. Nick Wang's course;

Furthermore, the Duckietown platform is used also in the following universities:

- RPI (Jeff Trinkle)
- National Chiao Tung University, Taiwan - Prof. Yon-Ping Chen's *Dynamic system simulation and implementation*.
- Chosun University, Korea - Prof. Woosuk Sung's course;
- Petra Christian University, Indonesia - Prof. Resmana Lim's *Mobile Robot Design Course*

- National Tainan Normal University, Taiwan - Prof. Jen-Jee Chen's *Vehicle to Everything* (V2X) Course;
- Yuan Zhu University, Taiwan - Prof. Kan-Lin Hsiung's Control course;

## 2.4. Chile



## 2.5. Duckietown High School



## CHAPTER 3

# First steps

### 3.1. How to get started

If you are an instructor, please jump to [Section 3.2](#).

If you are a self-guided learner, please jump to [Section 3.3](#).

If you are a company, and interested in working with Duckietown, please jump to [Section 3.4](#).

### 3.2. Duckietown for instructors

### 3.3. Duckietown for self-guided learners

### 3.4. Introduction for companies

### 3.5. How to keep in touch

### 3.6. How to contribute

### 3.7. Frequently Asked Questions

#### 1) General questions

*Q: What is Duckietown?*

Duckietown is a low-cost educational and research platform.

*Q: Is Duckietown free to use?*

Yes. All materials are released according to an open source license.

*Q: Is everything ready?*

Not quite! Please [sign up to our mailing list](#) to get notified when things are a bit more ready.

*Q: How can I start?*

See the section [First Steps](#).

*Q: How can I help?*

If you would like to help actively, please email [duckietown@mit.edu](mailto:duckietown@mit.edu).

#### 2) FAQ by students / independent learners

*Q: I want to build my own Duckiebot. How do I get started?*

3) FAQ by instructors

---

*Q: How large a class can it be? I teach large classes.*

*Q: What is the budget for the robot?*

*Q: I want to teach a Duckietown class. How do I get started?*

Please get in touch with us at [duckietown@mit.edu](mailto:duckietown@mit.edu). We will be happy to get you started and sign you up to the Duckietown instructors mailing list.

*Q: Why the duckies?*

Compared to other educational robotics projects, the presence of the duckies is what makes this project stand out. Why the duckies?

We want to present robotics in an accessible and friendly way.

## CHAPTER 4

# Accounts

### 4.1. Complete list of accounts

Currently, Duckietown has the following accounts:

- Github: for source code, and issue tracking;
- Slack: a forum for wide communication;
- Twist: to be used for instructors coordination;
- Google Drive: to be used for instructors coordination, maintaining TODOs, etc;
- Dropbox Folders (part of Andrea's personal accounts): to be abandoned;
- Vimeo, for storing the videos;
- The `duckietown-teaching` mailing list, for low-rate communication with instructors;
- We also have a list of addresses, of people signed up on the website, that we didn't use yet;
- The Facebook page.

### 4.2. For other contributors

If you are an international contributor:

- Sign up on Slack, to keep up with the project.
- (optional) Get Github permissions if you do frequent updates to the repositories.

PART 2

# Duckumentation documentation

..

## CHAPTER 5

# Contributing to the documentation

### 5.1. Where the documentation is

All the documentation is in the repository `duckietown/duckuments`.

The documentation is written as a series of small files in Markdown format.

It is then processed by a series of scripts to create this output:

- a publication-quality PDF;
- an online HTML version, split in multiple pages and with comments boxes.

### 5.2. Editing links

The simplest way to contribute to the documentation is to click any of the “✎” icons next to the headers.

They link to the “edit” page in Github. There, one can make and commit the edits in only a few seconds.

### 5.3. Comments

In the multiple-page version, each page also includes a comment box powered by a service called Disqus. This provides a way for people to write comments with a very low barrier. (We would periodically remove the comments.)

### 5.4. Installing the documentation system

In the following, we are going to assume that the documentation system is installed in `~/duckuments`. However, it can be installed anywhere.

We are also going to assume that you have setup a Github account with working public keys.

#### 1) Dependencies (Ubuntu 16.04)

---

On Ubuntu 16.04, these are the dependencies to install:

```
$ sudo apt install libxml2-dev libxslt1-dev
$ sudo apt install libffi6 libffi-dev
$ sudo apt install python-dev python-numpy python-matplotlib
$ sudo apt install virtualenv
$ sudo apt install bibtex2html
```

#### 2) Download the duckuments repo

---

Download the `duckietown/duckuments` repository in that directory:

```
$ git clone git@github.com:duckietown/duckuments ~/duckuments
```

### 3) Setup the virtual environment

Next, we will create a virtual environment using inside the `~/duckuments` directory. Change into that directory:

```
$ cd ~/duckuments
```

Create the virtual environment using `virtualenv`:

```
$ virtualenv --system-site-packages deploy
```

Other distributions: In other distributions you might need to use `venv` instead of `virtualenv`.

Activate the virtual environment:

```
$ source ~/duckuments/deploy/bin/activate
```

### 4) Setup the `mcdp` external repository

Make sure you are in the directory:

```
$ cd ~/duckuments
```

Clone the `mcdp` external repository, with the branch `duckuments`.

```
$ git clone -b duckuments git@github.com:AndreaCensi/mcdp
```

Install it and its dependencies:

```
$ cd ~/duckuments/mcdp  
$ python setup.py develop
```

**Note:** If you get a permission error here, it means you have not properly activated the virtual environment.

Other distributions: If you are not on Ubuntu 16, depending on your system, you might need to install these other dependencies:

```
$ pip install numpy matplotlib
```

## 5.5. Compiling the documentation

### Check before you continue

Make sure you have deployed and activated the virtual environment. You can check this by checking which `python` is active:

```
$ which python  
/home/user/duckuments/deploy/bin/python
```

Then:

```
$ cd ~/duckuments
$ make duckuments-dist
```

This creates the directory `duckuments-dist`, which contains another checked out copy of the repository, but with the branch `gh-pages`, which is the branch that is published by Github using the “Github Pages” mechanism.

### Check before you continue

At this point, please make sure that you have these two `.git` folders:

```
~/duckuments/.git
~/duckuments/duckuments-dist/.git
```

To compile the docs, run `make clean compile`:

```
$ make clean compile
```

To see the result, open the file

```
./duckuments-dist/master/duckiebook/index.html
```

### 1) Incremental compilation

If you want to do incremental compilation, you can omit the `clean` and just use:

```
$ make compile
```

This will be faster. However, sometimes it might get confused. At that point, do `make clean`.

## 5.6. Troubleshooting compilation

### **Symptom:** “Invalid XML”

**Resolution:** “Markdown” doesn’t mean that you can put anything in a file. Except for the code blocks, it must be valid XML. For example, if you use “`>`” and “`<`” without quoting, it will likely cause a compile error.

### **Symptom:** “Tabs are evil”

**Resolution:** Do not use tab characters. The error message in this case is quite helpful in telling you exactly where the tabs are.

### **Symptom:** The error message contains `ValueError: Suspicious math fragment 'KEYMATHS000END-KEY'`

**Resolution:** You probably have forgotten to indent a command line by at least 4 spaces. The dollar in the command line is now being confused for a math formula.

## 5.7. The workflow to edit documentation.

This is the workflow:

1. Edit the Markdown in the `master` branch of the `duckuments` repository.
2. Run `make compile` to make sure it compiles.
3. Commit the Markdown and push on the `master` branch.

Done. A bot will redo the compilation and push the changes in the `gh-pages` branch.

Step 2 is there so you know that the bot will not encounter errors.

## 5.8. \*Deploying the documentation

**Note:** This part is now done by a bot, so you don't need to do it manually.

To deploy the documentation, jump into the `DUCKUMENTS/duckuments-dist` directory.

Run the command `git branch`. If the output does not say that you are on the branch `gh-pages`, then one of the steps before was done incorrectly.

```
$ cd $DUCKUMENTS/duckuments-dist  
$ git branch  
...  
* gh-pages  
...
```

Now, after triple checking that you are in the `gh-pages` branch, you can use `git status` to see the files that were added or modified, and simply use `git add`, `git commit` and `git push` to push the files to Github.

## 5.9. \*Compiling the PDF version

**Note:** The dependencies below are harder to install. If you don't manage to do it, then you only lose the ability to compile the PDF. You can do `make compile` to compile the HTML version, but you cannot do `make compile-pdf`.

### 1) Installing node.js

Ensure the latest version (>6) of `node.js` is installed.

Run:

```
$ nodejs --version  
6.xx
```

If the version is 4 or less, remove `nodejs`:

```
$ sudo apt remove nodejs
```

Install `nodejs` using the instructions at this page.

Next, install the necessary Javascript libraries using `npm`:

```
$ cd $DUCKUMENTS  
$ npm install MathJax-node jsdom@9.3 less
```

## 2) Troubleshooting node.js installation problems

The only pain point in the installation procedure has been the installation of nodejs packages using npm. For some reason, they cannot be installed globally (`npm install -g`).

Do not use sudo for installation. It will cause problems.

If you use sudo, you probably have to delete a bunch of directories, such as: RBR0OT/node\_modules, ~/.npm, and ~/.node\_modules, if they exist.

## 3) Installing Prince

Install PrinceXML from [this page](#).

## 4) Installing fonts

Download STIX fonts from [this site](#).

Unzip and copy the ttf to ~/.fonts:

```
$ cp -R STIXv2.0.0 ~/.fonts
```

and then rebuild the font cache using:

```
$ fc-cache -fv
```

## 5) Compiling the PDF

To compile the PDF, use:

```
$ make compile-pdf
```

This creates the file:

```
./duckuments-dist/master/duckiebook.pdf
```

# CHAPTER 6

## Features of the documentation writing system

The Duckiebook is written in a Markdown dialect. A subset of LaTeX is supported. There are also some additional features that make it possible to create publication-worthy materials.

### 6.1. Markdown

The Duckiebook is written in a Markdown dialect.

→ [A tutorial on Markdown.](#)

### 6.2. Embedded LaTeX

You can use *LaTeX* math, environment, and references. For example, take a look at

$$x^2 = \int_0^t f(\tau) d\tau$$

or refer to [Proposition 1](#).

**Proposition 1.** (Proposition example) This is an example proposition:  $2x = x + x$ .

The above was written as in [Listing 1](#).

You can use `\LaTeX` math, environment, and references.  
For example, take a look at

```
\[
  x^2 = \int_0^t f(\tau) \text{d}\tau
\]
```

or refer to `[](#prop:example)`.

```
\begin{proposition}[Proposition example]\label{prop:example}
This is an example proposition: $2x = x + x$.
\end{proposition}
```

Listing 1. Use of LaTeX code.

### 6.3. LaTeX symbols

The LaTeX symbols definitions are in a file called [docs/symbols.tex](#).

Put all definitions there; if they are centralized it is easier to check that they are coherent.

### 6.4. Variables in command lines and command output

Use the syntax “`![name]`” for describing the variables in the code.

**Example .**

For example, to obtain:

```
$ ssh robot name.local
```

Use the following:

For example, to obtain:

```
$ ssh ! [robot name].local
```

Make sure to quote (with 4 spaces) all command lines. Otherwise, the dollar symbol confuses the LaTeX interpreter.

## 6.5. Character escapes

Use the string “`&#36;`” to write the dollar symbol “\$”, otherwise it gets confused with LaTeX math materials. Also notice that you should probably use “USD” to refer to U.S. dollars.

Other symbols to escape are shown in [Table 1](#).

TABLE 1. SYMBOLS TO ESCAPE

use <code>&amp;#36;</code>	instead of \$
use <code>&amp;#96;</code>	instead of `
use <code>&amp;#lt;</code>	instead of <
use <code>&amp;gt;</code>	instead of >

## 6.6. Keyboard keys

Use the `kbd` element for keystrokes.

**Example .**

For example, to obtain:

Press `a` then `Ctrl-C`.

use the following:

Press `<kbd>a</kbd>` then `<kbd>Ctrl</kbd>-<kbd>C</kbd>`.

## 6.7. Figures

For any element, adding an attribute called `figure-id` with value `fig:figure ID` or `tab:table ID` will create a figure that wraps the element.

For example:

```
<div figure-id="fig:figure ID'>
    figure content
</div>
```

It will create HMTL of the form:

```
<div id='fig:code-wrap' class='generated-figure-wrap'>
  <figure id='fig:figure ID' class='generated-figure'>
    <div>
      figure content
    </div>
  </figure>
</div>
```

To add a caption, add an attribute `figure-caption`:

```
<div figure-id="fig:figure ID" figure-caption="This is my caption">
  figure content
</div>
```

Alternatively, you can put anywhere an element `figcaption` with ID `fig:figure ID:caption`:

```
<element figure-id="fig:figure ID">
  figure content
</element>

<figcaption id='fig:figure ID:caption'>
  This the caption figure.
</figcaption>
```

To refer to the figure, use an empty link:

```
Please see [](#fig:figure ID).
```

The code will put a reference to “Figure XX”.

## 6.8. Subfigures

You can also create subfigures, using the following syntax.

```
<div figure-id="fig:big">
  <figcaption>Caption of big figure</figcaption>

  <div figure-id="subfig:first">
    <figcaption>Caption 1</figcaption>
    <p>Content of first subfig</p>
  </div>

  <div figure-id="subfig:second">
    <figcaption>Caption 2</figcaption>
    <p>Content of second subfig</p>
  </div>
</div>
```

Content of first subfig

(a) Caption 1

Content of second subfig

(b) Caption 2

Figure 9. Caption of big figure

## 6.9. Shortcut for tables

The shortcuts `col2`, `col3`, `col4`, `col5` are expanded in tables with 2, 3, 4 or 5 columns.

The following code:

```
<col2 figure-id="tab:mytable" figure-caption="My table">
  <span>A</span>
  <span>B</span>
  <span>C</span>
  <span>D</span>
</col2>
```

gives the following result:

TABLE 2. MY TABLE

A	B
C	D

### 1) `labels-row1` and `labels-row1`

Use the classes `labels-row1` and `labels-row1` to make pretty tables like the following.

`labels-row1`: the first row is the headers.

`labels-col1`: the first column is the headers.

TABLE 3. USING CLASS="LABELS-COL1"

header A	B	C	1
header D	E	F	2
header G	H	I	3

TABLE 4. USING CLASS="LABELS-ROW1"

header A	header B	header C
D	E	F
G	H	I
1	2	3

## 6.10. Linking to documentation from inside and outside the documentation

### 1) Establishing names of headers

You give IDs to headers using the format:

```
### header title {#topic ID}
```

For example, for this subsection, we have used:

```
### Establishing names of headers {#establishing}
```

With this, we have given this header the ID “establishing”.

## 2) Linking from the documentation to the documentation

---

You can use the syntax:

```
[](#topic ID)
```

to refer to the header.

You can also use some slightly more complex syntax that also allows to link to only the name, only the number or both (Table 5).

TABLE 5. SYNTAX FOR REFERRING TO SECTIONS.

See [](#establishing).

See Subsection 6.10.1

See <a class="only\_name" href="#establishing"></a>.

See Establishing names of headers.

See <a class="only\_number" href="#establishing"></a>.

See 6.10.1.

See <a class="number\_name" href="#establishing"></a>.

See Subsection 6.10.1 - Establishing names of headers.

## 3) Linking to the documentation from outside the documentation

---

You are encouraged to put links to the documentation from the code or scripts.

To do so, use links of the form:

```
http://purl.org/dth/topic ID
```

Here “dth” stands for “Duckietown Help”. This link will get redirected to the corresponding document on the website.

For example, you might have a script whose output is:

```
$ rosrun mypackage myscript
Error. I cannot find the scuderia file.
See: http://purl.org/dth/scuderia
```

When the user clicks on the link, they will be redirected to Section 105.2.

## 6.11. Embedding videos

It is possible to embed Vimeo videos in the documentation.

**Note:** Do not upload the videos to your personal Vimeo account; they must all be posted to the Duckietown Engineering account.

This is the syntax:

```
<dtvideo src="vimeo:vimeo ID"/>
```

For example, this code:

```
<div figure-id="fig:example-embed">
  <figcaption>Cool Duckietown by night</figcaption>
  <dtvideo src="vimeo:152825632"/>
</div>
```

produces this result:



Figure 10. Cool Duckietown by night

Depending on the output media, the result will change:

- On the online book, the result is that a player is embedded.
- On the e-book version, the result is that a thumbnail is produced, with a link to the video;
- On the dead-tree version, a thumbnail is produced with a QR code linking to the video (TODO).

## 6.12. Bibliography



You need to have installed `bibtex2html`.

The system supports Bibtex files.

Place `*.bib` files anywhere in the directory.

Then you can refer to them using the syntax:

```
[](#bib:bibtex ID)
```

For example:

```
Please see [](#bib:siciliano07handbook).
```

Will result in:

Please see [3].

# CHAPTER 7

## Documentation style guide

This chapter describes the conventions for writing the technical documentation.

### 7.1. General guidelines for technical writing

The following holds for all technical writing.

- The documentation is written in correct English.
- Do not say “should” when you mean “must”. “Must” and “should” have precise meanings and they are not interchangeable. These meanings are explained [in this document](#).
- “Please” is unnecessary in technical documentation.
  - ✗ “Please remove the SD card.”
  - ✓ “Remove the SD card”.
- Do not use colloquialisms or abbreviations.
  - ✗ “The pwd is ubuntu.”
  - ✓ “The password is ubuntu.”
  - ✗ “To create a ROS pkg...”
  - ✓ “To create a ROS package...”
- Python is capitalized when used as a name.
  - ✗ “If you are using python...”
  - ✓ “If you are using Python...”
- Do not use emojis.
- Do not use ALL CAPS.
- Make infrequent use of bold statements.
- Do not use exclamation points.

### 7.2. Style guide for the Duckietown documentation

- It's ok to use “it's” instead of “it is”, “can't” instead of “cannot”, etc.
- All the filenames and commands must be enclosed in code blocks using Markdown backticks.
  - ✗ “Edit the `~/.ssh/config` file using vi.”
  - ✓ “Edit the `~/.ssh/config` file using `vi`.”
- `Ctrl`-`C`, ssh etc. are not verbs.
  - ✗ “`Ctrl`-`C` from the command line”.
  - ✓ “Use `Ctrl`-`C` from the command line”.
- Subtle humor and puns about duckies are encouraged.

### 7.3. Writing command lines

Use either “`laptop`” or “`duckiebot`” (not capitalized, as a hostname) as the prefix for the command line.

For example, for a command that is supposed to run on the laptop, use:

```
laptop $ cd ~/duckietown
```

It will become:

 \$ cd ~/duckietown

For a command that must run on the Duckiebot, use:

```
duckiebot $ cd ~/duckietown
```

It will become:

 \$ cd ~/duckietown

If the command is supposed to be run on both, omit the hostname:

```
$ cd ~/duckietown
```

## 7.4. Frequently misspelled words

- “Duckiebot” is always capitalized.
- Use “Raspberry Pi”, not “PI”, “raspi”, etc.
- These are other words frequently misspelled: 5 GHz WiFi

## 7.5. Other conventions

When the user must edit a file, just say: “edit `/this/file`”.

Writing down the command line for editing, like the following:

```
$ vi /this/file
```

is too much detail.

(If people need to be told how to edit a file, Duckietown is too advanced for them.)

## 7.6. Troubleshooting sections

Write the documentation as if every step succeeds.

Then, at the end, make a “Troubleshooting” section.

Organize the troubleshooting section as a list of symptom/resolution.

The following is an example of a troubleshooting section.

### 1) Troubleshooting

**| Symptom:** This strange thing happens.

**Resolution:** Maybe the camera is not inserted correctly. Remove and reconnect.

| **Symptom:** This other strange thing happens.

**Resolution:** Maybe the plumbus is not working correctly. Try reformatting the plumbus.

## CHAPTER 8

# Knowledge graph



**Note:** This chapter describes something that is not implemented yet.

### 8.1. Formalization



#### 1) Atoms



**Definition 1.** (Atom) An *atom* is a concrete resource (text, video) that is the smallest unit that is individually addressable. It is indivisible.

Each atom as a type, as follows:

```

text
text/theory
text/setup
text/demo
text/exercise
text/reference
text/instructor-guide
text/quiz
video
video/lecture
video/instructable
video/screencast
video/demo

```

#### 2) Semantic graph of atoms



Atoms form a directed graph, called “semantic graph”.

Each node is an atom.

The graph has four different types of edges:

- “Requires” edges describe a strong dependency: “You need to have done this. Otherwise it will not work.”
- “Recommended” edges describe a weaker dependency; it is not strictly necessary to have done that other thing, but it will significantly improve the result of this.
- “Reference” edges describe background information. “If you don’t know / don’t remember, you might want to see this”
- “See also” edges describe interesting materials for the interested reader. Completely optional; it will not impact the result of the current procedure.

#### 3) Modules



A “module” is an abstraction from the point of view of the teacher.

**Definition 2.** (Module) A *module* is a directed graph, where the nodes are either atoms or other modules, and the edges can be of the four types described in [Subsection 8.1.2](#).

Because modules can contain other modules, they allow to describe hierarchical contents. For example, a class module is a module that contains other modules; a “degree” is a module that contains “class” modules, etc.

Modules can overlap. For example, a “Basic Object Detection” and an “Advanced Object Detection” module might have a few atoms in common.

## 8.2. Atoms properties

Each atom has the following properties:

- An ID (alphanumeric + - and ‘\_’). The ID is used for cross-referencing. It is the same in all languages.
- A type, as above.

There might be different versions of each atom. This is used primarily for dealing with translations of texts, different representations of the same image, Powerpoint vs Keynote, etc.

A version is a tuple of attributes.

The attributes are:

- Language: A language code, such as en-US (default), zh-CN, etc.
- Mime type: a MIME type.

Each atom version has:

- A status value: one of draft, beta, ready, to-update (Table 6).
- A human-readable title.
- A human-readable summary (1 short paragraph).

TABLE 6. STATUS CODES

draft	We just started working on it, and it is not ready for public consumption.
beta	Early reviewers should look at it now.
ready	The document is ready for everybody.
to-up-date	A new pass is needed on this document, because it is not up to date anymore.

## 8.3. Markdown format for text-like atoms

For the text-like resources, they are described in Markdown files.

The name of the file does not matter.

All files are encoded in UTF-8.

Each file starts with a H1 header. The contents is the title.

The header has the following attributes:

1. The ID. ({#ID})
2. The language is given by an attribute lang ({lang=en-US}).
3. The type is given by an attribute type ({type=demo}).
4. The status is given by an attribute status ({status=draft}).

Here is an example of a header with all the attributes:

```
# Odometry calibration {#odometry-calibration lang=en-US type='text/theory' status=ready}

This first paragraph will be used as the "summary" for this text.
```

Listing 2. `calibration.en.md`

And this is how the Italian translation would look like:

```
# Calibrazione dell'odometria {#odometry-calibration lang=it type='text/theory' status=draft}

Questo paragrafo sarà usato come un sommario del testo.
```

Listing 3. `calibration.it.md`

## 8.4. How to describe the semantic graphs of atoms



In the text, you describe the semantic graph using tags and IDs.

In Markdown, you can give IDs to sections using the syntax:

```
# Setup step 1 {#setup-step1}

This is the first setup step.
```

Then, when you write the second step, you can add a semantic edge using the following.

```
# Setup step 2 {#setup-step2}

This is the second setup step.

Requires: You have completed the first step in [](#setup-step1).
```

The following table describes the syntax for the different types of semantic links:

TABLE 7. SEMANTIC LINKS

Requires	Requires: You need to have done [](#setup-step).
Recommended	Recommended: It is better if you have setup Wifi as in [](#setup-wifi).
Reference	Reference: For more information about <code>rostopic</code> , see [](#rostopic).
See also	See also: If you are interested in feature detection, you might want to learn about [SIFT](#SIFT).

## 8.5. How to describe modules



PART 3

## Operation manual - Duckiebot



## CHAPTER 9

# Duckiebot configurations

Here we define the different Duckiebot hardware configurations, and describe their functionalities. This is a good starting point if you are wondering what parts you should purchase to get started. Once you have decided which configuration best suits your needs, you can proceed to purchasing the components for a **C0+wd** or **C1** Duckiebot.

### 9.1. Configuration list

- Configuration **C0**: Only camera and motors.
- Configuration **C0+w**: **C0**, plus an additional wireless adapter.
- Configuration **C0+j**: **C0**, plus an additional wireless joypad for remote control.
- Configuration **C0+d**: **C0**, plus an additional USB drive.
- Configuration **C1**: **C0+wd**, plus LEDs and bumpers.

### 9.2. Configuration functionality

#### 1) C0

This is the minimal configuration for a Duckiebot. It will be able to navigate a Duckietown, but not communicate with other Duckiebots. It is the configuration of choice for tight budgets or when operation of a single Duckiebot is more of interest than fleet behaviours.

#### 2) C0+w

In this configuration, the minimal **C0** version is augmented with a 5 GHz wireless adapter, which drastically improves connectivity. This feature is particularly useful in connection saturated environments, e.g., classrooms.

#### 3) C0+j

In this configuration, the minimal **C0** version is augmented with a 2.4 GHz wireless joypad, used for manual remote control of the Duckiebot. It is particularly useful for getting the Duckiebot out of tight spots or letting younger ones have a drive.

#### 4) C0+d

In this configuration, the minimal **C0** version is augmented with a USB flash hard drive. This drive is convenient for storing videos (logs) as it provides both extra capacity and faster data transfer rates than the microSD card in the Raspberry Pi. Moreover, it is easy to unplug it from the Duckiebot at the end of the day and bring it over to a computer for downloading and analyzing stored data.

#### 5) C0+wd

The upgrades of the minimal **C0** version are not mutually exclusive. We will refer to

`C0+wjd` when any or all of the add-ons to the minimal version are considered.

6) C1

---

This is the ultimate Duckiebot configuration and it includes the necessary hardware for controlling and placing 5 RGB LEDs on the Duckiebot. It is the necessary configuration to enable communication between Duckiebots, hence fleet behaviours (e.g., negotiating crossing an intersection).

## CHAPTER 10

# Acquiring the parts for the Duckiebot C0



The trip begins with acquiring the parts. Here, we provide a link to all bits and pieces that are needed to build a Duckiebot, along with their price tag. If you are wondering what is the difference between different Duckiebot configurations, read [this](#).

In general, keep in mind that:

- The links might expire, or the prices might vary.
- Shipping times and fees vary, and are not included in the prices shown below.
- Substitutions are OK for the mechanical components, and not OK for all the electronics, unless you are OK in writing some software.
- Buying the parts for more than one Duckiebot makes each one cheaper than buying only one.

**Requires:** - Cost: USD 169 + Shipping Fees (minimal configuration C0) - Time: 15 days (average shipping for cheapest choice of components)

**Results:** - A kit of parts ready to be assembled in a C0 or C0+wjd configuration.

**Next Steps:** - After receiving these components, you are ready to do some [soldering](#) before [assembling](#) your C0 or C0+wjd Duckiebot.

### 10.1. Bill of materials



**TABLE 8. BILL OF MATERIALS**

Chassis	USD 20
Camera with 160-FOV Fisheye Lens	USD 22
Camera Mount	USD 8.50
300mm Camera Cable	USD 2
Raspberry Pi 3 - Model B	USD 35
Heat Sinks	USD 5
Power supply	USD 7.50
16 GB Class 10 MicroSD Card	USD 20
Mirco SD card reader	USD 6
Stepper Motor HAT	USD 22.50
Stacking Header	USD 2.50/piece
Battery	USD 20
16 Nylon Standoffs (M2.5 12mm F 6mm M)	USD 0.05/piece
4 Nylon Hex Nuts (M2.5)	USD 0.02/piece
4 Nylon Screws (M2.5x10)	USD 0.05/piece
2 Zip Ties (300x5mm)	USD 9
Wireless Adapter (5 GHz) (C0+w)	USD 20
Joypad (C0+j)	USD 10.50
Tiny 32GB USB Flash Drive (C0+d)	USD 12.50
Total for C0 configuration	USD 169
Total for C0+w configuration	USD 189
Total for C0+j configuration	USD 179.50
Total for C0+d configuration	USD 171.50
Total for C0+wjd configuration	USD 212

### 10.2. Chassis



We selected the Magician Chassis as the basic chassis for the robot ([Figure 11](#)). We chose it because it has a double-decker configuration, and so we can put the battery in the lower part. The chassis pack includes the motors and wheels as well as the structural part. The price for this in the US is about USD 15-30.



Figure 11. The Magician Chassis

### 10.3. Raspberry Pi 3 - Model B

The Raspberry Pi is the central computer of the Duckiebot. Duckiebots use Model B ([Figure 12](#)) (A1.2GHz 64-bit quad-core ARMv8 CPU, 1GB RAM), a small but powerful computer.



Figure 12. The Raspberry Pi 3 Model B

The price for this in the US is about USD 35.

#### 1) Power Supply

We want a hard-wired power source (5VDC, 2.4A, Micro USB) to supply the Raspberry Pi ([Figure 13](#)).



Figure 13. The Power Supply

The price for this in the US is about USD 5-10.

## 2) Heat Sinks

---

The Raspberry Pi will heat up significantly during use. It is warmly recommended to add heat sinks, as in [Figure 14](#). Since we will be stacking HATs on top of the Raspberry Pi with 15 mm standoffs, the maximum height of the heat sinks should be well below 15 mm. The chip dimensions are 15x15mm and 10x10mm.



Figure 14. The Heat Sinks

## 3) Class 10 MicroSD Card

---

The MicroSD card ([Figure 15](#)) is the hard disk of the Raspberry Pi. 16 Gigabytes of capacity are sufficient for the system image.



Figure 15. The MicroSD card

## 4) Mirco SD card reader

---

A microSD card reader ([Figure 16](#)) is useful to copy the system image to a Duckiebot from a computer to the Raspberry Pi microSD card, when the computer does not have a native SD card slot.



Figure 16. The Mirco SD card reader

## 10.4. Camera

The Camera is the main sensor of the Duckiebot. All versions equip a 5 Mega Pixels 1080p camera with wide field of view ( $160^\circ$ ) fisheye lens (Figure 17).



Figure 17. The Camera with Fisheye Lens

### 1) Camera Mount

The camera mount (Figure 18) serves to keep the camera looking forward at the right angle to the road (looking slightly down). The front cover is not essential.

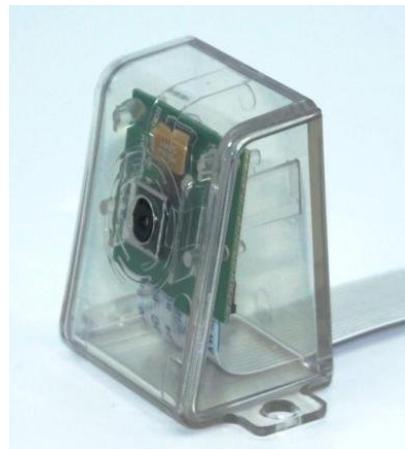


Figure 18. The Camera Mount

## 2) 300mm Camera Cable

A longer (300 mm) camera cable [Figure 19](#) make assembling the Duckiebot easier, allowing for more freedom in the relative positioning of camera and computational stack.

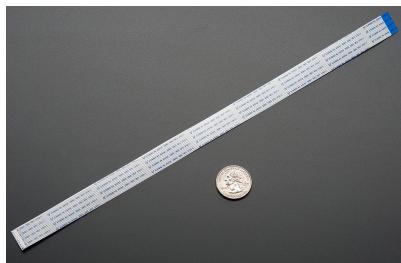


Figure 19. A 300 mm camera cable for the Raspberry Pi

## 10.5. DC Stepper Motor HAT

We use the DC Stepper motor HAT ([Figure 26](#)) to control the DC motors that drive the wheels. This item will require [soldering](#) to be functional.

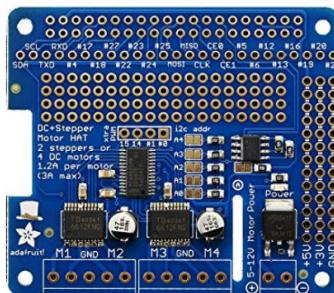


Figure 20. The Stepper Motor HAT

## 1) Stacking Headers

We use a long 20x2 stacking header ([Figure 21](#)) to connect the Raspberry Pi with the DC Stepper Motor HAT. This item will require [soldering](#) to be functional.



Figure 21. The Stacking Headers

## 10.6. Battery

The battery ([Figure 22](#)) provides power to the Duckiebot.

We choose this battery because it has a good combination of size (to fit in the lower deck of the Magician Chassis), high output amperage (2.4A and 2.1A at 5V DC) over two USB outputs, a good capacity (10400 mAh) at an affordable price (USD 20).



Figure 22. The Battery

## 10.7. Standoffs, Nuts and Screws

We use non electrically conductive standoffs (M2.5 12mm F 6mm M), nuts (M2.5), and screws (M2.5x10mm) to hold the Raspberry Pi to the chassis and the HATs stacked on top of the Raspberry Pi.

The Duckiebot requires 8 standoffs, 4 nuts and 4 screws.

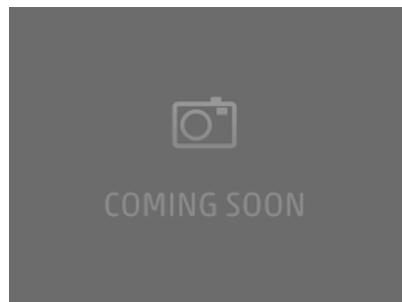


Figure 23. Standoffs, Nuts and Screws

## 10.8. Zip Tie

Two 300x5mm zip ties are needed to keep the battery at the lower deck from moving around.



Figure 24. The zip ties

## 10.9. Configuration C0-w

### 1) Wireless Adapter (5 GHz)

The Edimax AC1200 EW-7822ULC 5 GHz WiFi adapter ([Figure 25](#)) boosts the connectivity of the Duckiebot, especially useful in busy Duckietowns (e.g., classroom).



Figure 25. The Edimax AC1200 EW-7822ULC wifi adapter

## 10.10. Configuration C0-j

### 1) Joypad

The joypad is used to manually remote control the Duckiebot. Any 2.4 GHz wireless controller (with a *tiny* USB dongle) will do.

The model linked in the table ([Figure 26](#)) does not include batteries (required: 2 AA 1.5V).



Figure 26. A Wireless Joypad

### 10.11. Configuration C0-d

#### 1) Tiny 32GB USB Flash Drive

In configuration C0-d, the Duckiebot is equipped with a “external” hard drive (Figure 27). This add-on is very convenient to store logs during experiments and later port them to a workstation for analysis. It provides storage capacity and faster data transfer than the MicroSD card.



Figure 27. The Tiny 32GB USB Flash Drive

## CHAPTER 11

# Acquiring the parts for the Duckiebot C1

Upgrading your `c0+wjd` configuration to `c1` starts here, with purchasing the necessary components. We provide a link to all bits and pieces that are needed to build a `c1` Duckiebot, along with their price tag. If you are wondering what is the difference between different Duckiebot configurations, read [Chapter 9](#).

In general, keep in mind that:

- The links might expire, or the prices might vary.
- Shipping times and fees vary, and are not included in the prices shown below.
- Buying the parts for more than one Duckiebot makes each one cheaper than buying only one.
- A few components in this configuration are custom designed, and might be trickier to obtain.

Requires: - A Duckiebot in `c0+wjd` configuration. - Cost: USD 69 + Bumpers manufacturing solution - Time: 21 Days (LED board manufacturing and shipping time)

Results: - A kit of parts ready to be assembled in a `c1` configuration Duckiebot.

Next Steps: - After receiving these components, you are ready to do some [soldering](#) before [assembling](#) your `c1` Duckiebot.

### 11.1. Bill of materials

TABLE 9. BILL OF MATERIALS

20 Female-Female Jumper Wires (300mm)	USD 8
Male-Male Jumper Wire (150mm)	USD 1.95
LEDs	USD 10
LED HAT	USD 28.20 for 3 pieces
PWM/Servo HAT	USD 17.50
Bumpers	TBD (custom made)
40 pin female header	USD 1.50
5 4 pin female header	USD 0.60/piece
2 16 pin male header	USD 0.61/piece
12 pin male header	USD 0.48/piece
3 pin male header	USD 0.10/piece
2 pin female shunt jumper	USD 2/piece
5 200 Ohm resistors	USD 0.10/piece
10 130 Ohm resistors	USD 0.10/piece
Total for <code>c0+wjd</code> configuration	USD 212
Total for <code>c1</code> components	USD 69 + Bumpers
Total for <code>c1</code> configuration	USD 281+Bumpers

### 11.2. LEDs

The Duckiebot is equipped with 5 RGB LEDs ([Figure 28](#)). LEDs can be used to signal

to other Duckiebots, or just make *fancy* patterns.

The pack of LEDs linked in the table above holds 10 LEDs, enough for two Duckiebots.

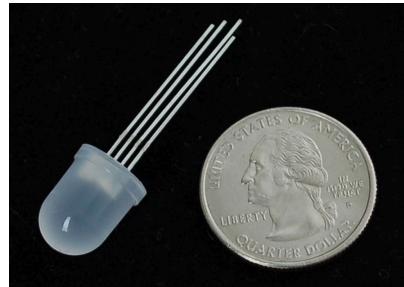


Figure 28. The RGB LEDs

### 1) LED HAT

The LED HAT ([Figure 29](#)) provides an interface for our RGB LEDs and the computational stack. This board is a daughterboard for the Adafruit 16-Channel PWM/Servo HAT, and enables connection with additional gadgets such as [ADS1015 12 Bit 4 Channel ADC](#), [Monochrome 128x32 I2C OLED graphic display](#), and [Adafruit 9-DOF IMU Breakout - L3GD20H+LSM303](#). This item will require [soldering](#).

This board is custom designed and can only be ordered in minimum runs of 3 pieces. The price scales down quickly with quantity, and lead times may be significant, so it is better to buy these boards in bulk.

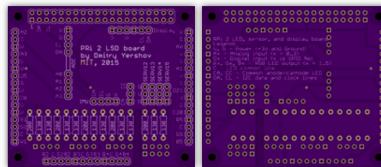


Figure 29. The LED HAT

### 2) PWM/Servo HAT

The PWM/Servo HAT ([Figure 30](#)) mates to the LED HAT and provides the signals to control the LEDs, without taking computational resources away from the Raspberry Pi itself. This item will require [soldering](#).



Figure 30. The PWM-Servo HAT

### 3) Male-Male Jumper Wires

The Duckiebot needs one male-male jumper wire ([Figure 31](#)) to power the DC Stepper

Motor HAT from the PWM/Servo HAT.

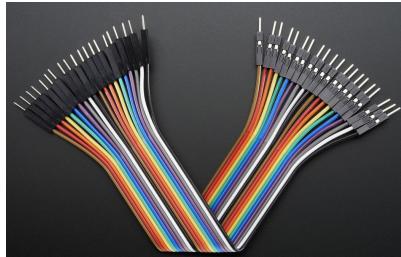


Figure 31. Premier Male-Male Jumper Wires

#### 4) Female-Female Jumper Wires

20 Female-Female Jumper Wires (Figure 32) are necessary to connect 5 LEDs to the LED HAT.

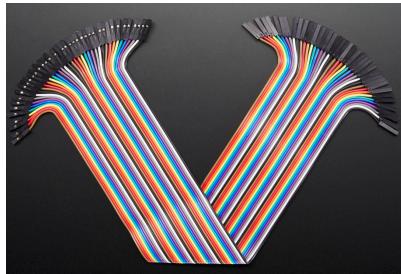


Figure 32. Premier Female-Female Jumper Wires

### 11.3. Bumpers

These bumpers are designed to keep the LEDs in place and are therefore used only in configuration C1. They are custom designed parts, so they must be produced and cannot be bought. We used laser cutting facilities. Our design files are available [here].

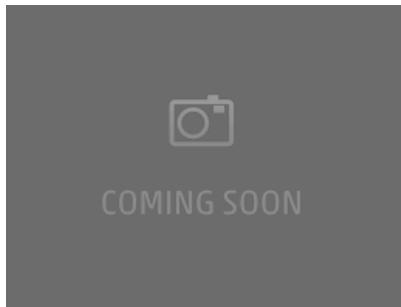


Figure 33. The Bumpers

### 11.4. Headers, resistors and jumper

Upgrading C0+wjd to C1 requires several electrical bits: 5 of 4 pin female header, 2 of 16 pin male headers, 1 of 12 pin male header, 1 of 3 pin male header, 1 of 2 pin female shunt jumper, 5 of 200 Ohm resistors and finally 10 of 130 Ohm resistors.

These items require [soldering](#).



Figure 34. The Headers

W

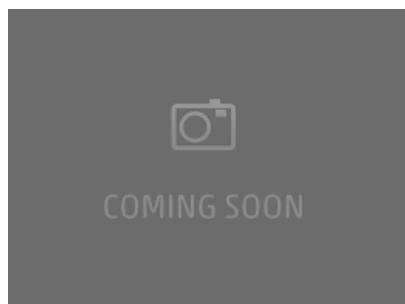


Figure 35. The Resistors

## CHAPTER 12

# Soldering boards for C0



Assigned to: Shiyeng

Resources necessary:

Requires: - Duckiebot `C0+wjd` parts. The acquisition process is explained in [Chapter 10](#). The configurations are described in [Chapter 9](#).

Requires: - Time: ??? minutes

Results:

- ...

# CHAPTER 13

## Soldering boards for C1



Assigned to: Shiying

Resources necessary:

**Requires:** - Duckiebot C1 parts. The acquisition process is explained in [Chapter 11](#).  
The configurations are described in [Chapter 9](#).

**Requires:** - Time: ??? minutes

Results:

- ...

## CHAPTER 14

# Assembling the Duckiebot C0



Assigned to: Shiying

Requires: - Duckiebot C0+wd parts. The acquisition process is explained in [Chapter 10](#).

- Having soldered the C0+wd parts. The soldering process is explained in [Chapter 12](#).
- Time: about ??? minutes.

Results:

- An assembled Duckiebot in configuration C0+wd.

Shiying: here will be the instruction about assembling the Duckiebot.

# CHAPTER 15

## Assembling the Duckiebot C1



Assigned to: Shiying

Requires: Duckiebot C1 parts. The acquisition process is explained in [Chapter 11](#).

Requires: Soldering C1 parts. The soldering process is explained in [Chapter 13](#).

Requires: Time: about ??? minutes.

Results:

- An assembled Duckiebot in configuration C1.

Shiying: here will be the instruction about assembling the Duckiebot.

## CHAPTER 16

# Reproducing the image



Assigned to: Andrea

These are the instructions to reproduce the Ubuntu image that we use.

Please note that the image is already available, so you don't need to do this manually. However, this documentation might be useful if you would like to port the software to a different distribution.

Resources necessary:

**Requires:** Internet connection to download the packages. Requires: A PC running any Linux with an SD card reader. Requires: Time: about 20 minutes.

Results:

- A baseline Ubuntu Mate 16.04.2 image with updated software.

### 16.1. Download and uncompress the Ubuntu Mate image



Download the image from the page

<https://ubuntu-mate.org/download/>

The file we are looking for is:

```
filename: ubuntu-mate-16.04.2-desktop-armhf-raspberry-pi.img.xz
size: 1.2 GB
SHA256: dc3afcad68a5de3ba683dc30d2093a3b5b3cd6b2c16c0b5de8d50fede78f75c2
```

After download, run the command `sha256sum` to make sure you have the right version:

\$ sha256sum ubuntu-mate-16.04.2-desktop-armhf-raspberry-pi.img.xz  
dc3afcad68a5de3ba683dc30d2093a3b5b3cd6b2c16c0b5de8d50fede78f75c2

If the string does not correspond exactly, your download was corrupted. Delete the file and try again.

Then decompress using the command `xz`:

\$ xz -d ubuntu-mate-16.04.2-desktop-armhf-raspberry-pi.img.xz

### 16.2. Burn the image to an SD card



Next, burn the image on to the SD card.

- This procedure is explained in [Section 93.2](#).

1) Verify that the SD card was created correctly



Remove the SD card and plug it in again in the laptop.

Ubuntu will mount two partitions, by the name of `PI_ROOT` and `PI_BOOT`.

## 2) Installation

Boot the disk in the Raspberry Pi.

Choose the following options:

```
language: English  
username: ubuntu  
password: ubuntu  
hostname: duckiebot
```

Choose the option to log in automatically.

Reboot.

## 3) Update installed software

The WiFi was connected to airport network `duckietown` with password `quackquack`.

Afterwards I upgraded all the software preinstalled with these commands:



```
$ sudo apt update  
$ sudo apt dist-upgrade
```

Expect `dist-upgrade` to take quite a long time (up to 2 hours).

## 16.3. Raspberry Pi Config

The Raspberry Pi is not accessible by SSH by default.

Run `raspi-config`:



```
$ sudo raspi-config
```

choose “3. Interfacing Options”, and enable SSH,

We need to enable the camera and the I2C bus.

choose “3. Interfacing Options”, and enable camera, and I2C.

Also disable the graphical boot

## 16.4. Install packages

Install these packages.

Etckeeper:



```
$ sudo apt install etckeeper
```

Editors / shells:



```
$ sudo apt install -y vim emacs byobu zsh
```

Git:

 \$ sudo apt install -y git git-extras

Other:

 \$ sudo apt install htop atop nethogs iftop  
\$ sudo apt install aptitude apt-file

Development:

 \$ sudo apt install -y build-essential libblas-dev liblapack-dev libatlas-base-dev gfortran  
libyaml-cpp-dev

Python:

 \$ sudo apt install -y python-dev ipython python-sklearn python-smbus  
\$ sudo apt install -y python-termcolor  
\$ sudo pip install scipy --upgrade

I2C:

 \$ sudo apt install -y i2c-tools

## 16.5. Install Edimax driver



First, mark the kernel packages as not upgradeable:

```
$ sudo apt-mark hold raspberrypi-kernel raspberrypi-kernel-headers  
raspberrypi-kernel set on hold.  
raspberrypi-kernel-headers set on hold
```

Then, download and install the Edimax driver from [this repository](#).

```
$ git clone git@github.com:duckietown/rtl18822bu.git  
$ cd rtl18822bu  
$ make  
$ sudo make install
```

## 16.6. Install ROS



Install ROS.

→ The procedure is given in [Section 108.1](#).

## 16.7. Wireless configuration (old version)



This is the old version.

There are two files that are important to edit.

The file `/etc/network/interfaces` should look like this:

```
# interfaces(5) file used by ifup(8) and ifdown(8)
# Include files from /etc/network/interfaces.d:
#source-directory /etc/network/interfaces.d

auto wlan0

# The loopback network interface
auto lo
iface lo inet loopback

# Wireless network interface
allow-hotplug wlan0
iface wlan0 inet dhcp
wpa-conf /etc/wpa_supplicant/wpa_supplicant.conf
iface default inet dhcp
```

The file `/etc/wpa_supplicant/wpa_supplicant.conf` should look like this:

```
ctrl_interface=DIR=/var/run/wpa_supplicant GROUP=netdev
update_config=1

network={
    ssid="duckietown"
    psk="quackquack"
    proto=RSN
    key_mgmt=WPA-PSK
    pairwise=CCMP
    auth_alg=OPEN
}
network={
    key_mgmt=NONE
}
```

## 16.8. Wireless configuration

The files that describe the network configuration are in the directory

```
/etc/NetworkManager/system-connections/
```

This is the contents of the connection file `duckietown`, which describes how to connect to the `duckietown` wireless network:

```
[connection]
id=duckietown
uuid=e9cef1bd-f6fb-4c5b-93cf-cca837ec35f2
type=wifi
permissions=
secondaries=
timestamp=1502254646

[wifi]
mac-address-blacklist=
mac-address-randomization=0
mode=infrastructure
ssid=duckietown

[wifi-security]
group=
key-mgmt=wpa-psk
pairwise=
proto=
psk=quackquack

[ipv4]
dns-search=
method=auto

[ipv6]
addr-gen-mode=stable-privacy
dns-search=
ip6-privacy=0
method=auto
```

This is the file

```
/etc/NetworkManager/system-connections/create-5ghz-network
```

Contents:

```
[connection]
id=create-5ghz-network
uid=7331d1e7-2cdf-4047-b426-c170ecc16f51
type=wifi
# Put the Edimax interface name here:
interface-name=wlx74da38c9caa0 - to change
permissions=
secondaries=
timestamp=1502023843

[wifi]
band=a
# Put the Edimax MAC address here
mac-address=74:DA:38:C9:CA:A0 - to change
mac-address-blacklist=
mac-address-randomization=0
mode=ap
seen-bssids=
ssid=duckiebot-not-configured

[ipv4]
dns-search=
method=shared

[ipv6]
addr-gen-mode=stable-privacy
dns-search=
ip6-privacy=0
method=ignore
```

Note that there is an interface name and MAC address that need to be changed on each PI.

## 16.9. SSH server config

This enables the SSH server:

```
$ sudo systemctl enable ssh
```

## 16.10. Create swap Space

Do the following:

Create an empty file using the `dd` (device-to-device copy) command:



```
$ sudo dd if=/dev/zero of=/swap0 bs=1M count=512
```

This is for a 512 MB swap space.

Format the file for use as swap:



```
$ sudo mkswap /swap0
```

Add the swap file to the system configuration:



```
$ sudo vi /etc/fstab
```

Add this line to the bottom:

```
/swap0 swap swap
```

Activate the swap space:



```
$ sudo swapon -a
```

## 16.11. Passwordless sudo

First, make `vi` the default editor, using

```
$ sudo update-alternatives --config editor
```

and then choose `vim.basic`.

Then run:

```
$ sudo visudo
```

And then change this line:

```
%sudo    ALL=(ALL:ALL)  ALL
```

into this line:

```
%sudo    ALL=(ALL:ALL)  NOPASSWD:ALL
```

## 16.12. Clean up

You can use the command `dpigs` to find out which packages take lots of space.

```
$ sudo apt install wajig debian-goodies
```

Either:

```
$ wajig large  
$ dpigs -H -n 20
```

Stuff to remove:

```
$ sudo apt remove thunderbird  
$ sudo apt remove libreoffice-*  
$ sudo apt remove openjdk-8-jre-headless  
$ sudo apt remove fonts-noto-cjk  
$ sudo apt remove brasero
```

At the end, remove extra dependencies:

```
$ sudo apt autoremove
```

And remove the `apt` cache using:

```
$ sudo apt clean
```

The total size should be around 6.6GB.

### 16.13. Ubuntu user configuration

#### 1) Groups

You should make the `ubuntu` user belong to the `i2c` and `input` groups:



```
$ sudo adduser ubuntu i2c  
$ sudo adduser ubuntu input
```

: forgot to add to aug20 image:



```
$ sudo adduser ubuntu video
```

You may need to do the following (but might be done already through `raspi-config`):



```
$ sudo udevadm trigger
```

#### 2) Basic SSH config

Do the basic SSH config.

- The procedure is documented in [Section 95.3](#).

**Note:** this is not in the aug10 image.

#### 3) Passwordless SSH config

Add `.authorized_keys` so that we can all do passwordless SSH.

The key is at the URL

```
https://www.dropbox.com/s/pxyou3qy1p8m4d0/duckietown_key1.pub?dl=1
```

Download to `.ssh/authorized_keys`:



```
$ curl -o .ssh/authorized_keys URL above
```

#### 4) Shell prompt

Add the following lines to `~ubuntu/.bashrc`:

```
echo ""
echo "Welcome to a duckiebot!"
echo ""
echo "Reminders:"
echo ""
echo "1) Do not use the user 'ubuntu' for development - create your own user."
echo "2) Change the name of the robot from 'duckiebot' to something else."
echo ""

export EDITOR=vim
```

#### 16.14. Check that all required packages were installed

At this point, before you copy/distribute the image, create a user, install the software, and make sure that `what-the-duck` does not complain about any missing package.

(Ignore `what-the-duck`'s errors about things that are not set up yet, like users.)

#### 16.15. Creating the image

You may now want to create an image that you can share with your friends. They will think you are cool because they won't have to duplicate all of the work that you just did. Luckily this is easy. Just power down the duckiebot with:



`$ sudo shutdown -h now`

and put the SD card back in your laptop.

- The procedure of how to burn an image is explained in [Section 93.2](#); except you will invert the `if` and `of` destinations.

You may want to subsequently shrink the image, for example if your friends have smaller SD cards than you.

- The procedure of how to shrink an image is explained in [Section 93.3](#).

#### 16.16. Some additions since last image to add in the next image

Note here the additions since the last image was created.

Create a file

`/etc/duckietown-image.yaml`

Containing these lines

```
base: Ubuntu 16.04.2
date: DATE
comments: I
any comments you have
```

So that we know which image is currently in used.

Install `ntpdate`:

```
$ sudo apt install ntpdate
```

**Note:** We should install Git LFS on the Raspberry Pi, but so far AC did not have any luck. See [Section 103.1](#).

## CHAPTER 17

# Installing Ubuntu on laptops



Assigned to: Andrea

Before you prepare the Duckiebot, you need to have a laptop with Ubuntu installed.

Requires: A laptop with free disk space.

Requires: Internet connection to download the Ubuntu image.

Requires: About ??? minutes .

Results:

- A laptop ready to be used for Duckietown.

### 17.1. Install Ubuntu



Install Ubuntu 16.04.2.

→ For instructions, see for example [this online tutorial](#).

**On the choice of username:** During the installation, create a user for yourself with a username different from `ubuntu`, which is the default. Otherwise, you may get confused later.

### 17.2. Install useful software



Use `etckeeper` to keep track of the configuration in `/etc`:

\$ sudo apt install etckeeper

Install `ssh` to login remotely and the server:

\$ sudo apt install ssh

Use `byobu`:

\$ sudo apt install byobu

Use `vim`:

\$ sudo apt install vim

Use `htop` to monitor CPU usage:

\$ sudo apt install htop

Additional utilities for `git`:

\$ sudo apt install git git-extras

Other utilities:



```
$ sudo apt install avahi-utils cryptfs-utils
```

### 17.3. Install ROS



Install ROS on your laptop.

- The procedure is given in [Section 108.1](#).

### 17.4. Other suggested software



#### 1) Redshift



This is Flux for Linux. It is an accessibility/lab safety issue: bright screens damage eyes and perturb sleep [4].

Install redshift and run it.



```
$ sudo apt install redshift-gtk
```

Set to “autostart” from the icon.

### 17.5. Installation of the duckuments system



Optional but very encouraged: install the duckuments system. This will allow you to have a local copy of the documentation and easily submit questions and changes.

- The procedure is documented in [Section 5.4](#).

### 17.6. Passwordless sudo



Set up passwordless `sudo`.

- This procedure is described in [Section 16.11](#).

### 17.7. SSH and Git setup



#### 1) Basic SSH config



Do the basic SSH config.

- The procedure is documented in [Section 95.3](#).

#### 2) Create key pair for `username`



Next, create a private/public key pair for the user; call it `username@robot.name`.

- The procedure is documented in [Section 95.5](#).

---

### 3) Add **username**'s public key to Github

Add the public key to your Github account.

- The procedure is documented in [Section 104.3](#).

If the step is done correctly, this command should succeed:



```
$ ssh -T git@github.com
```

---

### 4) Local Git setup

Set up Git locally.

- The procedure is described in [Section 102.3](#).

# CHAPTER 18

## Duckiebot Initialization

Assigned to: Andrea

Requires: An SD card of dimensions at least 32 GB.

Requires: A computer with an internet connection, an SD card reader, and 35 GB of free space.

Requires: An assembled Duckiebot in configuration D17-C0. This is the result of

Cannot find assembling-duckiebot

Result:

- A Duckiebot that is ready to use.

What does it mean “ready to use”?

### 18.1. Acquire and burn the image

On the laptop, download the compressed image at this URL:

<https://www.dropbox.com/s/1p4am7erdd9e53r/duckiebot-RPI3-AC-aug10.img.xz?dl=1>

The size is 2.5 GB.

You can use:

```
$ curl -o duckiebot-RPI3-AC-aug10.img.xz URL above
```

Uncompress the file:

```
$ xz -d -k duckiebot-RPI3-AC-aug10.img.xz
```

This will create a file of 32 GB in size.

To make sure that the image is downloaded correctly, compute its hash using the program sha256sum:

```
$ sha256sum duckiebot-RPI3-AC-aug10.img  
2ea79b0fc6353361063c89977417fc5e8fde70611e8afa5cbf2d3a166d57e8cf duckiebot-ac-aug10.img
```

Compare the hash that you obtain with the hash above. If they are different, there was some problem in downloading the image.

Next, burn the image on disk.

- The procedure of how to burn an image is explained in [Section 93.2](#).

### 18.2. Turn on the Duckiebot

Put the SD Card in the Duckiebot.

Turn on the Duckiebot by connecting the power cable to the battery.

### 18.3. Connect the Duckiebot to a network

You can login to the Duckiebot in two ways:

1. Through an Ethernet cable.
2. Through a duckietown WiFi network.

In the worst case, you can use an HDMI monitor and a USB keyboard.

#### 1) Option 1: Ethernet cable

Connect the Duckiebot and your laptop to the same network switch.

Allow 30 s - 1 minute for the DHCP to work.

#### 2) Option 2: Duckietown network

The Duckiebot connects automatically to a 2.4 GHz network called “`duckietown`” and password “`quackquack`”.

Connect your laptop to the same wireless network.

### 18.4. Ping the Duckiebot

To test that the Duckiebot is connected, try to ping it.

The hostname of a freshly-installed duckiebot is `duckiebot-not-configured`:

```
💻 $ ping duckiebot-not-configured.local
```

You should see output similar to the following:

```
PING duckiebot-not-configured.local (X.X.X.X): 56 data bytes
64 bytes from X.X.X.X: icmp_seq=0 ttl=64 time=2.164 ms
64 bytes from X.X.X.X: icmp_seq=1 ttl=64 time=2.303 ms
...
```

### 18.5. SSH to the Duckiebot

Next, try to log in using SSH, with account `ubuntu`:

```
💻 $ ssh ubuntu@duckiebot-not-configured.local
```

The password is `ubuntu`.

By default, the robot boots into Byobu.

Please see [Chapter 101](#) for an introduction to Byobu.

Not sure it's a good idea to boot into Byobu.

### 18.6. (For D17-C1) Configure the robot-generated network

D17-θ+w The Duckiebot in configuration D17-Cθ+w can create a WiFi network.

It is a 5 GHz network; this means that you need to have a 5 GHz WiFi adapter in your laptop.

First, make sure that the Edimax is correctly installed. Using `iwconfig`, you should see four interfaces:



```
$ iwconfig  
wlxAABBCCDDEEFFGG unassociated Nickname:"rt18822bu"  
...  
lo      no wireless extensions.  
  
enxb827eb1f81a4  no wireless extensions.  
  
wlan1    IEEE 802.11bgn  ESSID:"duckietown"  
...  
...
```

Make note of the name `wlxAABBCCDDEEFFGG`.

Look up the MAC address using the command:



```
$ ifconfig wlan1  
wlan1: Link encap:Ethernet  HWaddr AA:BB:CC:DD:EE:FF:GG
```

Then, edit the connection file

```
/etc/NetworkManager/system-connections/create-5ghz-network
```

Make the following changes:

- Where it says `interface-name=...`, put “`wlxAABBCCDDEEFFGG`”.
- Where it says `mac-address=...`, put “`AA:BB:CC:DD:EE:FF:GG`”.
- Where it says `ssid=duckiebot-not-configured`, put “`ssid=robot name`”.

Reboot.

At this point you should see a new network being created named “`robot name`”.

You can connect with the laptop to that network.

If the Raspberry Pi’s network interface is connected to the `duckietown` network and to the internet, the Raspberry Pi will act as a bridge to the internet.

## 18.7. Setting up wireless network configuration

This part should not be necessary anymore

The Duckiebot is configured by default to connect to a wireless network with SSID `duckietown`. If that is not your SSID then you will need to change the configuration.

You can add a new network by editing the file:

```
/etc/wpa_supplicant/wpa_supplicant.conf
```

You will see a block like the following:

```
network={
    ssid="duckietown"
    scan_ssid=1
    psk="quackquack"
    priority=10
}
```

Add a new one with your SSID and password.

This assumes you have a roughly similar wireless network setup - if not then you might need to change some of the other attributes.

## 18.8. Update the system

Next, we need to update to bring the system up to date.

Use these commands



```
$ sudo apt update
$ sudo apt dist-upgrade
```

## 18.9. Give a name to the Duckiebot

It is now time to give a name to the Duckiebot.

These are the criteria:

- It should be a simple alphabetic string (no numbers or other characters like “-”, “\_”, etc.).
- It will always appear lowercase.
- It cannot be a generic name like “duckiebot”, “robot” or similar.

From here on, we will refer to this string as “`robot name`”. Every time you see `robot name`, you should substitute the name that you chose.

## 18.10. Change the hostname

We will put the robot name in configuration files.

**Note:** Files in `/etc` are only writable by `root`, so you need to use `sudo` to edit them. For example:



```
$ sudo vi filename
```

Edit the file

```
/etc/hostname
```

and put “`robot name`” instead of `duckiebot-not-configured`.

Also edit the file

```
/etc/hosts
```

and put “`robot name`” where `duckiebot-not-configured` appears.

The first two lines of `/etc/hosts` should be:

```
127.0.0.1 localhost
127.0.1.1 robot name
```

**Note:** there is a command `hostname` that promises to change the hostname. However, the change given by that command does not persist across reboots. You need to edit the files above for the changes to persist.

**Note:** Never add other hostnames in `/etc/hosts`. It is a tempting fix when DNS does not work, but it will cause other problems subsequently.

Then reboot the Raspberry Pi using the command

```
$ sudo reboot
```

After reboot, log in again, and run the command `hostname` to check that the change has persisted:

```
$ hostname
robot name
```

## 18.11. Expand your filesystem

If your SD card is larger than the image, you'll want to expand the filesystem on your robot so that you can use all of the space available. Achieve this with:



```
$ sudo raspi-config --expand-rootfs
```

and then reboot



```
$ sudo shutdown -r now
```

once rebooted you can test whether this was successful by doing



```
$ df -lh
```

the output should give you something like:

Filesystem	Size	Used	Avail	Use%	Mounted on
/dev/root	29G	7.8G	21G	28%	/
devtmpfs	427M	0	427M	0%	/dev
tmpfs	432M	316K	431M	1%	/dev/shm
tmpfs	432M	12M	420M	3%	/run
tmpfs	5.0M	4.0K	5.0M	1%	/run/lock
tmpfs	432M	0	432M	0%	/sys/fs/cgroup
/dev/mmcblk0p1	63M	21M	43M	34%	/boot
tmpfs	87M	24K	87M	1%	/run/user/1000
/dev/sda1	29G	5.3G	24G	19%	/media/ubuntu/44A7-9E91

You should see that the Size of your `/dev/sda1` partition is “close” to the size of your SD card.

## 18.12. Create your user

You must not use the `ubuntu` user for development. Instead, you need to create a new user.

Choose a user name, which we will refer to as `username`.

To create a new user:

 \$ sudo useradd -m `username`

Make the user an administrator by adding it to the group `sudo`:

 \$ sudo adduser `username` sudo

Make the user a member of the group `input` and `i2c`

 \$ sudo adduser `username` input  
\$ sudo adduser `username` video  
\$ sudo adduser `username` i2c

Set the shell `bash`:

 \$ sudo chsh -s /bin/bash andrea

To set a password, use:

 \$ sudo passwd `username`

At this point, you should be able to login to the new user from the laptop using the password:

 \$ ssh `username@robot_name`

Next, you should repeat some steps that we already described.

### 1) Basic SSH config

Do the basic SSH config.

- The procedure is documented in [Section 95.3](#).

### 2) Create key pair for `username`

Next, create a private/public key pair for the user; call it `username@robot_name`.

- The procedure is documented in [Section 95.5](#).

### 3) Add `username`'s public key to Github

Add the public key to your Github account.

- The procedure is documented in [Section 104.3](#).

If the step is done correctly, this command should succeed:



```
$ ssh -T git@github.com
```

#### 4) Local Git configuration

- This procedure is in [Section 102.3](#).

#### 5) Set up the laptop-Duckiebot connection

Make sure that you can login passwordlessly to your user from the laptop.

- The procedure is explained in [Section 95.6](#). In this case, we have: `local` = laptop, `local-user` = your local user on the laptop, `remote` = `robot name`, `remote-user` = `username`.

If the step is done correctly, you should be able to login from the laptop to the robot, without typing a password:



```
$ ssh username@robot name
```

#### 6) Some advice on the importance of passwordless access

In general, if you find yourself:

- typing an IP
- typing a password
- typing `ssh` more than once
- using a screen / USB keyboard

it means you should learn more about Linux and networks, and you are setting yourself up for failure.

Yes, you “can do without”, but with an additional 30 seconds of your time. The 30 seconds you are not saving every time are the difference between being productive roboticians and going crazy.

Really, it is impossible to do robotics when you have to think about IPs and passwords...

### 18.13. Other customizations

If you know what you are doing, you are welcome to install and use additional shells, but please keep Bash as be the default shell. This is important for ROS installation.

For the record, our favorite shell is ZSH with `oh-my-zsh`.

### 18.14. Hardware check: camera

Check that the camera is connected using this command:



```
$ v4lencmd get_camera  
supported=1 detected=1
```

If you see `detected=0`, it means that the hardware connection is not working.

You can test the camera right away using a command-line utility called `raspistill`.

Use the `raspistill` command to capture the file `out.jpg`:

 \$ raspistill -t 1 -o out.jpg

Then download `out.jpg` to your computer using `scp` for inspection.

- For instructions on how to use `scp`, see [Subsection 97.1.1](#).

## 1) Troubleshooting



**Symptom:** `detected=0`

**Resolution:** If you see `detected=0`, it is likely that the camera is not connected correctly.

If you see an error that starts like this:

```
mmal: Cannot read camera info, keeping the defaults for OV5647  
...  
mmal: Camera is not detected. Please check carefully the camera module is installed correctly.
```

then, just like it says: “Please check carefully the camera module is installed correctly.”.

# CHAPTER 19

## Software setup and RC remote control

Assigned to: Andrea

Requires: Laptop configured, according to [Chapter 17](#).

Requires: You have configured the Duckiebot. The procedure is documented in [Chapter 18](#).

Requires: You have created a Github account and configured public keys, both for the laptop and for the Duckiebot. The procedure is documented in [Chapter 104](#).

Results:

- You can run the joystick demo.

### 19.1. Clone the Duckietown repository

Clone the repository in the directory `~/duckietown`:



```
$ git clone git@github.com:duckietown/Software.git ~/duckietown
```

For the above to succeed you should have a Github account already set up.

It should not ask for a password.

#### 1) Troubleshooting

**Symptom:** It asks for a password.

Resolution: You missed some of the steps described in [Chapter 104](#).

**Symptom:** Other weird errors.

Resolution: Probably the time is not set up correctly. Use `ntpdate` as above:

```
$ sudo ntpdate -u us.pool.ntp.org
```

### 19.2. Set up ROS environment on the Duckiebot

All the following commands should be run in the `~/duckietown` directory:



```
$ cd ~/duckietown
```

Now we are ready to make the workspace. First you need to source the baseline ROS environment:



```
$ source /opt/ros/kinetic/setup.bash
```

Then, build the workspace using:



```
$ catkin_make -C catkin_ws/
```

\* For more information about `catkin_make`, see [Section 108.6](#).

**Note:** there is a known bug, for which it fails the first time on the Raspberry Pi. Try again; it will work.

### 19.3. Add your vehicle to the scuderia file

Add your vehicle to the scuderia file.

→ See [Section 105.2](#).

### 19.4. Test that the joystick is detected

Plug the joystick receiver in one of the USB port on the Raspberry Pi.

To make sure that the joystick is detected, run:

 \$ ls /dev/input/

and check if there is a device called `js0` on the list.

#### Check before you continue

Make sure that your user is in the group `input` and `i2c`:

 \$ groups  
username sudo input i2c

If `input` and `i2c` are not in the list, you missed a step. Ohi ohi! You are not following the instructions carefully!

→ Consult again [Section 18.12](#).

To test whether or not the joystick itself is working properly, run:

 \$ jstest /dev/input/js0

Move the joysticks and push the buttons. You should see the data displayed change according to your actions.

### 19.5. Run the joystick demo

SSH into the Raspberry Pi and run the following from the `duckietown` directory:

 \$ cd ~/duckietown  
\$ source environment.sh

The `environment.sh` setups the ROS environment at the terminal (so you can use commands like `rosrun` and `roslaunch`).

Now make sure the motor shield is connected.

Run the command:



```
$ roslaunch duckietown joystick.launch veh:=robot name
```

If there is no “red” output in the command line then pushing the left joystick knob controls throttle - right controls steering.

This is the expected result of the commands:

left joystick up	forward
left joystick down	backward
right joystick left	turn left (positive yaw)
right joystick right	turn right (negative yaw)

It is possible you will have to unplug and replug the joystick or just push lots of buttons on your joystick until it wakes up. Also make sure that the mode switch on the top of your joystick is set to “X”, not “D”.

Is all of the above valid with the new joystick?

Close the program using **Ctrl-C**.

## 1) Troubleshooting



**Symptom:** The robot moves weirdly (e.g. forward instead of backward).

**Resolution:** The cables are not correctly inserted. Please refer to the assembly guide for pictures of the correct connections. Try swapping cables until you obtain the expected behavior.

**Resolution:** Check that the joystick has the switch set to the position “x”. And the mode light should be off.

**Symptom:** The left joystick does not work.

**Resolution:** If the green light on the right to the “mode” button is on, click the “mode” button to turn the light off. The “mode” button toggles between left joystick or the cross on the left.

**Symptom:** The robot does not move at all.

**Resolution:** The cables are disconnected.

**Resolution:** The program assumes that the joystick is at `/dev/input/js0`. In doubt, see [Section 19.4](#).

## 19.6. The proper shutdown procedure for the Raspberry Pi



Generally speaking, you can terminate any `roslaunch` command with **Ctrl-C**.

To completely shutdown the robot, issue the following command:



```
$ sudo shutdown -h now
```

Then wait 30 seconds.

**Warning:** If you disconnect the power before shutting down properly using `shutdown`, the system might get corrupted.

Then, disconnect the power cable, at the **battery end**.

**Warning:** If you disconnect frequently the cable at the Raspberry Pi’s end, you might damage the port.



# CHAPTER 20

## Reading from the camera

**Requires:** You have configured the Duckiebot. The procedure is documented in [Chapter 18](#).

**Requires:** You know the basics of ROS (launch files, `roslaunch`, topics, `rostopic`).

Results:

- You know that the camera works under ROS.

### 20.1. Check the camera hardware

It might be useful to do a quick camera hardware check.

- The procedure is documented in [Section 18.14](#).

### 20.2. Create two windows

On the laptop, create two Byobu windows.

- A quick reference about Byobu commands is in [Chapter 101](#).

You will use the two windows as follows:

- In the first window, you will launch the nodes that control the camera.
- In the second window, you will launch programs to monitor the data flow.

**Note:** You could also use multiple *terminals* instead of one terminal with multiple Byobu windows. However, using Byobu is the best practice to learn.

### 20.3. First window: launch the camera nodes

In the first window, we will launch the nodes that control the camera.

Activate ROS:



```
$ source environment.sh
```

Run the launch file called `camera.launch`:



```
$ rosrun duckietown camera.launch veh:=robot name
```

At this point, you should see the red LED on the camera light up continuously.

In the terminal you should not see any red message, but only happy messages like the following:

```
...
```

```
[INFO] [1502539383.948237]: [/robot name/camera_node] Initialized.  
[INFO] [1502539383.951123]: [/robot name/camera_node] Start capturing.  
[INFO] [1502539384.040615]: [/robot name/camera_node] Published the first image.
```

\* For more information about `roslaunch` and “launch files”, see [Section 108.3](#).

## 20.4. Second window: view published topics

Switch to the second window.

Activate the ROS environment:

 \$ source environment.sh

### 1) List topics

You can see a list of published topics with the command:

 \$ rostopic list

\* For more information about `rostopic`, see [Section 108.5](#).

You should see the following topics:

```
/robot_name/camera_node/camera_info
/robot_name/camera_node/image/compressed
/robot_name/camera_node/image/raw
/rosout
/rosout_agg
```

### 2) Show topics frequency

You can use `rostopic hz` to see the statistics about the publishing frequency:

 \$ rostopic hz /robot\_name/camera\_node/image/compressed

On a Raspberry Pi 3, you should see a number close to 30 Hz:

```
average rate: 30.016
min: 0.026s max: 0.045s std dev: 0.00190s window: 841
```

### 3) Show topics data

You can view the messages in real time with the command `rostopic echo`:

 \$ rostopic echo /robot\_name/camera\_node/image/compressed

You should see a large sequence of numbers being printed to your terminal.

That’s the “image” — as seen by a machine.

If you are Neo, then this already makes sense. If you are not Neo, in [Chapter 22](#), you will learn how to visualize the image stream on the laptop using `rviz`.

use `Ctrl-C` to stop `rostopic`.

# CHAPTER 21

## RC control launched remotely

Assigned to: Andrea

**Requires:** You can run the joystick demo from the Raspberry Pi. The procedure is documented in [Chapter 19](#).

Results:

- You can run the joystick demo from your laptop.

### 21.1. Two ways to launch a program

ROS nodes can be launched in two ways:

1. “local launch”: log in to the Raspberry Pi using SSH and run the program from there.
2. “remote launch”: run the program directly from a laptop.

Which is better when is a long discussion that will be done later. Here we set up the “remote launch”.

### 21.2. Download and setup Software repository on the laptop

As you did on the Duckiebot, you should clone the `Software` repository in the `~/duckietown` directory.

- The procedure is documented in [Section 19.1](#).

Then, you should build the repository.

- This procedure is documented in [Section 19.2](#).

### 21.3. Edit the `machines` files on your laptop

You have to edit the `machines` files on your laptop, as you did on the Duckiebot.

- The procedure is documented in [Section 19.3](#).

### 21.4. Start the demo

Now you are ready to launch the joystick demo remotely.

#### Check before you continue

Make sure that you can login with SSH without a password. From the laptop, run:



```
$ ssh username@robot_name.local
```

If this doesn't work, you missed some previous steps.

Run this *on the laptop*:

```
 $ source environment.sh  
$ roslaunch duckietown joystick.launch veh:=robot name
```

You should be able to drive the vehicle with joystick just like the last example. Note that remotely launching nodes from your laptop doesn't mean that the nodes are running on your laptop. They are still running on the Raspberry Pi in this case.

\* For more information about `roslaunch`, see [Section 108.3](#).

## 21.5. Watch the program output using `rqt_console`



Also, you might have noticed that the terminal where you launch the launch file is not printing all the printouts like the previous example. This is one of the limitations of remote launch.

Don't worry though, we can still see the printouts using `rqt_console`.

On the laptop, open a new terminal window, and run:

```
 $ export ROS_MASTER_URI=http://robot name.local:11311/  
$ rqt_console
```

AC: I could not see any messages in `rqt_console` - not sure what is wrong.

You should see a nice interface listing all the printouts in real time, completed with filters that can help you find that message you are looking for in a sea of messages.

You can use `(Ctrl-C)` at the terminal where `roslaunch` was executed to stop all the nodes launched by the launch file.

\* For more information about `rqt_console`, see [Section 108.2](#).

## 21.6. Troubleshooting



**Symptom:** `roslaunch` fails with an error similar to the following:

```
remote[robot name.local-0]: failed to launch on robot name:
```

```
Unable to establish ssh connection to [username@robot name.local:22]:  
Server u'robot name.local' not found in known_hosts.
```

**Resolution:** You have not followed the instructions that told you to add the `HostKeyAlgo-`  
`rithms` option. Delete `~/.ssh/known_hosts` and fix your configuration.

→ The procedure is documented in [Section 95.3](#).

# CHAPTER 22

## RC+camera remotely

Assigned to: Andrea

**Requires:** You can run the joystick demo remotely. The procedure is documented in [Chapter 21](#).

**Requires:** You can read the camera data from ROS. The procedure is documented in [Chapter 20](#).

**Requires:** You know how to get around in Byobu. You can find the Byobu tutorial in [Chapter 101](#).

Results:

- You can run the joystick demo from your laptop and see the camera image on the laptop.

### 22.1. Assumptions

We are assuming that the joystick demo in [Chapter 21](#) worked.

We are assuming that the procedure in [Chapter 20](#) succeeded.

We also assume that you terminated all instances of `roslaunch` with `Ctrl-C`, so that currently there is nothing running in any window.

### 22.2. Terminal setup

On the laptop, this time create four Byobu windows.

→ A quick reference about Byobu commands is in [Chapter 101](#).

You will use the four windows as follows:

- In the first window, you will run the joystick demo, as before.
- In the second window, you will launch the nodes that control the camera.
- In the third window, you will launch programs to monitor the data flow.
- In the fourth window, you will use `rviz` to see the camera image.

### 22.3. First window: launch the joystick demo

In the first window, launch the joystick remotely using the same procedure in [Section 21.4](#).

 \$ source environment.sh  
\$ roslaunch duckietown joystick.launch veh:=`robot name`

You should be able to drive the robot with the joystick at this point.

### 22.4. Second window: launch the camera nodes

In the second window, we will launch the nodes that control the camera.

The launch file is called `camera.launch`:

```
 $ source environment.sh
$ roslaunch duckietown camera.launch veh:=robot name
```

You should see the red led on the camera light up.

## 22.5. Third window: view data flow



Open a third terminal on the laptop.

You can see a list of topics currently on the `ROS_MASTER` with the commands:

```
 $ source environment.sh
$ export ROS_MASTER_URI=http://robot name.local:11311/
$ rostopic list
```

You should see the following:

```
/diagnostics
/robot name/camera_node/camera_info
/robot name/camera_node/image/compressed
/robot name/camera_node/image/raw
/robot name/joy
/robot name/wheels_driver_node/wheels_cmd
/rosout
/rosout_agg
```

## 22.6. Fourth window: visualize the image using `rviz`



Launch `rviz` by using these commands:

```
 $ source environment.sh
$ source set_ros_master.sh robot name
$ rviz
```

\* For more information about `rviz`, see [Section 108.4](#).

In the `rviz` interface, click “Add” on the lower left, then the “By topic” tag, then select the “Image” topic by the name

```
/robot name/camera_node/image/compressed
```

Then click “ok”. You should be able to see a live stream of the image from the camera.

## 22.7. Proper shutdown procedure



To stop the nodes: You can stop the node by pressing `Ctrl-C` on the terminal where `roslaunch` was executed. In this case, you can use `Ctrl-C` in the terminal where you

launched the `camera.launch`.

You should see the red light on the camera turn off in a few seconds.

Note that the `joystick.launch` is still up and running, so you can still drive the vehicle with the joystick.

## CHAPTER 23

### Interlude: Ergonomics



Assigned to: Andrea

So far, we have been spelling out all commands for you, to make sure that you understand what is going on.

Now, we will tell you about some shortcuts that you can use to save some time.

**Note:** in the future you will have to debug problems, and these problems might be harder to understand if you rely blindly on the shortcuts.

Results:

- You will know about some useful shortcuts.

#### 23.1. set\_ros\_master.sh



Instead of using:

```
$ export ROS_MASTER_URI=http://robot_name.local:11311/
```

You can use the “`set_ros_master.sh`” script in the repo:

```
$ source set_ros_master.sh robot_name
```

Note that you need to use `source`; without that, it will not work.

#### 23.2. SSH aliases



Instead of using

```
$ ssh username@robot_name.local
```

You can set up SSH so that you can use:

```
$ ssh my-robot
```

To do this, create a host section in `~/.ssh/config` with the following contents:

```
Host my-robot
User username
Hostname robot_name.local
```

Here, you can choose any other string in place of “`my-robot`”.

Note that you **cannot** do

```
$ ping my-robot
```

You haven’t created another hostname, just an alias for SSH.

However, you can use the alias with all the tools that rely on SSH, including `rsync` and `scp`.

## CHAPTER 24

# Wheel calibration



| Assigned to: Andrea

# CHAPTER 25

## Camera calibration



## CHAPTER 26

# Taking a log



| Assigned to: Andrea

PART 4

## Operation manual - Duckietowns

..

CHAPTER 27

# Duckietown parts



| Assigned to: Jacopo

## CHAPTER 28

# Duckietown Assembly

..

| Assigned to: Shiying

## CHAPTER 29

# The Duckietown specification

| Assigned to: Liam?

### 29.1. Topology

#### 1) Topology constraints

---

### 29.2. Signs placement

# CHAPTER 30

## Traffic lights

..

PART 5

Operation manual - Duckiebot with LEDs



# CHAPTER 31

## D17-1 (LEDs) parts

..

| Assigned to: Jacopo

## CHAPTER 32

### D17-1 (LEDs) assembly



| Assigned to: Shiying

# CHAPTER 33

## D17-1 (LEDs) setup

..

| Assigned to: Andrea

PART 6

## Theory chapters



These are the theory chapters.

# CHAPTER 34

## Chapter template

..

| Assigned to: Jacopo

## CHAPTER 35

# Symbols and conventions

Assigned to: Andrea

### 35.1. Conventions

If  $\mathbf{x}$  is a function of time, use  $\mathbf{x}_t$  rather than  $\mathbf{x}(t)$ .

- \* Consider the function  $\mathbf{x}(t)$ .
- ✓ Consider the function  $\mathbf{x}_t$ .

### 35.2. Table of symbols

Here are some useful symbols.

TABLE 10. SPACES

command	result	
<code>\SOthree</code>	<b>SO(3)</b>	Rotation matrices
<code>\SEthree</code>	<b>SE(3)</b>	Euclidean group
<code>\SEtwo</code>	<b>SE(2)</b>	Euclidean group
<code>\setwo</code>	<b>se(2)</b>	Euclidean group algebra

States and poses:

TABLE 11. POSES AND STATES

command	result	
<code>\pose</code>	$\mathbf{q}_t \in \mathbf{SE}(2)$	Pose of the robot in the plane
<code>\state_t \in \statesp</code>	$\mathbf{x}_t \in \mathcal{X}$	System state (includes the pose, and everything else)

# CHAPTER 36

## Linear algebra

..

| Assigned to: Jacopo

CHAPTER 37

## Probability basics



| Assigned to: Liam?

# CHAPTER 38

## Dynamics



| Assigned to: Jacopo

## CHAPTER 39

# Autonomy overview



| Assigned to: Liam

39.1. Perception, planning, control



# CHAPTER 40

## Autonomy architectures



| Assigned to: Andrea



### 40.1. Contracts

API: Types, messages  
Latency, frequency  
computation  
semantics  
reliability / probability



# CHAPTER 41

## Representations



Assigned to: Matt

Discuss:

- Introduction to the notion of *state* as a sufficient statistic that represents the agent (robot) and environment.
- Define notion of *static* and *dynamic* states.
- Provide examples of robot and environment states.

### 41.1. Preliminaries



Some/all of the following could be simplified or omitted and instead refer readers to reference material.

Discuss basics associated with

- Coordinate systems
- Reference frames
- Transformations

### 41.2. Robot Representations



Define the notion of:

- *pose* for mobile robots;
- *configuration* for manipulators
- robot and joint velocities

Discuss specific robot state representation for Duckietown.

### 41.3. Environment Representations



Discuss:

- Difference between topological and metric environment representations;
- Details of topological representation;
- Common metric representations, notably feature-based maps and gridmaps;

#### 1) Duckietown Environment Representation



Discuss specific environment representation for Duckietown.

## CHAPTER 42

# Software architectures and middlewares



| Assigned to: Andrea

## CHAPTER 43

# Modern signal processing



| Assigned to: Andrea

# CHAPTER 44

## Basic Kinematics



| Assigned to: Jacopo

CHAPTER 45

## Basic Dynamics

| Assigned to: Jacopo

# CHAPTER 46

## Odometry Calibration

..

| Assigned to: Jacopo

CHAPTER 47

## Computer vision basics



| Assigned to: Matt

# CHAPTER 48

## Illumination invariance

..

| Assigned to: Matt

## CHAPTER 49

# Line Detection



| Assigned to: Matt

# CHAPTER 50

## Feature extraction

..

| Assigned to: Matt

## CHAPTER 51

# Place recognition



| Assigned to: Matt

## CHAPTER 52

# Filtering 1

..

| Assigned to: Liam

## CHAPTER 53

# Filtering 2



| Assigned to: Liam

# CHAPTER 54

## Mission planning

..

| Assigned to: ETH

## CHAPTER 55

# Planning in discrete domains



| Assigned to: ETH

# CHAPTER 56

## Motion planning

..

| Assigned to: ETH

CHAPTER 57  
RRT

..

| Assigned to: ETH

# CHAPTER 58

## Feedback control

..

| Assigned to: Jacopo

## CHAPTER 59

# PID Control



| Assigned to: Jacopo

# CHAPTER 60

## MPC Control

..

| Assigned to: Jacopo

## CHAPTER 61

# Object detection



| Assigned to: Nick and David

# CHAPTER 62

## Object classification

..

| Assigned to: Nick and David

CHAPTER 63

## Object tracking



| Assigned to: Nick and David

## CHAPTER 64

# Reacting to obstacles



| Assigned to: Jacopo

## CHAPTER 65

# Semantic segmentation



| Assigned to: Nick and David

# CHAPTER 66

## Text recognition

| Assigned to: Nick

**CHAPTER 67**  
**SLAM - Problem formulation**



| Assigned to: Liam

# CHAPTER 68

## SLAM - Broad categories

..

| Assigned to: Liam

CHAPTER 69  
VINS

..

| Assigned to: Liam

# CHAPTER 70

## Advanced place recognition

| Assigned to: Liam

## CHAPTER 71

# Fleet level planning (placeholder)



| Assigned to: ETH

# CHAPTER 72

## Fleet level planning (placeholder)

..

| Assigned to: ETH

## CHAPTER 73

# Bibliography



- [1] Jacopo Tani, Liam Paull, Maria Zuber, Daniela Rus, Jonathan How, John Leonard, and Andrea Censi. **Duckietown: an innovative way to teach autonomy.** In *EduRobotics 2016*. Athens, Greece, December 2016. pdf
- [2] Liam Paull, Jacopo Tani, Heejin Ahn, Javier Alonso-Mora, Luca Carlone, Michal Cap, Yu Fan Chen, Changhyun Choi, Jeff Dusek, Daniel Hoechener, Shih-Yuan Liu, Michael Novitzky, Igor Franzoni Okuyama, Jason Pazis, Guy Rosman, Valerio Varricchio, Hsueh-Cheng Wang, Dmitry Yershov, Hang Zhao, Michael Benjamin, Christopher Carr, Maria Zuber, Sertac Karaman, Emilio Frazzoli, Domitilla Del Vecchio, Daniela Rus, Jonathan How, John Leonard, and Andrea Censi. **Duckietown: an open, inexpensive and flexible platform for autonomy education and research.** In *IEEE International Conference on Robotics and Automation (ICRA)*. Singapore, May 2017. pdf
- [3] Bruno Siciliano and Oussama Khatib. *Springer Handbook of Robotics*. Springer-Verlag New York, Inc., Secaucus, NJ, USA, 2007.
- [4] Tosini, G., Ferguson, I., Tsubota, K. *Effects of blue light on the circadian system and eye physiology*. Molecular Vision, 22, 61–72, 2016 (online).

## PART 7

# Exercises

..

These are the exercises.

## CHAPTER 74

# ROS Exercises



Progression of ROS skills:

### 74.1. Parameters



- Reading parameters
- Dynamic modification of parameters

### 74.2. Running from a log



- Running from a log

### 74.3. Unit tests



- Unit tests
- Integration with ROS tests

### 74.4. Analytics



- Measure the latency and frequency of the node
- Measure the latency of another node

### 74.5. Visualization



- Making a plot displayed using topic
- Using ROS parameters

# CHAPTER 75

## Line detection

..

CHAPTER 76

# Data processing

A small cluster of three small blue decorative icons.

## CHAPTER 77

# Git and conventions

..

## PART 8

# Software manuals



This part describes things that you should know about UNIX/Linux environments.

Please read the “background reading” section before you start, while the rest can be used as a reference.

Documentation writers: please make sure that every command used has a section in these chapters.

# CHAPTER 78

## Ubuntu packaging with APT

78.1. `apt install`

78.2. `apt update`

1) `apt dist-upgrade`

---

78.3. `apt-key`

78.4. `apt-mark`

78.5. `add-apt-repository`

78.6. `wajig`

78.7. `dpigs`

## CHAPTER 79

# GNU/Linux general notions



| Assigned to: Andrea

### 79.1. Background reading



- UNIX
- Linux
- free software; open source software.

# CHAPTER 80

## Every day Linux

80.1. cd

80.2. sudo

80.3. ls

80.4. cp

80.5. mkdir

80.6. touch

80.7. reboot

80.8. shutdown

80.9. rm

## CHAPTER 81

# Users

### 81.1. passwd

## CHAPTER 82

# UNIX tools

82.1. cat

82.2. tee

82.3. truncate

## CHAPTER 83

### Linux disks and files

83.1. **fdisk**

83.2. **mount**

83.3. **umount**

83.4. **losetup**

83.5. **gparted**

83.6. **dd**

83.7. **sync**

83.8. **df**

## CHAPTER 84

# Other administration commands

84.1. visudo

84.2. update-alternatives

84.3. udevadm

84.4. systemctl

## CHAPTER 85

# Make

### 85.1. make

# CHAPTER 86

## Python-related tools

### 86.1. virtualenv

### 86.2. pip

## CHAPTER 87

# Raspberry-PI commands

87.1. `raspi-config`

87.2. `vcgencmd`

87.3. `raspistill`

87.4. `jstest`

87.5. `swapon`

87.6. `mkswap`

# CHAPTER 88

## Users and permissions

88.1. chmod

88.2. groups

88.3. adduser

88.4. useradd

## CHAPTER 89

# Downloading

89.1. curl

89.2. sha256sum

89.3. xz

# CHAPTER 90

## Shells and environments

90.1. `source`

90.2. `which`

90.3. `export`

## CHAPTER 91

### Other misc commands

91.1. `pgrep`

91.2. `npm`

91.3. `nodejs`

91.4. `ntpdate`

91.5. `chsh`

91.6. `echo`

91.7. `sh`

91.8. `fc-cache`

## CHAPTER 92

# Linux resources usage

### 92.1. Measuring CPU usage using htop

You can use `htop` to monitor CPU usage.

```
$ sudo apt install htop
```

### 92.2. Measuring I/O usage using iotop

Install using:

```
$ sudo apt install iotop
```

### 92.3. How fast is the SD card?

→ [Section 93.1.](#)

## CHAPTER 93

### SD Cards tools

#### 93.1. Testing SD Card and disk speed

Test SD Card (or any disk) speed using the following commands, which write to a file called `filename`.

```
$ dd if=/dev/zero of=filename bs=500K count=1024
$ sync
$ echo 3 | sudo tee /proc/sys/vm/drop_caches
$ dd if=filename of=/dev/null bs=500K count=1024
$ rm filename
```

Note the `sync` and the `echo` command are very important.

Example results:

```
524288000 bytes (524 MB, 500 MiB) copied, 30.2087 s, 17.4 MB/s
524288000 bytes (524 MB, 500 MiB) copied, 23.3568 s, 22.4 MB/s
```

That is write 17.4 MB/s, read 22 MB/s.

#### 93.2. How to burn an image to an SD card

Requires:

- A blank SD card.
- An image file to burn.
- An Ubuntu computer with an SD reader.

Results:

- A burned image.

##### 1) Finding your device name for the SD card

First, find out what is the device name for the SD card.

Insert the SD Card in the slot.

Run the command:

```
$ sudo fdisk -l
```

Find your device name, by looking at the sizes.

For example, the output might contain:

```
Disk /dev/mmcblk0: 14.9 GiB, 15931539456 bytes, 31116288 sectors
Units: sectors of 1 * 512 = 512 bytes
Sector size (logical/physical): 512 bytes / 512 bytes
I/O size (minimum/optimal): 512 bytes / 512 bytes
```

In this case, the device is `/dev/mmcblk0`. That will be the `device` in the next commands.

You may see `/dev/mmcblk0pX` or a couple of similar entries for each partition on the card, where `X` is the partition number. If you don't see anything like that, take out the SD card and run the command again and see what disappeared.

## 2) Unmount partitions

Before proceeding, unmount all partitions.

Run `df -h`. If there are partitions like `/dev/mmcblk0p1`, then unmount each of them. For example:

```
 $ sudo umount /dev/mmcblk0p1  
$ sudo umount /dev/mmcblk0p2
```

## 3) Burn the image

Now that you know that the device is `device`, you can burn the image to disk.

Let the image file be `image file`.

Burn the image using the command `dd`:

```
 $ sudo dd of=device if=image file status=progress bs=4M
```

**Note:** Use the name of the device, without partitions. i.e., `/dev/mmcblk0`, not `/dev/mmcblk0pX`.

### 93.3. How to shrink an image

Requires:

- An image file to burn.
- An Ubuntu computer.

Results:

- A shrunk image.

**Note:** Majority of content taken from [here](#)

We are going to use the tool `gparted` so make sure it's installed

```
 $ sudo apt install gparted
```

Let the image file be `image file`. Run the command:

```
 $ sudo fdisk -l image file
```

It should give you something like:

Device	Boot	Start	End	Sectors	Size	Id	Type
duckiebot-RPI3-LP-aug15.img1		2048	131071	129024	63M	c	W95 FAT32 (LBA)
duckiebot-RPI3-LP-aug15.img2		131072	21219327	21088256	10.1G	83	Linux

Take note of the start of the Linux partition (in our case 131072), let's call it `start`. Now

we are going to mount the Linux partition from the image:

```
 $ sudo losetup /dev/loop0 imagename.img -o $(($start*512))
```

and then run `gparted`:

```
 $ sudo gparted /dev/loop0
```

In `gparted` click on the partition and click “Resize” under the “Partition” menu. Resize drag the arrow or enter a size that is equal to the minimum size plus 20MB

**Note:** This didn't work well for me - I had to add much more than 20MB for it to work. Click the “Apply” check mark. *Before* closing the final screen click through the arrows in the dialogue box to find a line such a “`resize2fs -p /dev/loop0 1410048K`”. Take note of the new size of your partition. Let's call it `new size`.

Now remove the loopback on the second partition and setup a loopback on the whole image and run `fdisk`:

```
 $ sudo losetup -d /dev/loop0  
$ sudo losetup /dev/loop0 image file  
$ sudo fdisk /dev/loop0

Command (m for help): enter d  

Partition number (1,2, default 2): enter 2  

Command (m for help): enter n  

Partition type  

p primary (1 primary, 0 extended, 3 free)  

e extended (container for logical partitions)  

Select (default p): enter p  

Partition number (2-4, default 2): enter 2  

First sector (131072-62521343, default 131072): start  

Last sector, +sectors or +size{K,M,G,T,P} (131072-62521343, default 62521343): +new sizeK
```

**Note:** on the last line include the `+` and the `K` as part of the size.

```
Created a new partition 2 of type 'Linux' and of size 10.1 GiB.
```

```
Command (m for help): enter w  

The partition table has been altered.  

Calling ioctl() to re-read partition table.  

Re-reading the partition table failed.: Invalid argument
```

```
The kernel still uses the old table. The new table will be used at the next reboot or after  

you run partprobe(8) or kpartx(8).
```

Disregard the final error.

Your partition has now been resized and the partition table has been updated. Now we will remove the loopback and then truncate the end of the image file:

```
 $ fdisk -l /dev/loop0
```

Device	Boot	Start	End	Sectors	Size	Id	Type
/dev/loop0p1		2048	131071	129024	63M	c	W95 FAT32 (LBA)
/dev/loop0p2		131072	21219327	21088256	10.1G	83	Linux

Note down the end of the second partition (in this case 21219327). Call this `end`.

```
💻 $ sudo losetup -d /dev/loop0  
$ sudo truncate -s $(((end+1)*512)) image file
```

You now have a shrunken image file. A further idea is to compress it:

```
💻 $ xz image file
```

## CHAPTER 94

# Networking tools



Assigned to: Andrea

Preliminary reading:

- Basics of networking, including
  - what are IP addresses
  - what are subnets
  - how DNS works
  - how .local names work
  - ...

→ (ref to find).

Make sure that you know:

### 94.1. hostname



### 94.2. Visualizing information about the network



1) ping: are you there?



2) ifconfig



```
$ ifconfig
```

# CHAPTER 95

## Accessing computers using SSH

Assigned to: Andrea

### 95.1. Background reading

- Encryption
- Public key authentication

### 95.2. Installation of SSH

This installs the client:

```
$ sudo apt install ssh
```

This installs the server:

This enables the server:

### 95.3. Local configuration

The SSH configuration as a client is in the file

```
~/.ssh/config
```

Create the directory with the right permissions:

```
$ mkdir ~/.ssh  
$ chmod 0700 ~/.ssh
```

Then add the following lines:

```
HostKeyAlgorithms ssh-rsa
```

The reason is that Paramiko, used by `roslaunch`, does not support the ECDSA keys.

### 95.4. How to login with SSH and a password

To log in to a remote computer `remote` with user `remote-user`, use:

```
$ ssh remote-user@remote
```

#### 1) Troubleshooting

Symptom: “Offending key error”.

If you get something like this:

Warning: the ECDSA host key for ... differs from the key for the IP address '...' '

Offending key for IP in /home/**user**/.ssh/known\_hosts:**line**

then remove line **line** in `~/.ssh/known_hosts`.

## 95.5. Creating an SSH keypair



This is a step that you will repeat twice: once on the Duckiebot, and once on your laptop.

The program will prompt you for the filename on which to save the file.

Use the convention

```
/home/username/.ssh/usernamehost name  
/home/username/.ssh/usernamehost name.pub
```

where:

- **username** is the current user name that you are using (`ubuntu` or your chosen one);
- **host name** is the name of the host (the Duckiebot or laptop);

An SSH key can be generated with the command:

```
$ ssh-keygen -h
```

The session output will look something like this:

```
Generating public/private rsa key pair.  
Enter file in which to save the key (/home/username/.ssh/id_rsa):
```

At this point, tell it to choose this file:

```
/home/username/.ssh/usernamehost name
```

Then:

```
Enter passphrase (empty for no passphrase):
```

Press enter; you want an empty passphrase.

```
Enter same passphrase again:
```

Press enter.

```
Your identification has been saved in /home/username/.ssh/username@host name
Your public key has been saved in /home/username/.ssh/username@host name.pub
The key fingerprint is:
XX:XX:XX:XX:XX:XX:XX:XX:XX:XX:XX:XX:XX:XX:XX:XX username@host name
The key's randomart image is:
+--[ RSA 2048]----+
|          .   |
|         o  o . |
|        o = o . o |
|       B .. * o |
|       S o     0 |
|       o o   . E |
|       o o   o   |
|       o +   |   |
|      ...  |   |
+-----+
```

Note that the program created two files.

The file that contains the private key is

```
/home/username/.ssh/username@host name
```

The file that contains the public key has extension **.pub**:

```
/home/username/.ssh/username@host name.pub
```

Next, tell SSH that you want to use this key.

Make sure that the file `~/.ssh/config` exists:

```
$ touch ~/.ssh/config
```

Add a line containing

```
IdentityFile PRIVATE_KEY_FILE
```

(using the filename for the private key).

Check that the config file is correct:

```
$ cat ~/.ssh/config
...
IdentityFile PRIVATE_KEY_FILE
...
```

## 95.6. How to login without a password

Assumptions:

- You have two computers, called “`local`” and “`remote`”, with users “`local-user`” and “`remote-user`”.
- The two computers are on the same network.

- You have created a keypair for `local-user` on `local`.
  - This procedure is described in Section 95.5.

Results:

- From the `local` computer, `local-user` will be able to log in to `remote` computer without a password.

First, connect the two computers to the same network, and make sure that you can ping `remote` from `local`:

```
local $ ping remote.local
```

Do not continue if you cannot do this successfully.

If you have created a keypair for `local-user`, you will have a public key in this file on the `local` computer:

```
/home/local-user/.ssh/local-user@local.pub
```

This file is in the form:

```
ssh-rsa long list of letters and numbers local-user@local
```

You will have to copy the contents of this file on the `remote` computer, to tell it that this key is authorized.

On the `remote` computer, edit or create the file:

```
/home/remote-user/.ssh/authorized_keys
```

and add the entire line as above containing the public key.

Now, from the `local` computer, try to log in into the `remote` one:

```
local $ ssh remote-user@remote
```

This should succeed, and you should not be asked for a password.

## 95.7. Fixing SSH Permissions

Sometimes, SSH does not work because you have the wrong permissions on some files.

In doubt, these lines fix the permissions for your `.ssh` directory.

```
$ chmod 0700 ~/.ssh
$ chmod 0700 ~/.ssh/*
```

## 95.8. ssh-keygen

# CHAPTER 96

## Wireless networking in Linux

### 96.1. iwconfig

### 96.2. iwlist

#### 1) Getting a list of WiFi networks

---

What wireless networks do I have around?

```
$ sudo iwlist interface scan | grep SSID
```

#### 2) Do I have 5 GHz?

---

Does the interface support 5 GHz channels?

```
$ sudo iwlist interface freq
```

Example output:

```
wlx74da38c9caa0 20 channels in total; available frequencies :  
Channel 01 : 2.412 GHz  
Channel 02 : 2.417 GHz  
Channel 03 : 2.422 GHz  
Channel 04 : 2.427 GHz  
Channel 05 : 2.432 GHz  
Channel 06 : 2.437 GHz  
Channel 07 : 2.442 GHz  
Channel 08 : 2.447 GHz  
Channel 09 : 2.452 GHz  
Channel 10 : 2.457 GHz  
Channel 11 : 2.462 GHz  
Channel 36 : 5.18 GHz  
Channel 40 : 5.2 GHz  
Channel 44 : 5.22 GHz  
Channel 48 : 5.24 GHz  
Channel 149 : 5.745 GHz  
Channel 153 : 5.765 GHz  
Channel 157 : 5.785 GHz  
Channel 161 : 5.805 GHz  
Channel 165 : 5.825 GHz  
Current Frequency:2.437 GHz (Channel 6)
```

Note that in this example only *some* 5Ghz channels are supported (36, 40, 44, 48, 149, 153, 157, 161, 165); for example, channel 38, 42, 50 are not supported. This means that you need to set up the router not to use those channels.

## CHAPTER 97

# Moving files between computers

### 97.1. SCP

- 1) Download a file with SCP
- 

### 97.2. RSync

# CHAPTER 98

## VIM

Assigned to: Andrea

To do quick changes to files, especially when logged remotely, we suggest you use the VI editor, or more precisely, VIM (“VI iMproved”).

### 98.1. External documentation

→ [A VIM tutorial.](#)

### 98.2. Installation

Install like this:

```
$ sudo apt install vim
```

### 98.3. vi

### 98.4. Suggested configuration

Suggested `~/.vimrc`:

```
syntax on
set number
filetype plugin indent on
highlight Comment ctermfg=Gray
autocmd FileType python set complete isk+=.,(
```

### 98.5. Visual mode

### 98.6. Indenting using VIM

Use the `>` command to indent.

To indent 5 lines, use `5 > >`.

To mark a block of lines and indent it, use `v`.

For example, use `v j j >` to indent 3 lines.

Use `<` to dedent.

CHAPTER 99  
**Atom**

• •

## CHAPTER 100

### Eclipse

..

#### 100.1. Installing LiClipse

..

# CHAPTER 101

## Byobu

Assigned to: Andrea

You need to learn to use Byobu. It will save you much time later.  
(Alternatives such as [GNU Screen](#) are fine as well.)

### 101.1. Advantages of using Byobu

### 101.2. Installation

On Ubuntu, install using:

```
$ sudo apt install byobu
```

### 101.3. Documentation

\* See the screencast on the website <http://byobu.co/>.

### 101.4. Quick command reference

You can change the escape sequence from [Ctrl](#)-[A](#) to something else by using the configuration tool that appears when you type [F9](#).

Commands to use windows:

TABLE 12. WINDOWS

	Using function keys	Using escape sequences
Create new window	<a href="#">F2</a>	<a href="#">Ctrl</a> - <a href="#">A</a> then <a href="#">C</a>
Previous window	<a href="#">F3</a>	
Next window	<a href="#">F4</a>	
Switch to window		<a href="#">Ctrl</a> - <a href="#">A</a> then a number
Close window	<a href="#">F6</a>	
Rename window		<a href="#">Ctrl</a> - <a href="#">A</a> then <a href="#">,</a>

Commands to use panes (windows split in two or more):

TABLE 13. COMMANDS FOR PANES

	Using function keys	Using escape sequences
Split horizontally	<a href="#">Shift</a> - <a href="#">F2</a>	<a href="#">Ctrl</a> - <a href="#">A</a> then <a href="#">I</a>
Split vertically	<a href="#">Ctrl</a> - <a href="#">F2</a>	<a href="#">Ctrl</a> - <a href="#">A</a> then <a href="#">%</a>
Switch focus among panes	<a href="#">Ctrl</a> - <a href="#">↑↓↔</a>	<a href="#">Ctrl</a> - <a href="#">A</a> then one of <a href="#">↑↓↔</a>
Break pane		<a href="#">Ctrl</a> - <a href="#">A</a> then <a href="#">!</a>

Other commands:

TABLE 14. OTHER

Using function keys	Using escape sequences
Help	[ <b>Ctrl</b> - <b>A</b> ] then [?]
Detach	[ <b>Ctrl</b> - <b>A</b> ] then [D]

### 101.5. Commands on OS X

Scroll up and down using [**fn**] [**option**] [**↑**] and [**fn**] [**option**] [**↓**].

Highlight using [**alt**]



## CHAPTER 102

# Source code control with Git



Assigned to: Andrea

### 102.1. Background reading



- Git
- GitFlow

### 102.2. Installation



The basic Git program is installed using

```
$ sudo apt install git
```

Additional utilities for `git` are installed using:

```
$ sudo apt install git-extras
```

This include the `git-ignore` utility.

### 102.3. Setting up global configurations for Git



This should be done twice, once on the laptop, and later, on the robot.

These options tell Git who you are:

```
$ git config --global user.email "email"
$ git config --global user.name "full name"
```

Also do this, and it doesn't matter if you don't know what it is:

```
$ git config --global push.default simple
```

### 102.4. Git tips



#### 1) Shallow clone




---

You can clone without history with the command:

```
$ git clone --depth 1 repository URL
```

### 102.5. Git troubleshooting



---

### 1) Problem 1: https instead of ssh:

The symptom is:

```
$ git push  
Username for 'https://github.com':
```

Diagnosis: the `remote` is not correct.

If you do `git remote` you get entries with `https`:

```
$ git remote -v  
origin  https://github.com/duckietown/Software.git (fetch)  
origin  https://github.com/duckietown/Software.git (push)
```

Expectation:

```
$ git remote -v  
origin  git@github.com:duckietown/Software.git (fetch)  
origin  git@github.com:duckietown/Software.git (push)
```

Solution:

```
$ git remote remove origin  
$ git remote add origin git@github.com:duckietown/Software.git
```

---

### 2) Problem 1: `git push` complains about upstream

The symptom is:

```
fatal: The current branch branch name has no upstream branch.
```

Solution:

```
$ git push --set-upstream origin branch name
```

## 102.6. `git`

## CHAPTER 103

# Git LFS



This describes Git LFS.

### 103.1. Generic installation instructions



See instructions at:

<https://git-lfs.github.com/>

### 103.2. Ubuntu 16 installation (laptop)



Following [these instructions](#), run the following:

```
$ sudo add-apt-repository ppa:git-core/ppa  
$ curl -s https://packagecloud.io/install/repositories/github/git-lfs/script.deb.sh | sudo bash  
$ sudo apt update  
$ sudo apt install git-lfs
```

### 103.3. Ubuntu 16 Mate installation (Raspberry Pi 3)



**Note:** unresolved issues.

The instructions above do not work.

Following [this](#), the error that appears is that golang on the Pi is 1.6 instead it should be 1.7.

#### 1) Troubleshooting



**Symptom:** The binaries are not installed.

If you have installed LFS after pulling the repository and you see only the pointer files, do:

```
$ git lfs pull --all
```

# CHAPTER 104

## Setup Github access

Assigned to: Andrea

This chapter describes how to create a Github account and setup SSH on the robot and on the laptop.

### 104.1. Create a Github account

Our example account is the following:

```
Github name: greta-p  
E-mail: greta-p@duckietown.com
```

Create a Github account ([Figure 36](#)).




Figure 36

Go to your inbox and verify the email.

### 104.2. Become a member of the Duckietown organization

Give the administrators your account name. They will invite you.

Accept the invitation to join the organization that you will find in your email.

### 104.3. Add a public key to Github

You will do this procedure twice: once for the public key created on the laptop, and later with the public key created on the robot.

Requires:

- A public/private keypair already created and configured.
  - This procedure is explained in [Section 95.5](#).

Result:

- You can access Github using the key provided.

Go to settings ([Figure 37](#)).

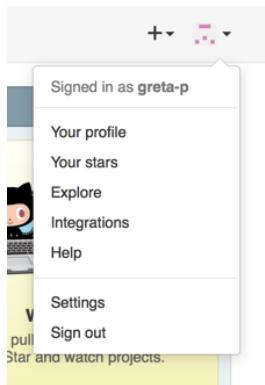


Figure 37

Add the public key that you created:



Figure 38




Figure 39



Figure 40

To check that all of this works, use the command

```
$ ssh -T git@github.com
```

The command tries to connect to Github using the private keys that you specified. This is the expected output:

```
Warning: Permanently added the RSA host key for IP address 'ip address' to the list of known hosts.
```

```
Hi username! You've successfully authenticated, but GitHub does not provide shell access.
```

If you don't see the greeting, stop.

Repeat what you just did for the Duckiebot on the laptop as well, making sure to change the name of the file containing the private key.

## PART 9

# Duckietown development guide



This part is about how to develop software for the Duckiebot.

# CHAPTER 105

## Configuration

This chapter explains what are the assumptions about the configuration.

While the “Setup” parts are “imperative” (do this, do that); this is the “declarative” part, which explains what are the properties of a correct configuration (but it does not explain how to get there).

*\* The tool `what-the-duck` checks these conditions (Chapter 106). If you make a change from the existing conditions, make sure that it gets implemented in `what-the-duck` by filing an issue.*

### 105.1. Environment variables

You need to have set up the variables in [Table 15](#).

TABLE 15. ENVIRONMENT VARIABLES USED BY THE SOFTWARE

variable	reasonable value	contains
DUCKIETOWN_ROOT	~/duckietown	Software repository
DUCKIEFLEET_ROOT	~/duckiefleet	A repository that contains <code>scuderia.yaml</code> and other team-specific configuration.

1) Duckietown root directory DUCKIETOWN\_ROOT

2) Duckiefleet directory DUCKIEFLEET\_ROOT

For Fall 2017, this is the the repository [duckiefleet-fall2017](#).

For self-guided learners, this is an arbitrary repository to create.

### 105.2. The scuderia file

In the  `${DUCKIEFLEET_ROOT}`  directory, there needs to exist a file called:

`${DUCKIEFLEET_ROOT}/scuderia.yaml`

The file must contain YAML entries of the type:

```
robot-name:
  username: username
  owner_duckietown_id: owner duckietown ID
```

A minimal example is in [Listing 4](#).

```
emma:
  username: andrea
  owner_duckietown_id: censi
```

[Listing 4. Minimal scuderia file](#)

Explanations of the fields:

- `robot_name`: the name of the robot, also equal to the host name.
- `username`: the name of the Linux user on the robot, from which to run programs.
- `owner_duckietown_id`: the owner's globally-unique Duckietown ID.

### 105.3. The `machines` file

The `machines` file is created using:

```
$ rosrun duckietown create-machines-file
```

### 105.4. People database

Assigned to: Andrea

#### 1) The globally-unique Duckietown ID

---

This is a globally-unique ID for people in the Duckietown project.

It is equal to the Slack username.

## CHAPTER 106

# What the duck!



`what-the-duck` is a program that tests *dozens* of configuration inconsistencies that can happen on a Duckiebot.

To use it, first compile the repository, and then run:

```
$ ./what-the-duck
```

### 106.1. Adding more tests to `what-the-duck`



The idea is to add to `what-the-duck` all the tests that can be automated.

The documentation about to do that is not ready yet.

### 106.2. Tests already added



Here's the list of tests already added:

- ✓ Camera is detected
- ✓ Scipy is installed
- ✓ sklearn is installed
- ✓ Date is set correctly
- ✓ Not running as root
- ✓ Not running as ubuntu
- ✓ Member of group sudo
- ✓ Member of group input
- ✓ Member of group video
- ✓ Member of group i2c
- ✓ ~/.ssh exists
- ✓ ~/.ssh permissions
- ✓ ~/.ssh/config exists
- ✓ SSH option HostKeyAlgorithms is set
- ✓ At least one key is configured.
- ✓ ~/.ssh/authorized\_keys exists
- ✓ Git configured
- ✓ Git email set
- ✓ Git name set
- ✓ Git push policy set
- ✓ Edimax detected
- ✓ The hostname is configured
- ✓ /etc/hosts is sane
- ✓ Correct kernel version
- ✓ Messages are compiled
- ✓ Shell is bash
- ✓ Working internet connection
- ✓ Github configured
- ✓ Joystick detected
- ✓ Environment variable DUCKIETOWN\_ROOT
- ✓ \${DUCKIETOWN\_ROOT} exists
- ✓ Environment variable DUCKIETOWN\_FLEET
- ✓ \${DUCKIETOWN\_FLEET} exists
- ✓ \${DUCKIETOWN\_FLEET}/scuderia.yaml exists
- ✓ \${DUCKIETOWN\_FLEET}/scuderia.yaml is valid
- ✓ machines file is valid
- ✓ Wifi network configured
- ✓ Python: No CamelCase
- ✓ Python: No tab chars
- ✓ Python: No half merges

### 106.3. List of tests to add

Please add below any configuration test that can be automated:

- Editor is set to vim.
- They put the right MAC address in the network configuration
- Ubuntu user is in group video, input, i2c (even if run from other user.)
- There is at least X.YGB of free disk space.
- If the SD is larger than 8GB, the disk has been resized.

- Done `sudo rosdep init`

## CHAPTER 107

# Python

### 107.1. Background reading

- Python
- Python tutorial

### 107.2. Python virtual environments

Install using:

```
$ sudo apt install virtualenv
```

### 107.3. Useful libraries

```
matplotlib  
seaborn  
numpy  
panda  
scipy  
opencv  
...
```

## CHAPTER 108

# Introduction to ROS



Assigned to: Liam

### 108.1. Install ROS



This part installs ROS. You will run this twice, once on the laptop, once on the robot. The first commands are copied from [this page](#).

Tell Ubuntu where to find ROS:

```
$ sudo sh -c 'echo "deb http://packages.ros.org/ros/ubuntu $(lsb_release -sc) main" > /etc/apt/sources.list.d/ros-latest.list'
```

Tell Ubuntu that you trust the ROS people (they are nice folks):

```
$ sudo apt-key adv --keyserver hkp://ha.pool.sks-keyservers.net:80 --recv-key 421C365BD9FF1F717815A3895523BAEEB01FA116
```

Fetch the ROS repo:

```
$ sudo apt update
```

Now install the mega-package `ros-kinetic-desktop-full`.

```
$ sudo apt install ros-kinetic-desktop-full
```

There's more to install:

```
$ sudo apt install  
ros-kinetic-{tf-conversions,cv-bridge,image-transport,camera-info-manager,theora-image-transport,joy,image-proc,...
```

**Note:** Do not install packages by the name of `ros-X`, only those by the name of `ros-kinetic-X`. The packages `ros-X` are from another version of ROS.

: not done in aug20 image:

Initialize ROS:

```
$ sudo rosdep init  
$ rosdep update
```

### 108.2. rqt\_console



### 108.3. roslaunch



**108.4. rviz****108.5. rostopic**1) `rostopic hz`2) `rostopic echo`**108.6. catkin\_make****108.7. rosrun****108.8. rostest****108.9. rospack****108.10. rosparam****108.11. rosdep****108.12. Troubleshooting ROS****Symptom:** `computer` is not in your SSH `known_hosts` fileSee [this thread](#). Remove the `known_hosts` file and make sure you have followed the instructions in [Section 95.3](#).

## CHAPTER 109

# How to create a ROS package

### 109.1. Conforming ROS package checklist

- The name of the package is `package_handle`
- The directory is in ...
- The messages are called ....
- there is a readme file
- there is the first launch file

# CHAPTER 110

## Integrate package in the architecture

..

## CHAPTER 111

# Creating unit tests

A small cluster of three small blue decorative icons.

# CHAPTER 112

## Duckietown code conventions

### 112.1. Python

Never use tabs in the file.

Indentation is 4 spaces.

Lines should be below 90 characters.

All files have an encoding declared.

Executable files start with:

```
#!/usr/bin/env python
```

Comments refer to the next line.

Comments, bad:

```
from std_msgs.msg import String # This is my long comment
```

Comments, better:

```
# This is my long comment  
from std_msgs.msg import String
```

## CHAPTER 113

### Minimal ROS node - `pkg_name`

Assigned to: Andrea

This document outline the process of writing a ROS package and nodes in Python. To follow along, it is recommend that you duplicate the `pkg_name` folder and edit the content of the files to make your own package.

#### 113.1. The files in the package

##### 1) `CMakeLists.txt`

We start with `CMakeLists.txt`.

Every ROS package needs a file `CMakeLists.txt`, even if you are just using Python code in your package.

*\* documentation about `CMakeLists.txt`*

For a Python package, you only have to pay attention to the following parts.

The line:

```
project(pkg_name)
```

defines the name of the project.

The `find_package` lines:

```
find_package(catkin REQUIRED COMPONENTS
  roscpp
  rospy
  duckietown_msgs # Every duckietown packages must use this.
  std_msgs
)
```

You will have to specify the packages on which your package is dependent.

In Duckietown, most packages depend on `duckietown_msgs` to make use of the customized messages.

The line:

```
catkin_python_setup()
```

tells `catkin` to setup Python-related stuff for this package.

*\* ROS documentation about `setup.py`*

---

##### 2) `package.xml`

The file `package.xml` defines the meta data of the package.

Catkin makes use of it to flush out the dependency tree and figures out the order of compiling.

Pay attention to the following parts.

`<name>` defines the name of the package. It has to match the project name in `CMakeLists.txt`.

`<description>` describes the package concisely.

`<maintainer>` provides information of the maintainer.

`<build_depend>` and `<run_depend>`. The catkin packages this package depends on. This usually match the `find_package` in `CMakeLists.txt`.

### 3) `setup.py`

The file `setup.py` configures the Python modules in this package.

The part to pay attention to is

```
setup_args = generate_distutils_setup(  
    packages=['pkg_name'],  
    package_dir={'': 'include'},  
)
```

The `packages` parameter is set to a list of strings of the name of the folders inside the `include` folder.

The convention is to set the folder name the same as the package name. Here it's the `include/pkg_name` folder.

You should put ROS-independent and/or reusable module (for other packages) in the `include/pkg_name` folder.

Python files in this folder (for example, the `util.py`) will be available to scripts in the `catkin` workspace (this package and other packages too).

To use these modules from other packages, use:

```
from pkg_name.util import *
```

## 113.2. Writing a node: `talker.py`

Let's look at `src/talker.py` as an example.

ROS nodes are put under the `src` folder and they have to be made executable to function properly.

→ You use `chmod` for this; see [Section 88.1](#).

### 1) Header

Header:

```
#!/usr/bin/env python
import rospy
# Imports module. Not limited to modules in this package.
from pkg_name.util import HelloGoodbye
# Imports msg
from std_msgs.msg import String
```

The first line, `#!/usr/bin/env python`, specifies that the script is written in Python.

Every ROS node in Python must start with this line.

The line `import rospy` imports the `rospy` module necessary for all ROS nodes in Python.

The line `from pkg_name.util import HelloGoodbye` imports the class `HelloGoodbye` defined in the file `pkg_name/util.py`.

Note that you can also include modules provided by other packages, if you specify the dependency in `CMakeLists.txt` and `package.xml`.

The line `from std_msgs.msg import String` imports the `String` message defined in the `std_msgs` package.

Note that you can use `rosmsg show std_msgs/String` in a terminal to lookup the definition of `String.msg`.

## 2) Main

---

This is the main file:

```
if __name__ == '__main__':
    # Initialize the node with rospy
    rospy.init_node('talker', anonymous=False)

    # Create the NodeName object
    node = Talker()

    # Setup proper shutdown behavior
    rospy.on_shutdown(node.on_shutdown)

    # Keep it spinning to keep the node alive
    rospy.spin()
```

The line `rospy.init_node('talker', anonymous=False)` initializes a node named `talker`.

Note that this name can be overwritten by a launch file. The launch file can also push this node down namespaces. If the `anonymous` argument is set to `True` then a random string of numbers will be append to the name of the node. Usually we don't use anonymous nodes.

The line `node = Talker()` creates an instance of the `Talker` object. More details in the next section.

The line `rospy.on_shutdown(node.on_shutdown)` ensures that the `node.on_shutdown` will be called when the node is shutdown.

The line `rospy.spin()` blocks to keep the script alive. This makes sure the node stays alive and all the publication/subscriptions work correctly.

### 113.3. The Talker class

We now discuss the `Talker` class in `talker.py`.

#### 1) Constructor

In the constructor, we have:

```
self.node_name = rospy.get_name()
```

saves the name of the node.

This allows to include the name of the node in printouts to make them more informative. For example:

```
rospy.loginfo("[%s] Initializing." % (self.node_name))
```

The line:

```
self.pub_topic_a = rospy.Publisher("~topic_a", String, queue_size=1)
```

defines a publisher which publishes a `String` message to the topic `~topic_a`. Note that the `~` in the name of topic under the namespace of the node. More specifically, this will actually publish to `talker/topic_a` instead of just `topic_a`. The `queue_size` is usually set to 1 on all publishers.

- For more details see [rospy overview: publisher and subscribers](#).

The line:

```
self.sub_topic_b = rospy.Subscriber("~topic_b", String, self.cbTopic)
```

defines a subscriber which expects a `String` message and subscribes to `~topic_b`. The message will be handled by the `self.cbTopic` callback function. Note that similar to the publisher, the `~` in the topic name puts the topic under the namespace of the node. In this case the subscriber actually subscribes to the topic `talker/topic_b`.

It is strongly encouraged that a node always publishes and subscribes to topics under their `node_name` namespace. In other words, always put a `~` in front of the topic names when you define a publisher or a subscriber. They can be easily remapped in a launch file. This makes the node more modular and minimizes the possibility of confusion and naming conflicts. See [the launch file section][howto-launch-file] for how remapping works.

The line

```
self.pub_timestep = self.setupParameter("~pub_timestep", 1.0)
```

Sets the value of `self.pub_timestep` to the value of the parameter `~pub_timestep`. If the parameter doesn't exist (not set in the launch file), then set it to the default value `1.0`. The `setupParameter` function also writes the final value to the parameter server. This means that you can `rosparam list` in a terminal to check the actual values of parameters being set.

The line:

```
self.timer = rospy.Timer(rospy.Duration.from_sec(self.pub_timestep), self.cbTimer)
```

defines a timer that calls the `self.cbTimer` function every `self.pub_timestep` seconds.

## 2) Timer callback

Contents:

```
def cbTimer(self,event):
    singer = HelloGoodbye()
    # Simulate hearing something
    msg = String()
    msg.data = singer.sing("duckietown")
    self.pub_topic_name.publish(msg)
```

Everyt ime the timer ticks, a message is generated and published.

## 3) Subscriber callback

Contents:

```
def cbTopic(self,msg):
    rospy.loginfo("[%(node_name)s] %(msg.data)s" %{'node_name':self.node_name,'msg':msg})
```

Every time a message is published to `~topic_b`, the `cbTopic` function is called. It simply prints the messae using `rospy.loginfo`.

## 113.4. Launch File

You should always write a launch file to launch a node. It also serves as a documentation on the I/O of the node.

Let's take a look at `launch/test.launch`.

```
<launch>
  <node name="talker" pkg="PKG_NAME" type="talker.py" output="screen">

    <param name="~pub_timestep" value="0.5"/>

    <remap from="~topic_b" to="~topic_a"/>
  </node>
</launch>
```

For the `<node>`, the `name` specify the name of the node, which overwrites `rospy.init_node()` in the `__main__` of `talker.py`. The `pkg` and `type` specify the package and the script of the node, in this case it's `talker.py`.

Don't forget the `.py` in the end (and remember to make the file executable through `chmod`).

The `output="screen"` direct all the `rospy.loginfo` to the screen, without this you won't see any printouts (useful when you want to suppress a node that's too talkative.)

The `<param>` can be used to set the parameters. Here we set the `~pub_timestep` to `0.5`. Note

that in this case this sets the value of `talker/pub_timestep` to `0.5`.

The `<remap>` is used to remap the topic names. In this case we are replacing `~topic_b` with `~topic_a` so that the subscriber of the node actually listens to its own publisher. Replace the line with

```
<remap from="~topic_b" to="talker/topic_a"/>
```

will have the same effect. This is redundant in this case but very useful when you want to subscribe to a topic published by another node.

### 113.5. Testing the node

First of all, you have to `catkin_make` the package even if it only uses Python. `catkin` makes sure that the modules in the include folder and the messages are available to the whole workspace. You can do so by

```
$ cd ${DUCKIETOWN_ROOT}/catkin_ws  
$ catkin_make
```

Ask ROS to re-index the packages so that you can auto-complete most things.

```
$ rospack profile
```

Now you can launch the node by the launch file.

```
$ rosrun pkg_name test.launch
```

You should see something like this in the terminal:

```
... logging to /home/username/.ros/log/d4db7c80-b272-11e5-8800-5c514fb7f0ed/roslaunch-robot
name-15961.log
Checking log directory for disk usage. This may take awhile.
Press Ctrl-C to interrupt
Done checking log file disk usage. Usage is 1GB.

started roslaunch server http://robot name.local:33925/

SUMMARY
=====

PARAMETERS
* /rosdistro: $ROS_DISTRO
* /rosversion: 1.11.16
* /talker/pub_timestep: 0.5

NODES
/
    talker (pkg_name/talker.py)

auto-starting new master
process[master]: started with pid [15973]
ROS_MASTER_URI=http://localhost:11311

setting /run_id to d4db7c80-b272-11e5-8800-5c514fb7f0ed
process[rosout-1]: started with pid [15986]
started core service [/rosout]
process[talker-2]: started with pid [15993]
[INFO] [WallTime: 1451864197.775356] [/talker] Initialzing.
[INFO] [WallTime: 1451864197.780158] [/talker] ~pub_timestep = 0.5
[INFO] [WallTime: 1451864197.780616] [/talker] Initialzed.
[INFO] [WallTime: 1451864198.281477] [/talker] Goodbye, duckietown.
[INFO] [WallTime: 1451864198.781445] [/talker] Hello, duckietown.
[INFO] [WallTime: 1451864199.281871] [/talker] Goodbye, duckietown.
[INFO] [WallTime: 1451864199.781486] [/talker] Hello, duckietown.
[INFO] [WallTime: 1451864200.281545] [/talker] Goodbye, duckietown.
[INFO] [WallTime: 1451864200.781453] [/talker] Goodbye, duckietown.
```

Open another terminal and run:

```
$ rostopic list
```

You should see

```
/rosout
/rosout_agg
/talker/topic_a
```

In the same terminal, run:

```
$ rosparam list
```

You should see the list of parameters, including `/talker/pub_timestep`.  
You can see the parameters and the values of the `talker` node with

```
$ rosparam get /talker
```

## 113.6. Documentation

You should document the parameters and the publish/subscribe topic names of each node in your package. The user should not have to look at the source code to figure out how to use the nodes.

## 113.7. Guidelines

- Make sure to put all topics (publish or subscribe) and parameters under the name-space of the node with `~`. This makes sure that the IO of the node is crystal clear.
- Always include the name of the node in the printouts.
- Always provide a launch file that includes all the parameters (using `<param>`) and topics (using `<remap>`) with each node.

**CHAPTER 114****Duckietown Software architecture**

## PART 10

### Fall 2017



This is the first time that a class is taught jointly across 3 continents!

There are 4 universities involved in the joint teaching for the term:

- ETH Zürich (ETHZ), with instructors Emilio Frazzoli, Andrea Censi, Jacopo Tani.
- University of Montreal (UdeM), with instructor Liam Paull.
- TTI-Chicago (TTIC), with instructor Matthew Walter.
- National CT University (NCTU), with instructor Nick Wang.

This part of the Duckiebook describes all the information that is needed by the students of the four institutions.

## CHAPTER 115

### General remarks



Assigned to: Andrea

#### **115.1. The rules of Duckietown**



##### **The first rule of Duckietown**

The first rule of Duckietown is: you don't talk about Duckietown, *using email*.

Instead, we use a communication platform called Slack.

There is one exception: inquiries about "meta" level issues, such as course enrollment and other official bureaucratic issues can be communicated via email.

##### **The second rule of Duckietown**

The second rule of Duckietown is: be kind and respectful, and have fun.

##### **The third rule of Duckietown**

The third rule of Duckietown is: read the instructions carefully.

Do not blindly copy and paste.

Only run a command if you know what it does.

#### **115.2. Synchronization between classes**



At ETHZ, UdeM, TTIC, the class will be more-or-less synchronized. The materials are the same; there is some slight variation in the ordering.

Moreover, there will be some common groups for the projects.

The NCTU class is undergraduate level. Students will learn slightly simplified materials. They will not collaborate directly with the classes.

#### **115.3. Accounts for students**



To participate in Duckietown, students must use two accounts: Slack and Github.

##### **1) Slack**

---

You need a Slack account, for team discussion and organization.



##### **2) Github**



- A Github account;
- Membership in the Duckietown organization.

#### **115.4. Accounts for all instructors and TAs**



As an instructor/TA for the Fall 2017 class, in addition to the accounts above, these are two more accounts that you need.

---

**1) Twist**

Twist is used for class organization (such as TAs, logistics);

TODO:

---

**2) Google docs**

Google Docs is used to maintain TODOs and other coordination materials.

In particular:

- This is the schedule: XXX
- This is the calendar in which to annotate everything: XXX

**CHAPTER 116****Additional information for ETH Zürich students**

Assigned to: Andrea

This section describes information specific for ETH Zürich students.

1) Website



All really important information, such as deadlines, is in the authoritative website:

2) Duckiebox distribution



3) Lab access



4) The local TAs



CHAPTER 117

## Additional information for UdeM students



| Assigned to: Liam

## CHAPTER 118

### Additional information for TTIC students



| Assigned to: Matt

CHAPTER 119

## Additional information for NCTU students

..

| Assigned to: Nick

## CHAPTER 120

**Milestone: ROS node working**

CHAPTER 121

Homework: Take and process a log

..

CHAPTER 122

Milestone: Calibrated robot



CHAPTER 123

Homework: Camera geometry

..

## CHAPTER 124

## Milestone: Illumination invariance



CHAPTER 125

Homework: Place recognition

..

**CHAPTER 126****Milestone: Lane following**

` ^

CHAPTER 127  
Homework: localization

..

CHAPTER 128

Milestone: Navigation



CHAPTER 129

Homework: group forming

..

CHAPTER 130  
Milestone: Ducks in a row

• •

CHAPTER 131

Homework: Comparison of PID

..

CHAPTER 132  
Homework: RRT

• •

# CHAPTER 133

## Caffe tutorial

..

CHAPTER 134

Milestone: Object Detection



CHAPTER 135

# Homework: Object Detection

..

**CHAPTER 136****Milestone: Semantic perception**

CHAPTER 137

Homework: Semantic perception

..

CHAPTER 138

# Milestone: Reacting to obstacles

•

CHAPTER 139

Homework: Reacting to obstacles

..

## CHAPTER 140

**Milestone: SLAM demo**

CHAPTER 141  
Homework: SLAM

..

CHAPTER 142

Milestone: fleet demo

•

•

CHAPTER 143  
Homework: fleet

..

CHAPTER 144  
Project proposals

• •

# CHAPTER 145

## Template of a project

### 145.1. Checklist for students

- Have a Github account. See [Chapter 104](#). See name conventions (TODO).
- Be part of the Duckietown Github organization. You are sure only when you commit and push one change to one of our repositories.
- Be part of the Duckietown Slack. See name conventions (TODO).

### 145.2. Checklist for TAs

- Be signed up on

**PART 11**  
**Packages - Infrastructure**

..

CHAPTER 146  
Package duckietown

..

## CHAPTER 147

**Package duckietown\_logs**

Until we fix the dependencies:

```
sudo pip install SystemCmd==1.2 ros_node_utils==1.0 ConfTools==1.8 QuickApp==1.2.2  
sudo apt-get install -y mplayer mencoder  
  
sudo add-apt-repository ppa:mc3man/trusty-media  
sudo apt-get update  
sudo apt-get install -y ffmpeg gstreamer0.10-ffmpeg
```

CHAPTER 148  
Package `duckietown_msgs`

..

## CHAPTER 149

### Package what\_the\_duck



`what-the-duck` is a program that tests *dozens* of configuration inconsistencies that can happen on a Duckiebot.

#### 149.1. What the duck



To use it, first compile the repository, and then run:

```
$ ./what-the-duck
```

#### 149.2. Adding more tests to what-the-duck



The idea is to add to `what-the-duck` all the tests that can be automated.

The documentation about to do that is not ready yet.

#### 149.3. Tests already added



Here is the list of tests already added:

- ✓ Camera is detected
- ✓ Scipy is installed
- ✓ sklearn is installed
- ✓ Date is set correctly
- ✓ Not running as root
- ✓ Not running as ubuntu
- ✓ Member of group sudo
- ✓ Member of group input
- ✓ Member of group video
- ✓ Member of group i2c
- ✓ ~/.ssh exists
- ✓ ~/.ssh permissions
- ✓ ~/.ssh/config exists
- ✓ SSH option HostKeyAlgorithms is set
- ✓ At least one key is configured.
- ✓ ~/.ssh/authorized\_keys exists
- ✓ Git configured
- ✓ Git email set
- ✓ Git name set
- ✓ Git push policy set
- ✓ Edimax detected
- ✓ The hostname is configured
- ✓ /etc/hosts is sane
- ✓ Correct kernel version
- ✓ Messages are compiled
- ✓ Shell is bash
- ✓ Working internet connection
- ✓ Github configured
- ✓ Joystick detected
- ✓ Environment variable DUCKIETOWN\_ROOT
- ✓ \${DUCKIETOWN\_ROOT} exists
- ✓ Environment variable DUCKIETOWN\_FLEET
- ✓ \${DUCKIETOWN\_FLEET} exists
- ✓ \${DUCKIETOWN\_FLEET}/scuderia.yaml exists
- ✓ \${DUCKIETOWN\_FLEET}/scuderia.yaml is valid
- ✓ machines file is valid
- ✓ Wifi network configured
- ✓ Python: No CamelCase
- ✓ Python: No tab chars
- ✓ Python: No half merges

#### 149.4. List of tests to add

Please add below any configuration test that can be automated:

- Editor is set to vim.
- Syntax on in ~/.vimrc
- They put the right MAC address in the network configuration
- Ubuntu user is in group video, input, i2c (even if run from other user.)
- There is at least X.YGB of free disk space.

- If the SD is larger than 8GB, the disk has been resized.

PART 12

## Packages - Lane control

..

## CHAPTER 150

**Package adafruit\_drivers**

` `

CHAPTER 151

Package `anti_instagram`

..

**CHAPTER 152****Package car\_supervisor**

` `

CHAPTER 153  
Package dagu\_car

..

**CHAPTER 154**

Package `ground_projection`



# CHAPTER 155

## Package joy\_mapper

### 155.1. Test

To test run:

- 1) connect joystick
- 2) `roslaunch launch/joy_mapper_test.launch`
- 3) the robot should move when you push buttons

### 155.2. Dependencies

- `rospy`
- `sensor_msgs`: for the `Joy.msg`
- `duckietown_msgs`: for the `CarControl.msg`

### 155.3. Node: joy\_mapper.py

This node takes a `sensor_msgs/Joy.msg` and convert it to a `duckietown_msgs/CarControl.msg`. Publishes at fix interval with a zero order hold.

Parameters:

- `~pub_timestep`: Time steps (in seconds) between publishings of CarControl msgs. Default to 0.02 (50hz)

Subscribe Topics:

- `joy`: `sensor_msgs/Joy.msg` The Joy.msg from a `joy_node` of the `joy` package. The Vertical axis of the left stick maps to speed. The Horizontal axis of the right stick maps to steering.

Publish Topics:

- `~joy_control`: `duckietown_msgs/CarControl.msg`

`CarControl.speed`: [-1,1] Positive is forward speed.

`CarControl.steering`: [-1,1] Positive is steering left.

`CarControl.need_steering`: default to false.

### 155.4. Services

None.

**CHAPTER 156****Package lane\_control**

CHAPTER 157

Package lane\_filter

..

CHAPTER 158  
Package line\_detector

..

CHAPTER 159  
Package `pi_camera`

..

PART 13  
Packages - Indefinite navigation



# CHAPTER 160

## Package fsm

..

## CHAPTER 161

Package `indefinite_navigation`

## CHAPTER 162

### Package intersection\_control

..

CHAPTER 163  
Package navigation

•

•

CHAPTER 164

Package stop\_line\_filter

..

PART 14

Packages - Localization and planning



PART 15

## Packages - Coordination

..

**PART 16****Packages - Additional functionality**

## PART 17

# Packages - Templates

..

These are templates.

## CHAPTER 165

### Package `pkg_name`

The package `pkg_name` is a template for ROS packages.

For the tutorial, see [Chapter 113](#).

#### 165.1. Status

Given an honest assessment of the status of this package.

CHAPTER 166  
Package rostest\_example

..

**PART 18****Packages - Convenience**

`

`

CHAPTER 167  
Package `duckietown_demos`

..

## CHAPTER 168

Package `duckietown_unit_test`

## PART 19

# Packages - To sort



We need to decide where these packages go.

## CHAPTER 169

### Package `adafruit_imu`

#### 169.1. Testing

To test run:

TODO

#### 169.2. Dependencies

- `rospy`
- `sensor_msgs`: for the `Joy.msg`
- `duckietown_msgs`: for the `CarControl.msg`

#### 169.3. Node `adafruit_imu`

This node reads sensor data from adafruit IMU and publishes it to `sensor_msgs.Imu` and `sensor_msgs.MagneticField`.

---

##### 1) Parameters

- `~pub_timestep`: Time steps (in seconds) between publishings of `CarControl` msgs. Default to 0.02 (50 Hz).

---

##### 2) Publish Topics

- `~adafruit_imu`: `sensor_msgs.Imu`

`Imu.angular_velocity`: Vector3 of angular velocity vector.

`Imu.linear_acceleration`: Vector3 of linear acceleration.

- `~adafruit_mag`: `sensor_msgs.MagneticField`

`MagneticField.magnetic_field`: Vector3 of magnetic field.

---

##### 3) Services

None

# CHAPTER 170

## Package apriltags\_ros

..

AprilTags for ROS.

build passing

## CHAPTER 171

Package `duckie_rr_bridge`

## CHAPTER 172

### Package `duckiebot_visualizer`

..

## CHAPTER 173

Package `duckietown_description`

CHAPTER 174

Package bag\_stamper

..

CHAPTER 175  
Package kinematics

•

•

CHAPTER 176  
Package `visual_odometry`

..

## CHAPTER 177

### LED emitter



The coordination team will use 3 signals: CAR\_SIGNAL\_A, CAR\_SIGNAL\_B, CAR\_SIGNAL\_C. To test the LED emitter with your joystick, run the following command:

```
$ roslaunch led_joy_mapper led_joy_with_led_emitter_test.launch veh:=robot name
```

This launches the joy controller, the mapper controller, and the led emitter nodes. You should not need to run anything external for this to work. Use the joystick buttons A, B and C to change your duckiebot's LED's blinking frequency.

Button A broadcasts signal CAR\_SIGNAL\_A (2.8hz), button B broadcasts signal CAR\_SIGNAL\_B (4.1hz), and button CAR\_SIGNAL\_C (Y on the controller) broadcasts signal C(5hz).The LB button will make the LEDs all white, the RB button will make some LEDs blue and some LEDs green, and the logitek button (middle button) will make the LEDs all red

Repeat this for each vehicle at the intersection that you wish to be blinking. Use previous command replacing **robot name** the names of the vehicles and try command different blinking patterns on different duckiebots.

(optional tests) For a grasp of the low level LED emitter, run:

```
$ roslaunch led_emitter led_emitter_node.launch veh:=robot name
```

You can then publish to the topic manually by running the following command in another screen on the duckiebot:

```
$ rostopic pub /robot name/led_emitter_node/change_to_state std_msgs/Float32 float-value
```

Where **float-value** is the desired blinking frequency, e.g. 1.0, .5, 3.0, etc. If you wish to run the LED emitter test, run the following:

```
$ roslaunch led_emitter led_emitter_node_test.launch veh:=robot name
```

This will cycle through frequencies of 3.0hz, 3.5hz, and 4hz every 5 seconds. Once done, kill everything and make sure you have joystick control as described above.

#### 177.1. LED detector



Pick your favourite duckiebot as the observer-bot. Refer to it as **robot name** for this step. If you are in good company, this can be tried on all the available duckiebots. First, activate the camera on the observer-bot:

```
$ roslaunch duckietown camera.launch veh:=robot name
```

In a separate terminal, fire up the LED detector and the custom GUI by running:

```
$ rosrun led_detector LED_detector_with_gui.launch veh:=robot name
```

| **Note:** to operate without a GUI:



```
$ rosrun led_detector LED_detector.launch veh:=robot name
```

The LED\_detector\_node will be launched on the robot, while LED\_visualizer (a simple GUI) will be started on your laptop. Make sure the camera image from the observer-bot is visualized and updated in the visualizer (tip: check that your camera cap is off).

Hit on Detect and wait to trigger a detection. This will not have any effect if LED\_detector\_node is not running on the duckiebot (it is included in the above launch file). After the capture and processing phases, the outcome will look like:

The red numbers represent the frequencies directly inferred from the camera stream, while the selected detections with the associated signaling frequencies will be displayed in green. You can click on the squares to visualize the brightness signals and the Fourier amplitude spectra of the corresponding cells in the video stream. You can also click on the camera image to visualize the variance map.

## 177.2. Unit tests



To run the unit tests for the LED detector, you need to have the F23 rosbags on you hard disk. These bag files should be synced from [this dropbox link] ([https://www.dropbox.com/sh/5kx8qwggttu69fhr/AAASLpOVjV5r1xpzeW7xWZh\\_a?dl=0](https://www.dropbox.com/sh/5kx8qwggttu69fhr/AAASLpOVjV5r1xpzeW7xWZh_a?dl=0)).

For the test to locate the bag files, you should have the DUCKIETOWN\_DATA environment variable set, pointing to the location of you duckietown-data folder. This can be achieved by:

```
$ export DUCKIETOWN_DATA=local-path-to-duckietown-data-folder
```

All the available tests are specified in file `all_tests.yaml` in the scripts/ folder of the package led\_detection in the duckietown ROS workspace. To run these, use the command:

```
$ rosrun led_detection unittests.py algorithm name-of-test
```

Currently, `algorithm` can be either 'baseline' or 'LEDDetector\_plots' to also display the plot in the process. To run all test with all algorithms, execute:

```
$ rosrun led_detection unittests.py '*' '*'
```

CHAPTER 178  
Package led\_detection

..

CHAPTER 179  
Package led\_emitter

..

## CHAPTER 180

## Package led\_interpreter



CHAPTER 181

Package led\_joy\_mapper

..

## CHAPTER 182

### Package `rgb_led`

#### 182.1. Demos

To test the traffic light:

```
$ rosrun rgb_led blink trafficlight4way
```

Fancy test:

```
$ rosrun rgb_led blink trafficlight4way
```

To do other tests:

```
$ rosrun rgb_led blink
```

CHAPTER 183  
Package traffic\_light

..

CHAPTER 184  
Package localization

•

CHAPTER 185  
Package `mdoap`

..

CHAPTER 186  
Package `parallel_autonomy`

..

CHAPTER 187

Package `scene_segmentation`

..

**CHAPTER 188****Package veh\_coordinator**

CHAPTER 189  
Package vehicle\_detection

..

## CHAPTER 190

Package `visual_odometry_line`



## PART 20

# Packages - Failed projects

..

These packages are abandoned failed projects.

## CHAPTER 191

### Package `mouse_encoder`



Use a mouse as encoder. Requires read permission to `/dev/input/mice`.

#### 191.1. Publish Topic



- `mouse_encoder/tick: geometry_msg/Point` message with number of ticks in the x and y direction.

#### 191.2. Parameters



- `~dev_path`: Default to `/dev/input/mice`. Point to the device path of the mouse.

#### 191.3. Getting access to `/dev/input/mice`.



- Create a group named `input`

```
$ sudo groupadd input
```
* Add yourself to the `input` group
```
$ sudo adduser your_user_name input
```

- Log out and log back in for the change to take effect
- Put all devices under `/dev/input/` into the `input` group to grant the group read/write permission. Can be done by adding a file name `99-pure-data.rules` under `/etc/udev/rules.d` with the following line:

```
SUBSYSTEM=="input", GROUP="input", MODE="660"
```

- Reboot for the rule to take effect.

# CHAPTER 192

## Package simcity - Map Editor Version 0.1

All ./ references point to duckietown(Software)/catkin\_ws/src/simcity A good reference for duckietown packages in general is catkin\_ws/src/pkg\_name/howto.md

### 192.1. How to run the map editor

(V0.1)

Inside ./launch is basic\_map\_tiler.launch. Ensure that the map file's path is correct for your machine. We start simcity, given a specific map file. We also start rviz, ROS' common gui.

### 192.2. How to edit the map

(V0.1)

The map is contained in ./maps as a YAML file. map.yaml is a small example of some circular streets, and censi\_map.yaml is the map of the duckietown currently up and running.

### 192.3. What am I looking at, anyway?

(V0.1)

The magenta arrows point in the direction of traffic. These arrows are lines indicating where traffic flows.

### 192.4. What else is there to do?

(V0.1)

Lots of things. This part is mostly for rmata (1/11/16)

- (1) Beautify it. Arrows are straight and ugly. Roads in duckietown can be curved, have not-so-subtle lane markings, stop signs, grass, and potentially cones and duckies.....
- (2) Make it interactive. MarkerArrays consist of Markers. What does an InteractiveMarker consist of?
- (3) Establish consistency and validation when adding a tile to a map. This would involve:
  - checking node positions at adjacent tiles
  - multiplying the sparse lane matrices and checking that number of lanes is consistent
  - having a perhaps separate node receive messages from the interactive server, or the basic\_map\_tiler node, and doing these computations for each change

CHAPTER 193  
Package slam

• •

## CHAPTER 194

### Package street\_name\_detector

..

Page left blank