第11章 网络编程
Network Programming: Part I

100076202： 计算机系统导论

任课教师：

计卫星　　宿红毅　　张艳

原作者：

Randal E. **Bryant and** David R. O'Hallaron

The ARPANET in December 1969

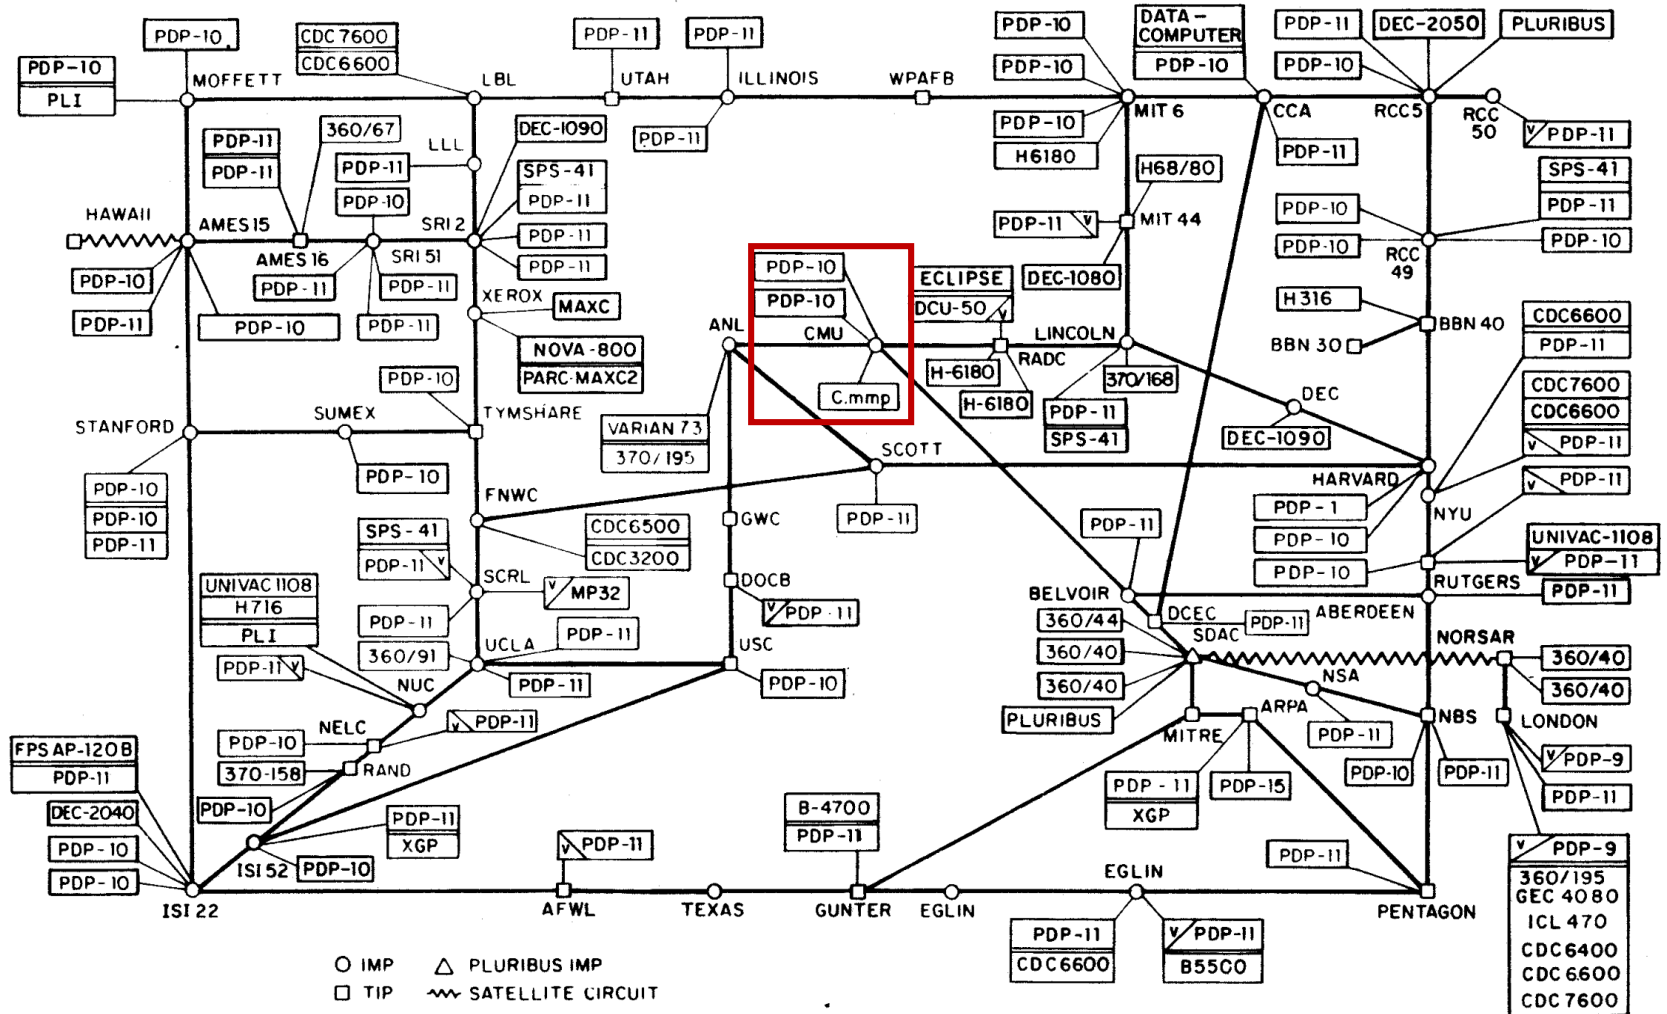1969年12月ARPA网诞生（Internet前身）

ARPA NET, DECEMBER 1970
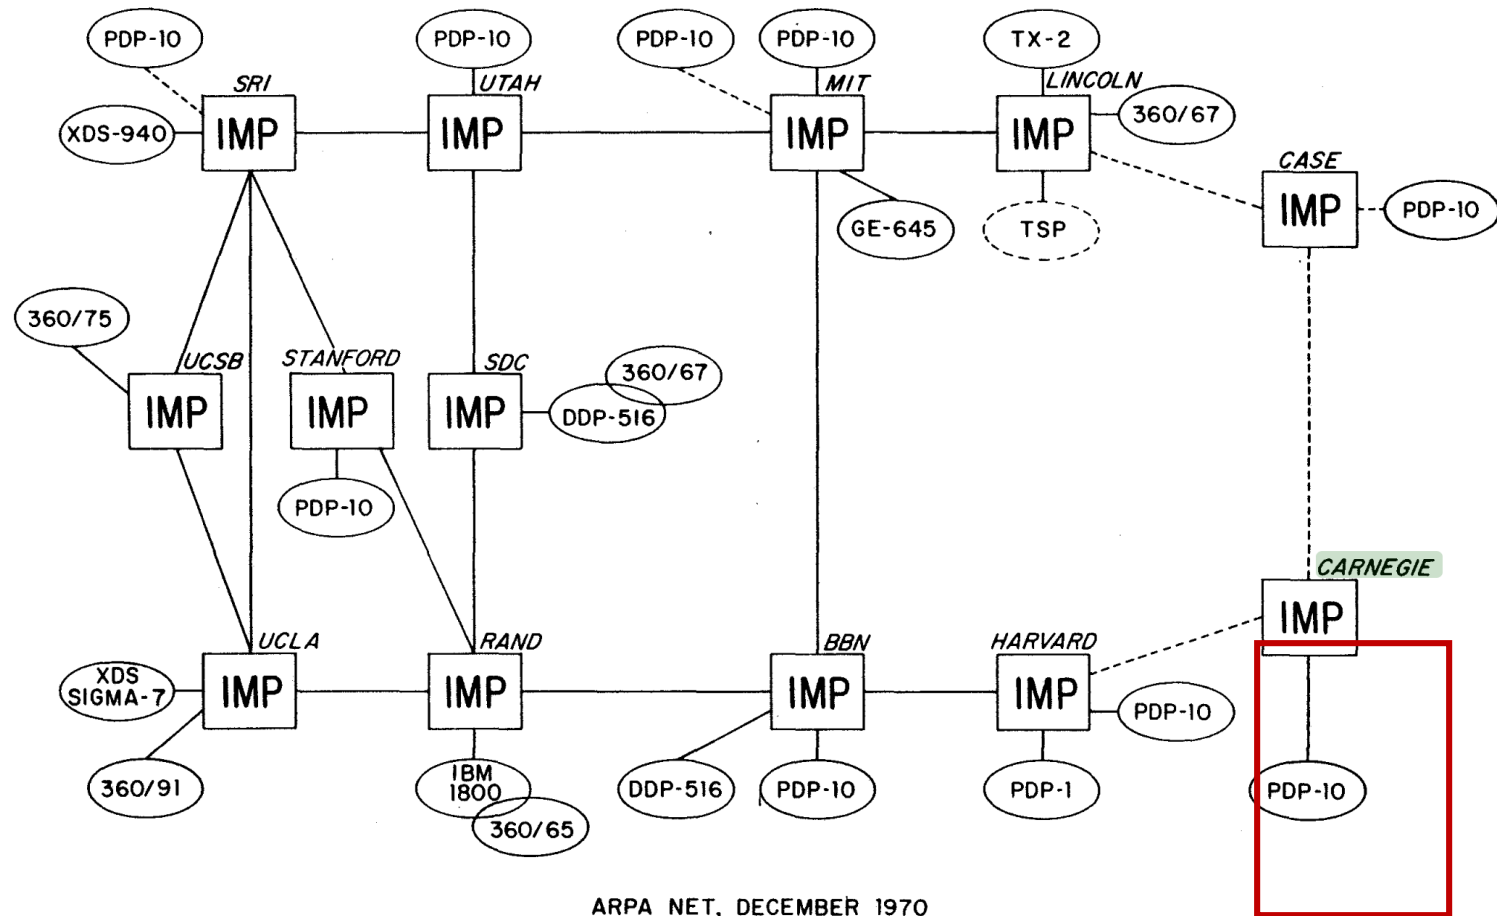
IMP：Interface Message Processor
接口报文处理机
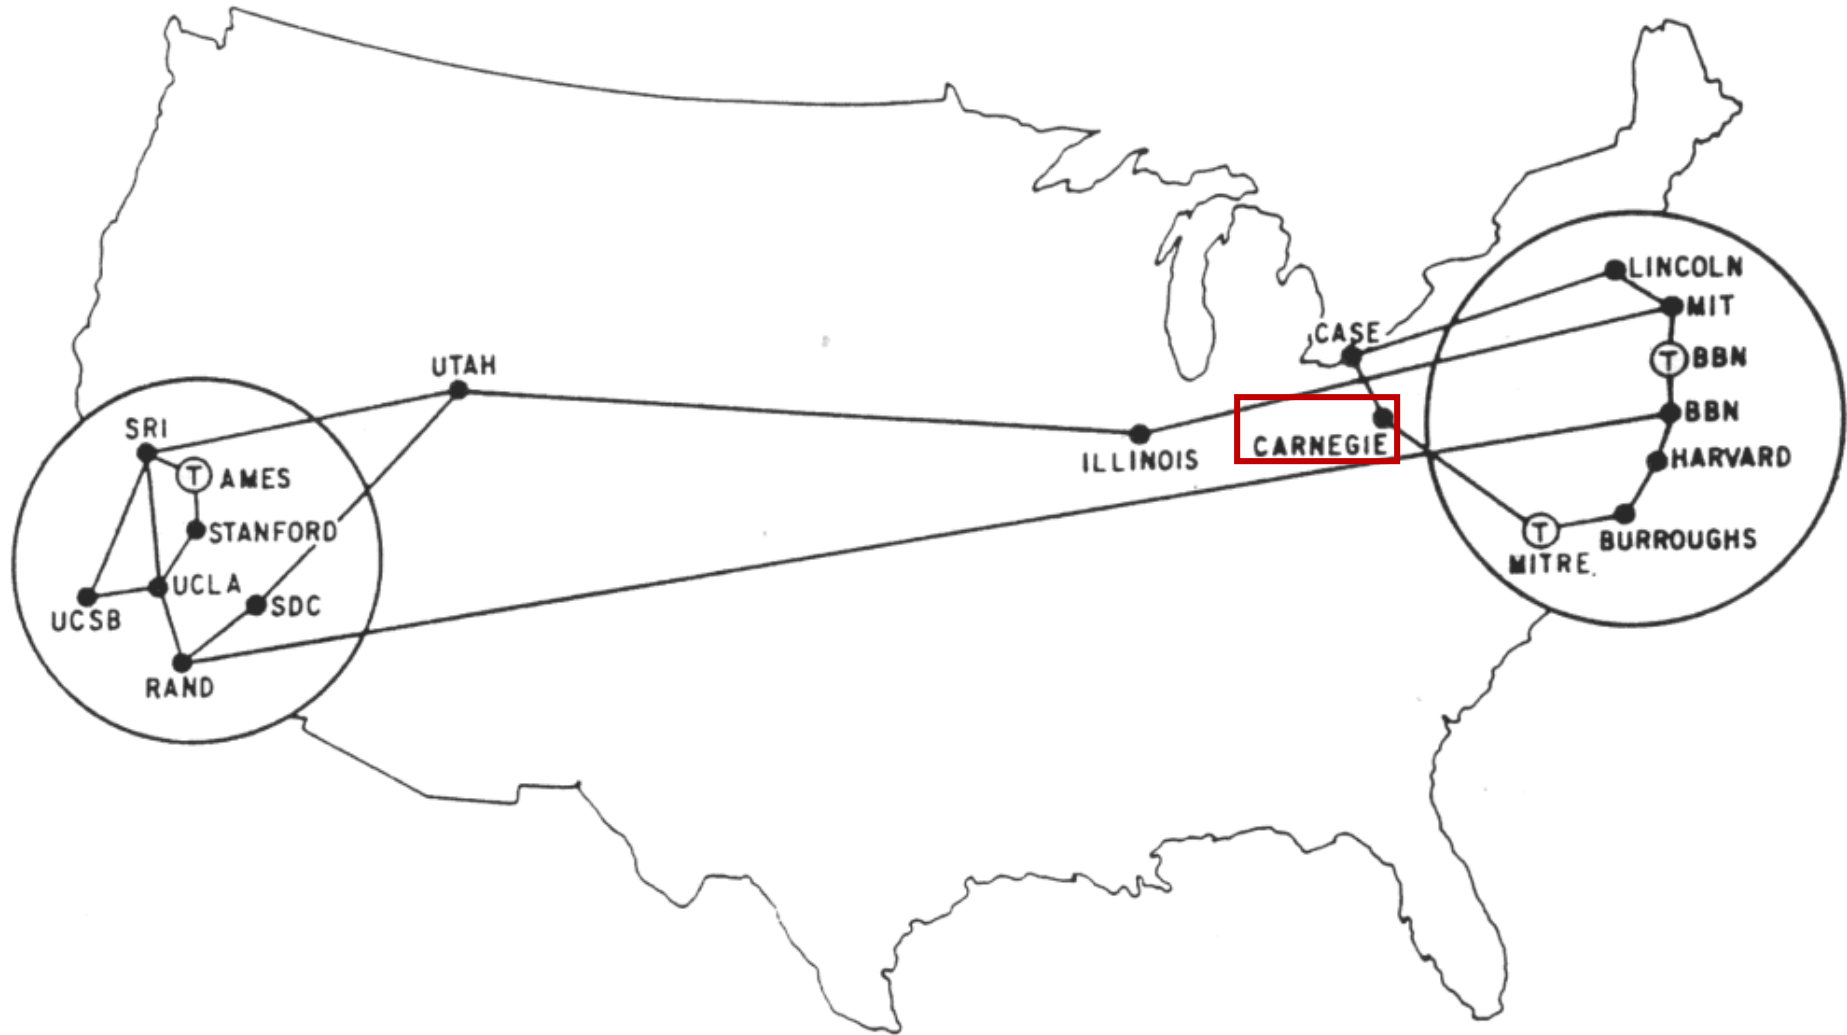
ARPA网逻辑地图，1977年3月

ARPANET LOGICAL MAP, MARCH 1977

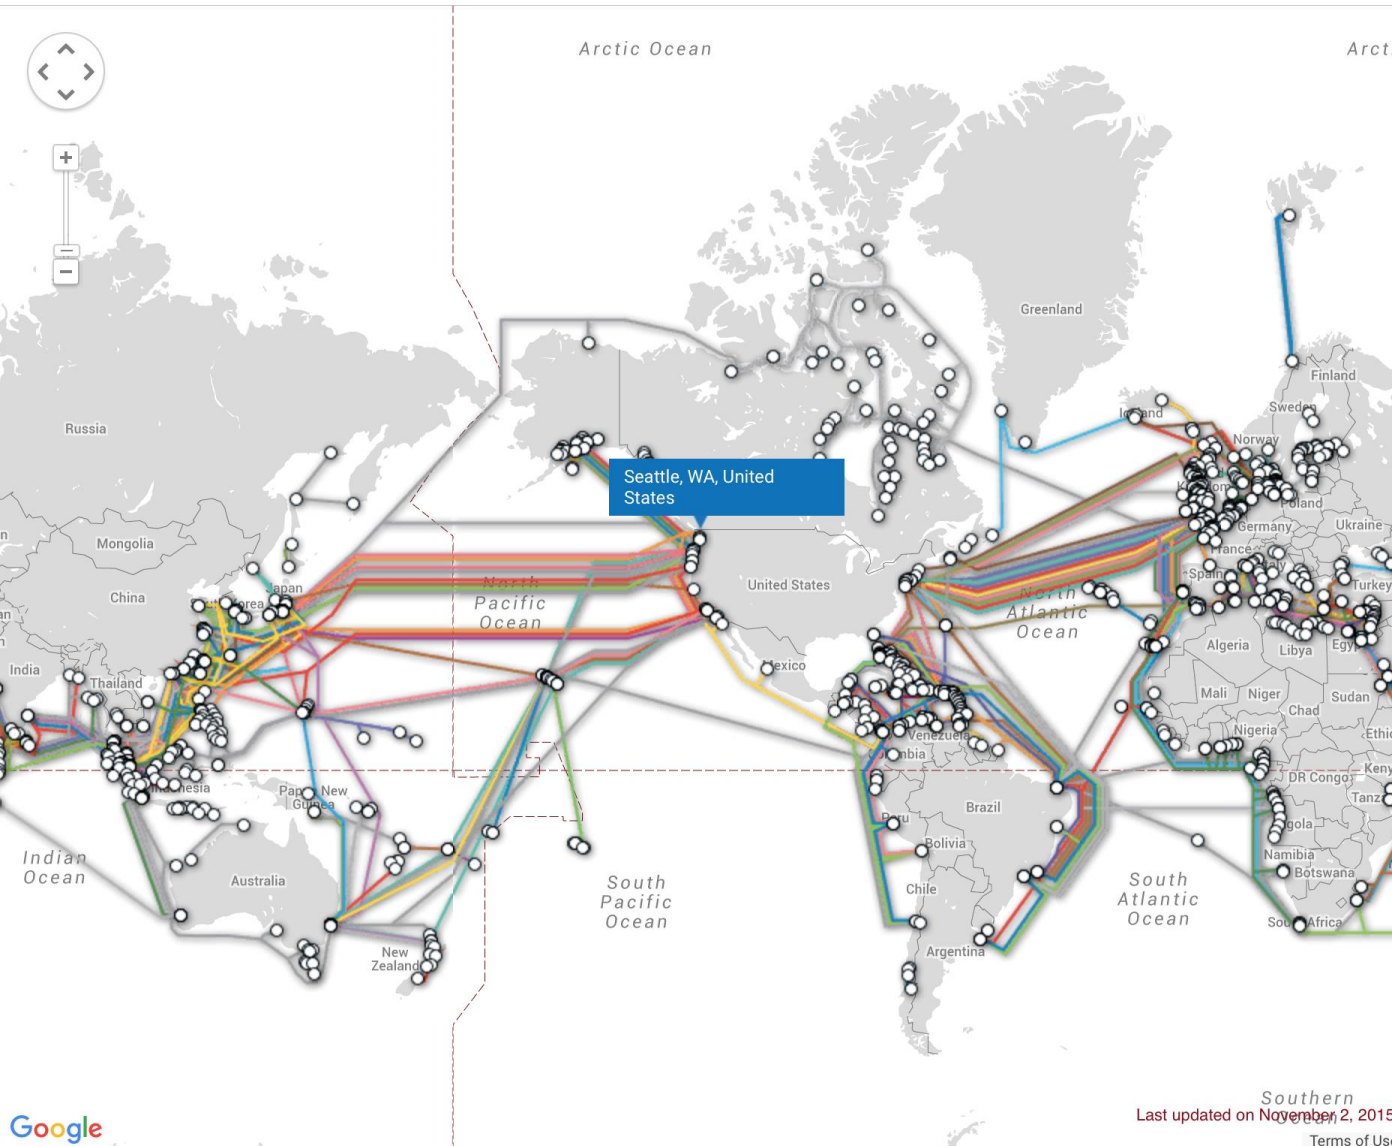(PLEASE NOTE THAT WHILE THIS MAP SHOWS THE HOST POPULATION OF THE NETWORK ACCORDING TO THE BEST INFORMATION OBTAINABLE, NO CLAIM CAN BE MADE FOR ITS ACCURACY)

Carna Botnet收集的4600亿设备连接互联网地图
A Map of 460 Billion Device Connections to the Internet collected by the Carna Botnet(僵尸网络)

++
Average
--

Relative IPv4 utilization observed using ICMP Ping requests

Source: Carna Botnet
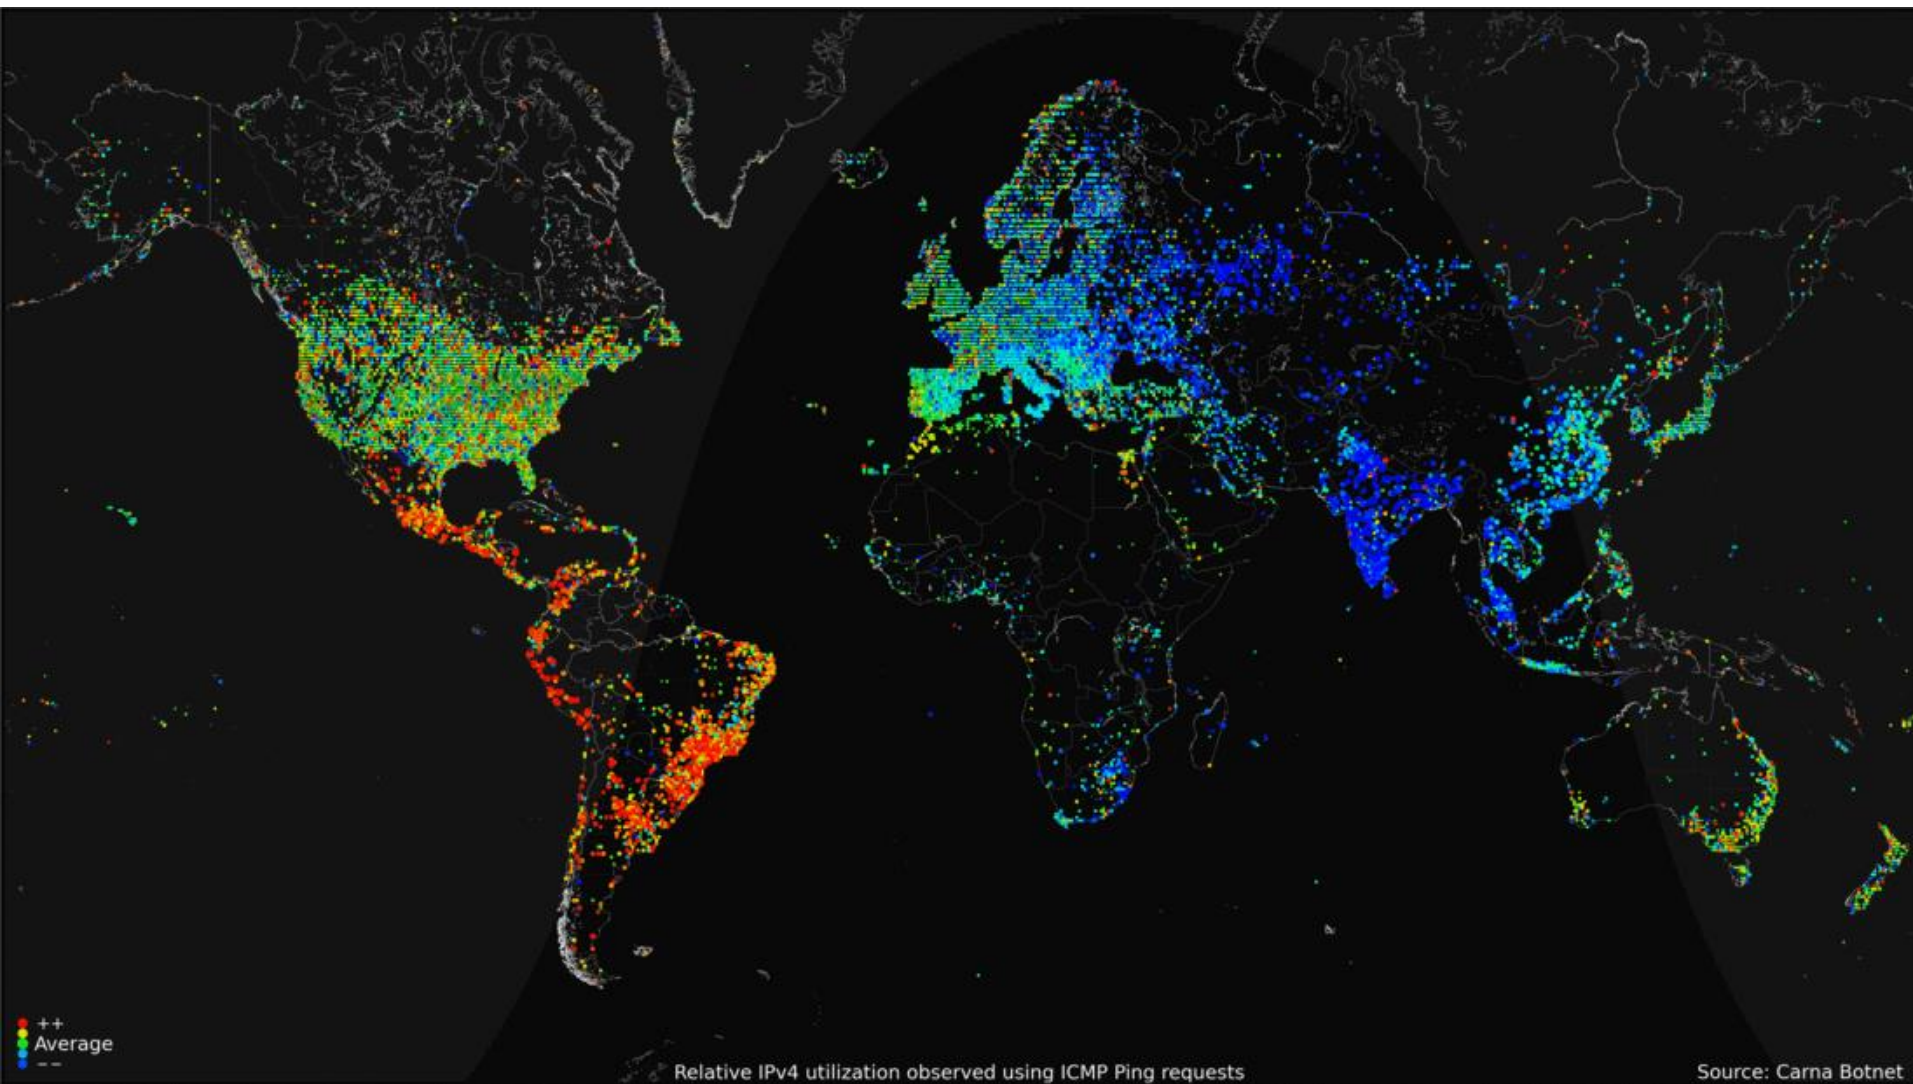
海底电缆图 Submarine Cable Map

客户-服务器事务 A Client-Server Transaction

- 多数网络应用基于客户-服务器模型 **Most network applications are based on the client-server model:**
  - 一个服务器进程和一个或多个客户进程 A ***server*** process and one or more ***client*** processes
  - 服务器管理一些资源 Server manages some ***resource***
  - 服务器通过操作资源为客户提供服务 Server provides ***service*** by manipulating resource for clients
  - 服务器由来自客户的请求激活（自动售货机类比）Server activated by request from client (vending machine analogy)

1.客户发送请求
1. Client sends request

Client process → **Server process** ↔ **Resource**

4.客户处理响应
4. Client handles response

3.服务器发送响应
3. Server sends response

2.服务器处理请求
2. Server handles request
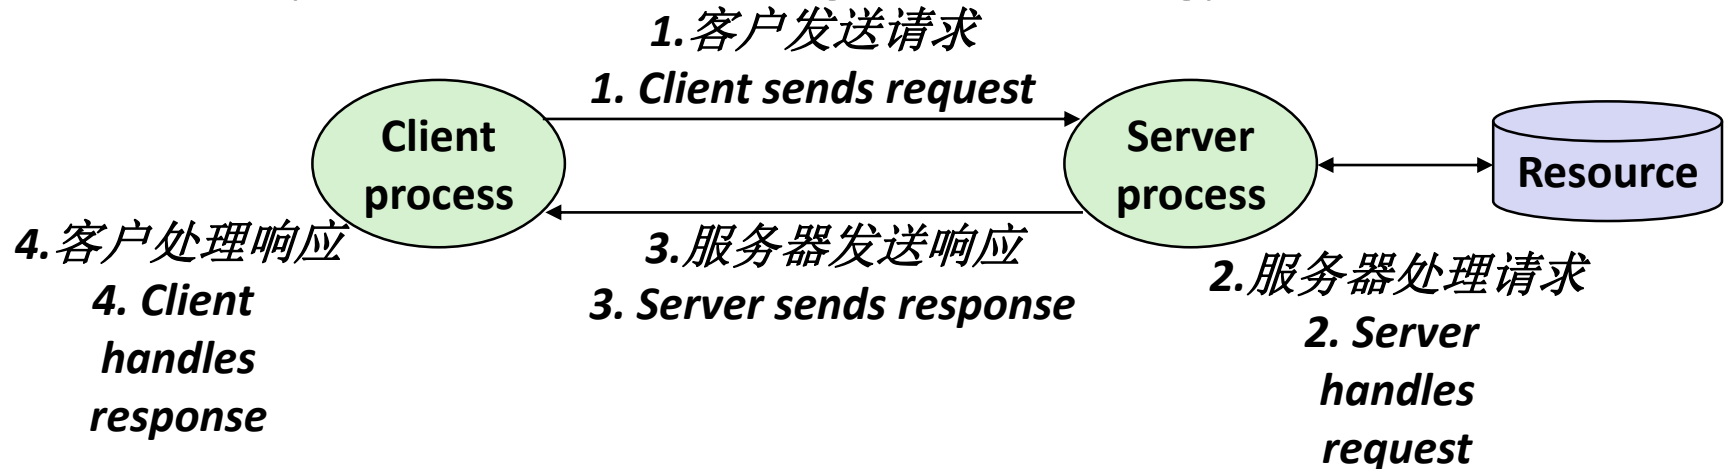
注意：客户和服务器是运行在主机上的进程（可以是相同或不同的主机）
Note: clients and servers are processes running on hosts (can be the same or different hosts)

网络主机的硬件组织
Hardware Organization of a Network Host

CPU chip

register file

ALU

system bus

memory bus

MI

I/O bridge

main memory

扩展槽 **Expansion slots**

I/O bus

USB controller

graphics adapter

disk controller

network adapter

mouse keyboard

monitor

disk
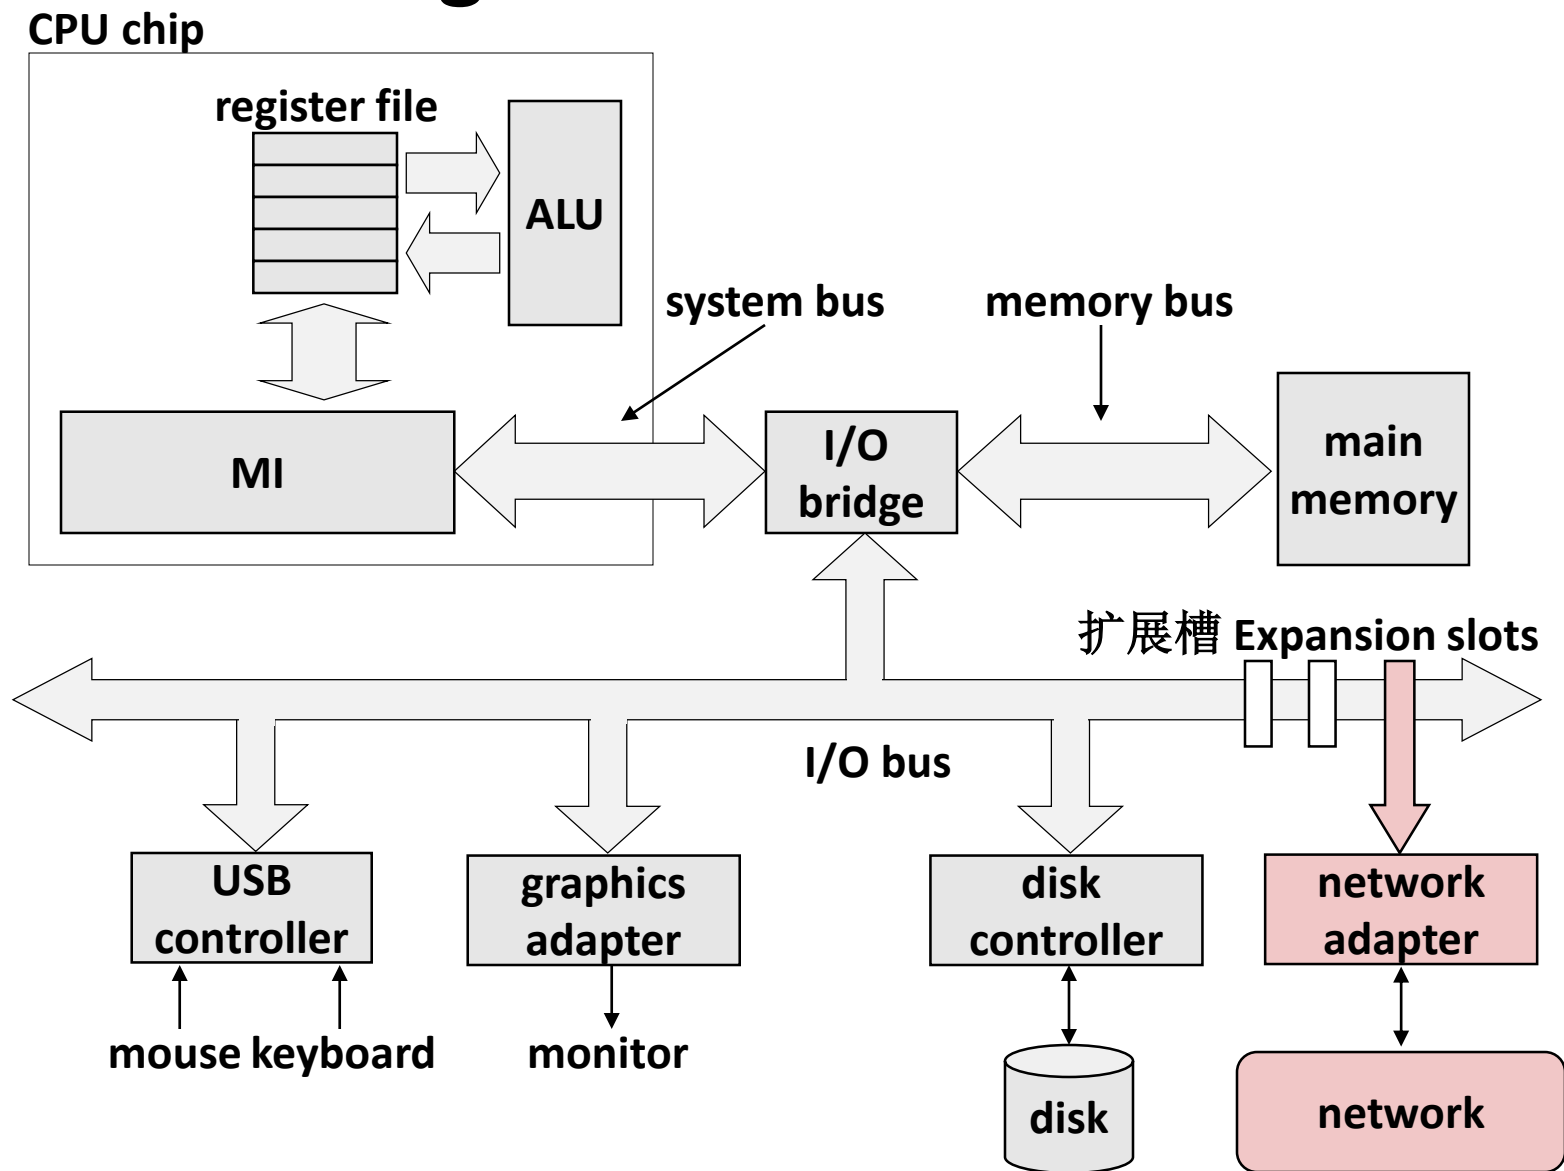
network

计算机网络
Computer Networks

- 网络是一个按地理邻近度组织的盒子和电线的分层系统
  A *network* is a hierarchical system of boxes and wires organized by geographical proximity
  - LAN（局域网）跨越建筑物或校园 LAN (Local Area Network) spans a building or campus
    - 以太网是最突出的例子 Ethernet is most prominent example
  - 广域网（WAN）遍布全国或世界 WAN (Wide Area Network) spans country or world
    - 通常是高速点对点（主要是光纤）链路 Typically high-speed point-to-point (mostly optical) links
  - 还有：SAN（存储区域网络）、MAN（城域网）等等 Also: SAN (Storage area network), MAN (Metropolitan), etc., etc.

计算机网络
Computer Networks

- 互联网络（**internet**）是互连的网络集合 **An** *internetwork (internet)* **is an interconnected set of networks**
    - 全球IP Internet（大写I）是internet（小写i）最著名例子 The Global IP Internet (uppercase "I") is the most famous example of an internet (lowercase "i")

- 让我们看看互联网络是如何从头开始构建的 **Let's see how an internet is built from the ground up**

老式最低级：以太网网段
Old Lowest Level: Ethernet Segment

host   host   host

100 Mb/s   100 Mb/s

hub

端口 *port*
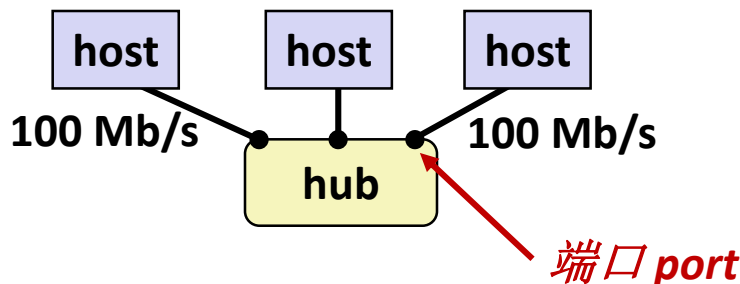
- 以太网段由一组通过电缆（双绞线）连接到集线器的主机组成 **Ethernet segment consists of a collection of *hosts* connected by wires (twisted pairs) to a *hub***

- 跨越建筑物中的房间或楼层 **Spans room or floor in a building**

老式最低级：以太网网段
Old Lowest Level: Ethernet Segment

端口 *port*
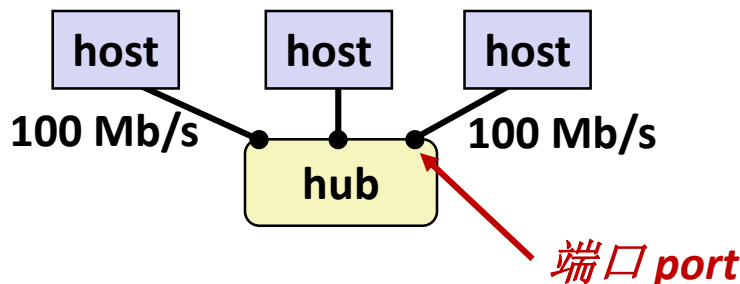
- ■ 运营 **Operation**
  - ■ 每个以太网适配器都有一个唯一的48位地址（MAC地址） Each Ethernet adapter has a unique 48-bit address (MAC address)
    - ▪ 例如，00:16:ea:e3:54:e6   E.g., 00:16:ea:e3:54:e6
  - ■ 主机以称为**帧**的块向任何其他主机发送比特 Hosts send bits to any other host in chunks called *frames*
  - ■ 集线器亦步亦趋地将每个位从每个端口复制到每个其他端口 Hub slavishly copies each bit from each port to every other port
    - ▪ 每个主机都能看到每一个比特位 Every host sees every bit
  - [注：集线器已过时。网桥（交换机、路由器）变得足够便宜，可以取代它们]
  - [Note: Hubs are obsolete. Bridges (switches, routers) became cheap enough to replace them]

下一级：网桥连接的以太网网段
Next Level: Bridged Ethernet Segment
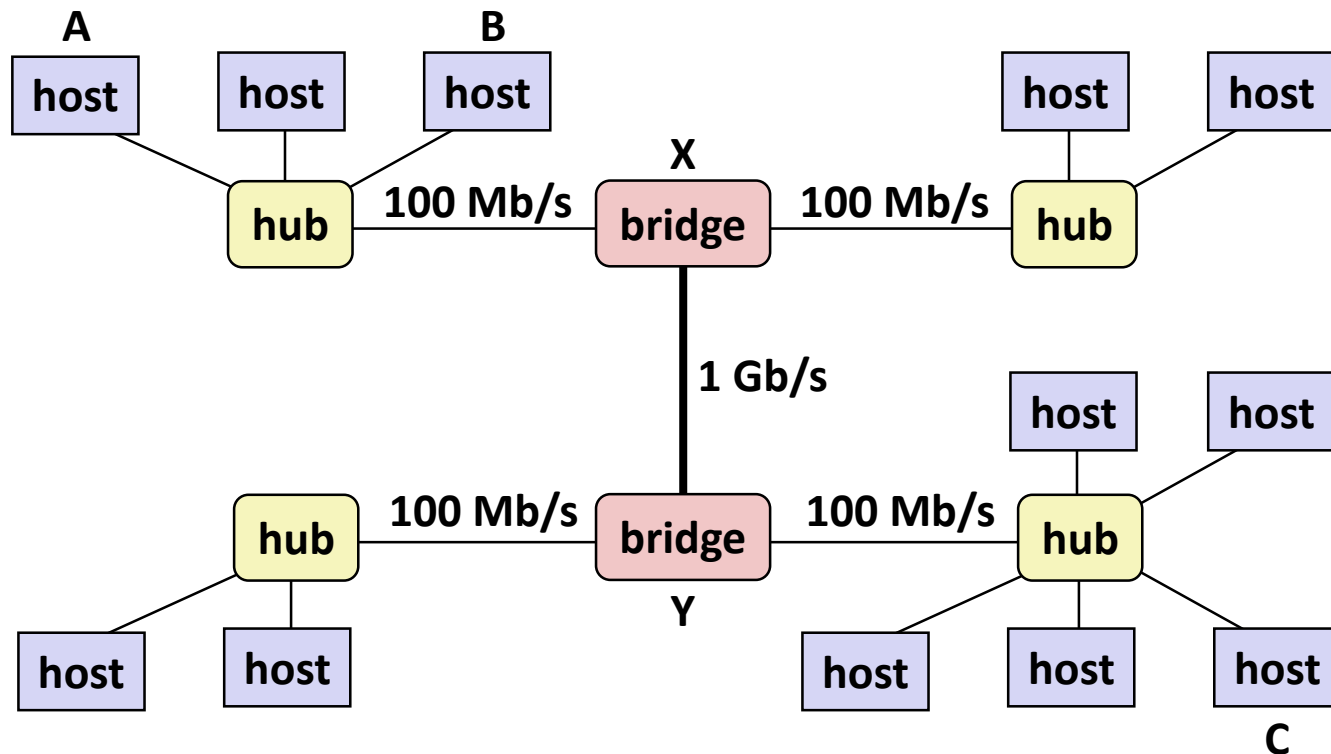
- 跨越建筑物或园区 **Spans building or campus**

- 网桥聪明地了解哪些主机可以从哪些端口访问，然后有选择地将帧从一个端口复制到另一个端口 **Bridges cleverly learn which hosts are reachable from which ports and then selectively copy frames from port to port**

局域网的概念视图
Conceptual View of LANs

- 为了简单起见，集线器、网桥和电缆通常显示为连接到单个电缆的主机集合：**For simplicity, hubs, bridges, and wires are often shown as a collection of hosts attached to a single wire:**

| host | host | ⋯ | host |

下一级：互联网络 Next Level: internets

- 多个不兼容的局域网可以通过称为路由器的专用计算机进行物理连接 **Multiple incompatible LANs can be physically connected by specialized computers called *routers***

- 互连的网络称为互联网络（小写）**The connected networks are called an *internet* (lower case)**
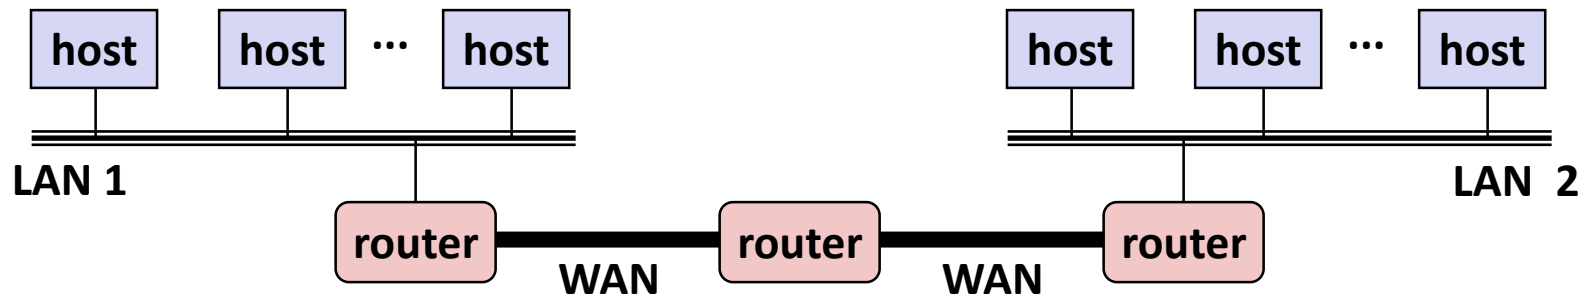
LAN 1和LAN 2可能完全不同，完全不兼容
（例如，以太网、光纤通道、802.11*、T1链路、DSL等）
LAN 1 and LAN 2 might be completely different, totally incompatible

(e.g., Ethernet, Fibre Channel, 802.11*, T1-links, DSL, …)

互联网络的逻辑结构
Logical Structure of an internet
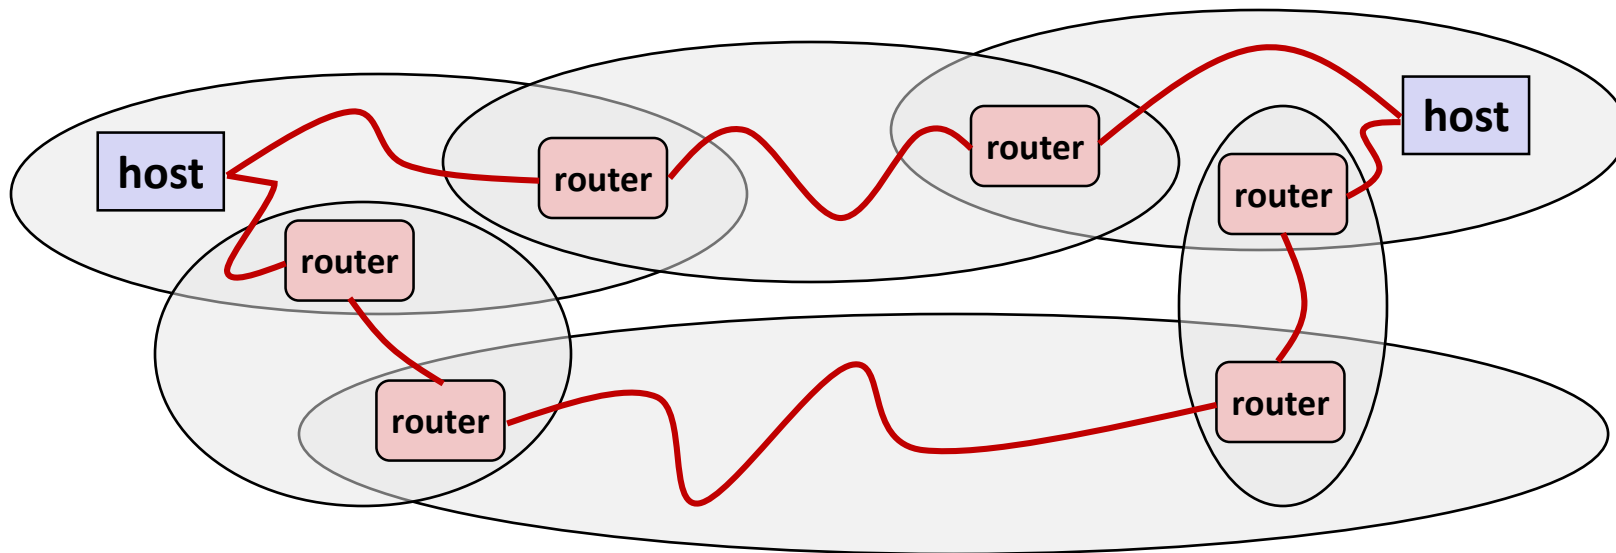
- 网络的自组织互连 **Ad hoc interconnection of networks**
  - 无特定拓扑 No particular topology
  - 非常不同的路由器和链路容量 Vastly different router & link capacities
- 通过网络跳步将数据包从源发送到目的地 **Send packets from source to destination by hopping through networks**
  - 路由器形成从一个网络到另一个网络的桥梁 Router forms bridge from one network to another
  - 不同的数据包可能采用不同的路由 Different packets may take different

互联网络协议（网际协议）的概念
The Notion of an internet Protocol

- 如何通过不兼容的局域网和广域网发送比特？ **How is it possible to send bits across incompatible LANs and WANs?**

- 解决方案：在每个主机和路由器上运行协议软件 **Solution:** *protocol* **software running on each host and router**
  - 协议是一组规则，用于控制主机和路由器在网络间传输数据时应如何协作 Protocol is a set of rules that governs how hosts and routers should cooperate when they transfer data from network to network.
  - 消除不同网络之间的差异 Smooths out the differences between the different networks

互联网络协议（网际协议）做什么?
What Does an internet Protocol Do?

- 提供命名方案 Provides a *naming scheme*
  - 互联网络协议（网际协议）定义了主机地址的统一格式 An internet protocol defines a uniform format for ***host addresses***
  - 为每个主机（和路由器）分配了至少一个唯一标识它的互联网络（网际）地址 Each host (and router) is assigned at least one of these internet addresses that uniquely identifies it

- 提供传递机制 Provides a *delivery mechanism*
  - 互联网络协议（网际协议）定义了标准传输单元（**分组**）An internet protocol defines a standard transfer unit (***packet***)
  - 分组由分组首部和有效载荷组成 Packet consists of ***header*** and ***payload***
    - 分组首部：包含分组大小、源地址和目标地址等 Header: contains info such as packet size, source and destination addresses
    - 信息有效负载：包含从源主机发送的数据位 Payload: contains data bits sent from source host

通过封装传输互联网络（网际）数据
Transferring internet Data Via Encapsulation

PH: internet packet header 互联网络分组首部
FH: LAN frame header/局域网帧首部
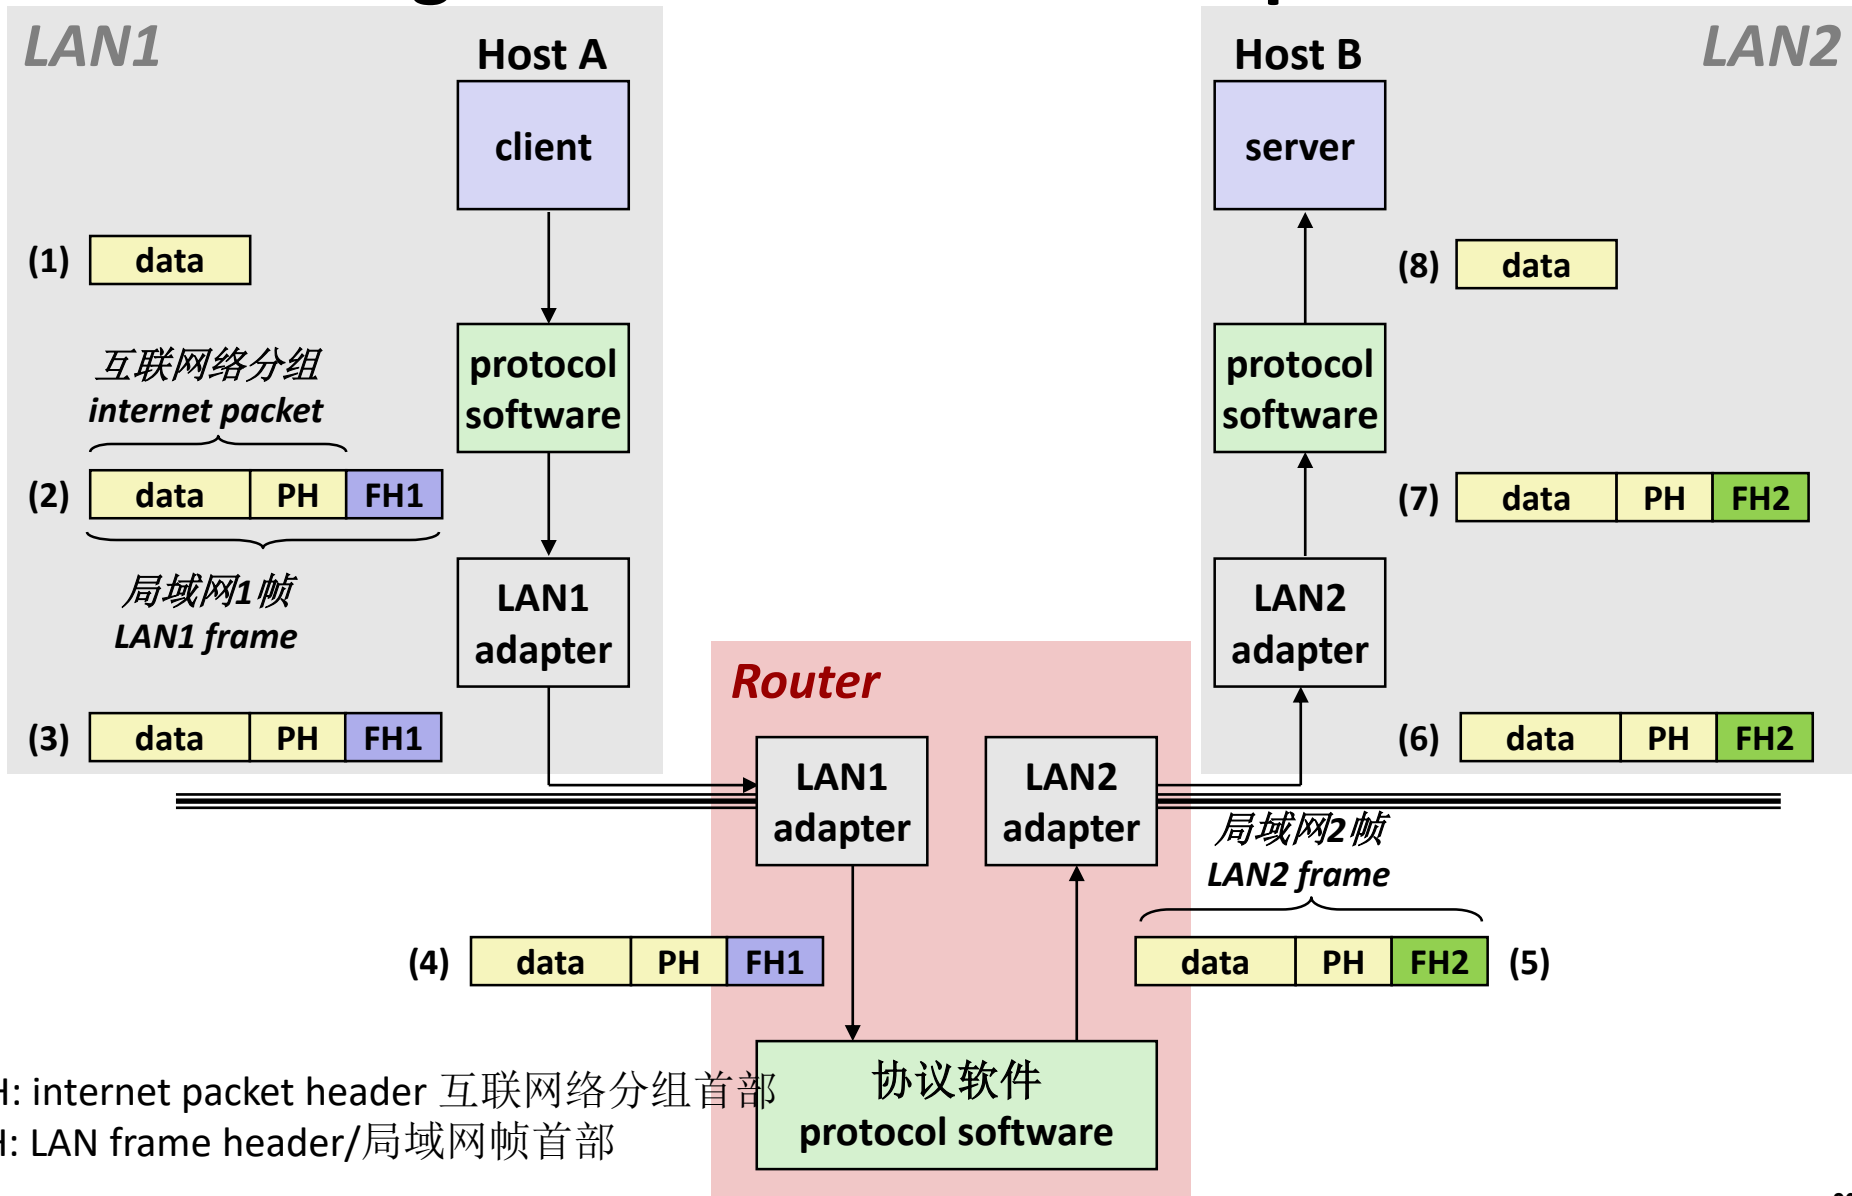
其它问题 Other Issues

- 我们忽略了一些重要问题： **We are glossing over a number of important questions:**
  - 如果不同的网络具有不同的最大帧大小，该怎么办？（分段）What if different networks have different maximum frame sizes? (segmentation)
  - 路由器如何知道向哪里转发帧？ How do routers know where to forward frames?
  - 当网络拓扑发生变化时，如何通知路由器？ How are routers informed when the network topology changes?
  - 如果分组丢失了怎么办？ What if packets get lost?

- 这些（和其他）问题由*计算机网络*系统解决 **These (and other) questions are addressed by the area of systems known as** *computer networking*

全球IP互联网（大写）
Global IP Internet (upper case)

- 互联网络的最著名例子 **Most famous example of an internet**

- 基于**TCP/IP**协议簇 **Based on the TCP/IP protocol family**
  - IP (网际协议 Internet Protocol)
    - 提供基本命名方案和主机之间不可靠分组（数据报）传输能力 Provides *basic naming scheme* and unreliable *delivery capability* of packets (datagrams) from *host-to-host*
  - UDP (用户数据报协议 User Datagram Protocol)
    - 使用IP提供进程之间不可靠数据报传输 Uses IP to provide *unreliable* datagram delivery from *process-to-process*
  - TCP (传输控制协议 Transmission Control Protocol)
    - 使用IP提供在连接上进程之间可靠的字节流 Uses IP to provide *reliable* byte streams from *process-to-process* over *connections*

- 通过混合**Unix**文件**I/O**和套接字接口函数来访问 **Accessed via a mix of Unix file I/O and functions from the** *sockets interface*

互联网应用的硬件和软件组织
Hardware and Software Organization of an Internet Application

互联网客户主机
Internet client host

互联网服务器主机
Internet server host

套接字接口
（系统功能调用）
***Sockets interface
(system calls)***

硬件接口
（中断）
***Hardware interface
(interrupts)***

Client

用户代码 User code

TCP/IP

内核代码 Kernel code

**Network
adapter**

*硬件和固件
Hardware
and firmware*

Server

TCP/IP

**Network
adapter**

全球**IP**互联网 **Global IP Internet**
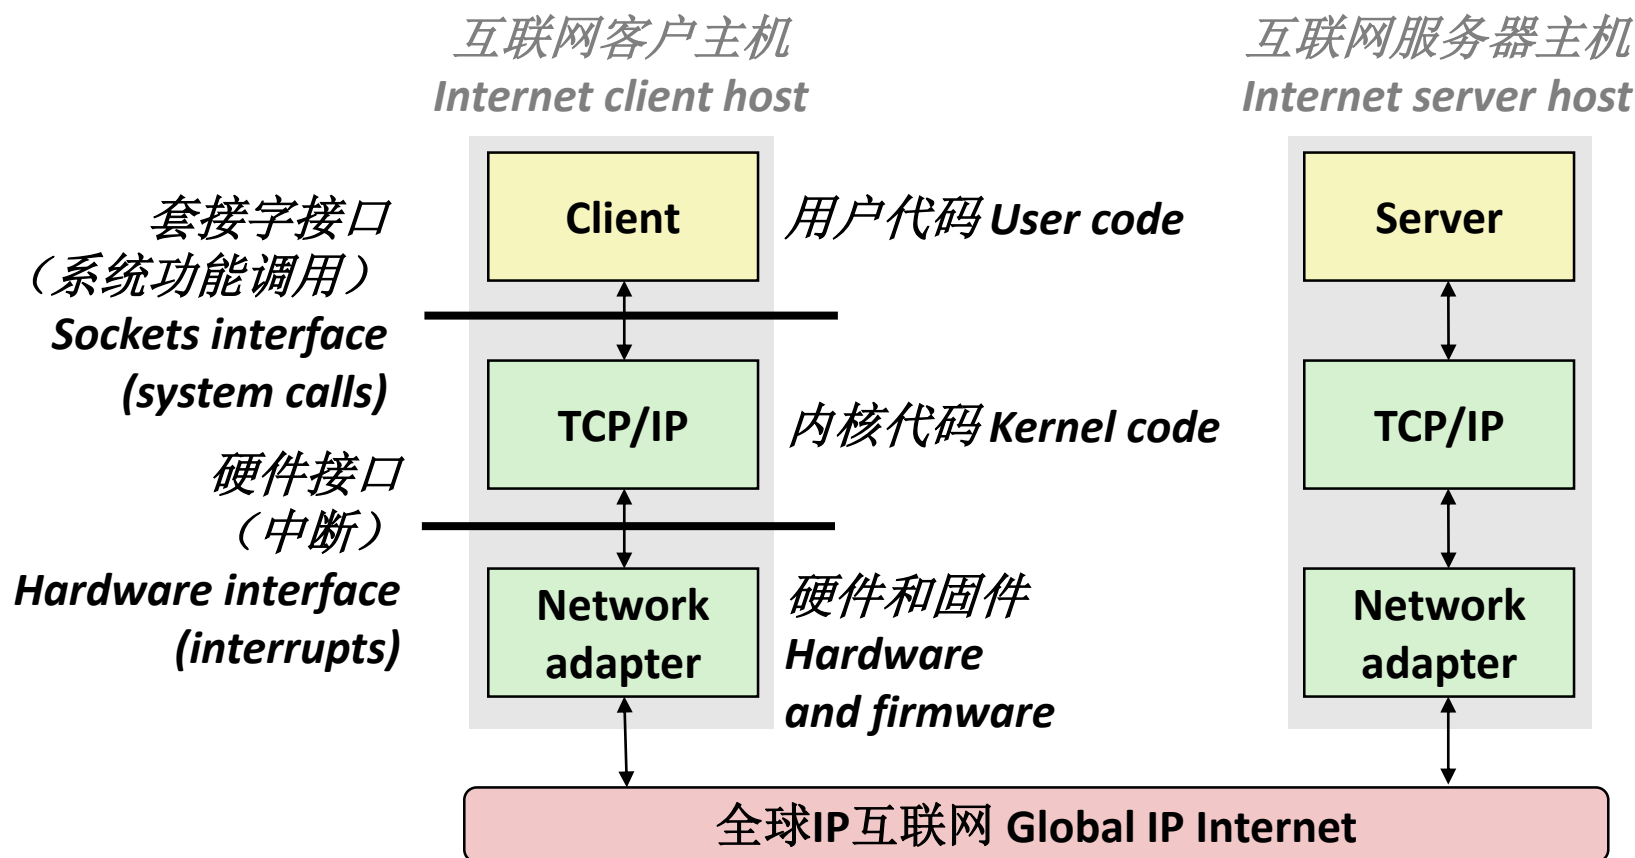
互联网的程序员视图
A Programmer's View of the Internet

1.主机映射为一组**32**位*IP地址* **1. Hosts are mapped to a set of 32-bit *IP addresses***

- 128.2.203.179
- 127.0.0.1 (总是localhost主机 always *localhost*)

2.为了方便人使用，域名系统将一组称为互联网域名的标识符映射成IP地址 **2. As a convenience for humans, the Domain Name System maps a set of identifiers called Internet *domain names* to IP addresses:**

- www.cs.cmu.edu "解析成 resolves to" 128.2.217.3

3. 一台互联网主机上的进程可以通过连接和另一台互联网主机上的进程通信 **A process on one Internet host can communicate with a process on another Internet host over a *connection***

旁注：IPv4和IPv6 Aside: IPv4 and IPv6

- 最初的互联网协议（**32位地址**）被称为互联网协议版本**4**（**IPv4**） **The original Internet Protocol, with its 32-bit addresses, is known as *Internet Protocol Version 4* (IPv4)**

- **1996**年：互联网工程任务组（**IETF**）引入了具有**128**位地址的互联网协议版本**6**（**IPv6**） **1996: Internet Engineering Task Force (IETF) introduced *Internet Protocol Version 6* (IPv6) with 128-bit addresses**
  - 计划作为IPv4的继任者 Intended as the successor to IPv4
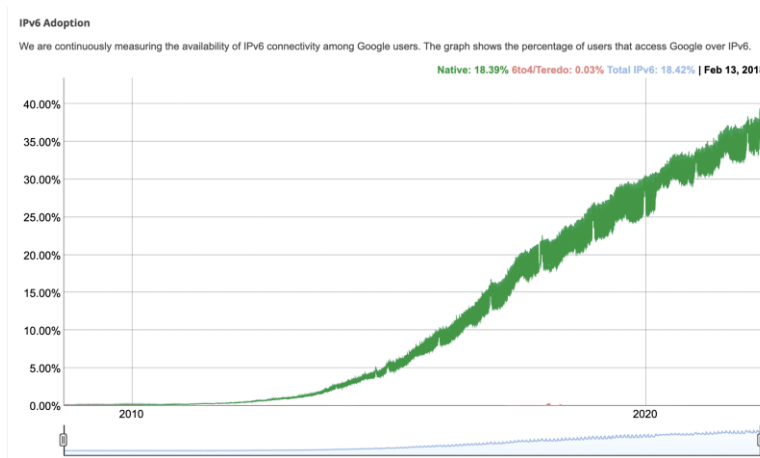
Google公司的IPv6流量
IPv6 traffic at Google

旁注：IPv4和IPv6 Aside: IPv4 and IPv6

- 大部分互联网流量仍由**IPv4**承载 **Majority of Internet traffic still carried by IPv4**

- 我们将关注**IPv4**，但将向您展示如何编写独立于协议的网络代码 **We will focus on IPv4, but will show you how to write networking code that is protocol-independent.**
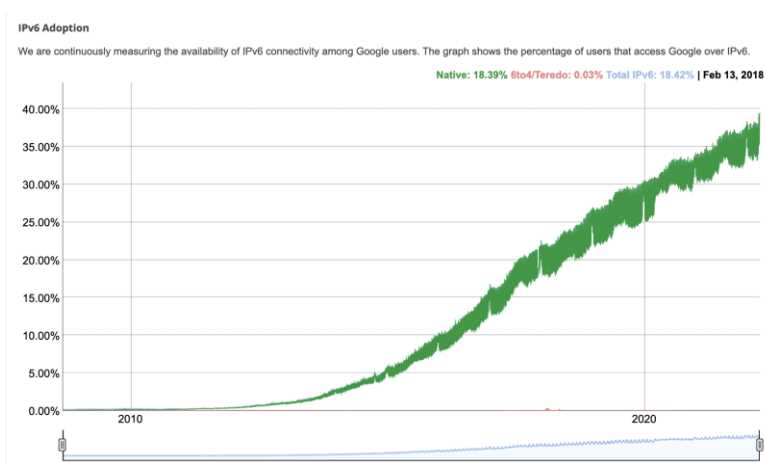
Google公司的**IPv6**流量
IPv6 traffic at Google

(1) IP地址 IP Addresses

- **32位IP地址存储在IP地址结构中 32-bit IP addresses are stored in an *IP address struct***
  - IP地址始终以网络字节顺序（大端字节顺序）存储在内存中 IP addresses are always stored in memory in *network byte order* (big-endian byte order)
  - 实际上是分组首部中的字段（整数）从一台计算机传输到另一台计算机 True True in general for any integer transferred in a packet header from one machine to another.
    - 例如，用于标识互联网连接的端口号 E.g., the port number used to identify an Internet connection.

```
/* Internet address structure */
struct in_addr {
    uint32_t  s_addr; /* network byte order (big-endian) */
};
```

点分十进制记法 Dotted Decimal Notation

- 按照惯例，**32位IP地址中的每个字节由其十进制值表示，并用句点分隔 By convention, each byte in a 32-bit IP address is represented by its decimal value and separated by a period**
  - IP地址： IP address: `0x8002C2F2 = 128.2.194.242`

- 使用**getaddrinfo和getnameinfo**函数（稍后介绍）在**IP**地址和点分十进制格式之间进行转换 **Use `getaddrinfo` and `getnameinfo` functions (described later) to convert between IP addresses and dotted decimal format.**

(2) 互联网域名 Internet Domain Names

根没有名字 *unnamed root*

.net　　.edu　　.gov　　.com

mit　　cmu　　berkeley　　amazon

cs　　　　ece

ics　　　　pdl

whaleshark
128.2.210.175

www
128.2.131.66

www
54.230.48.28
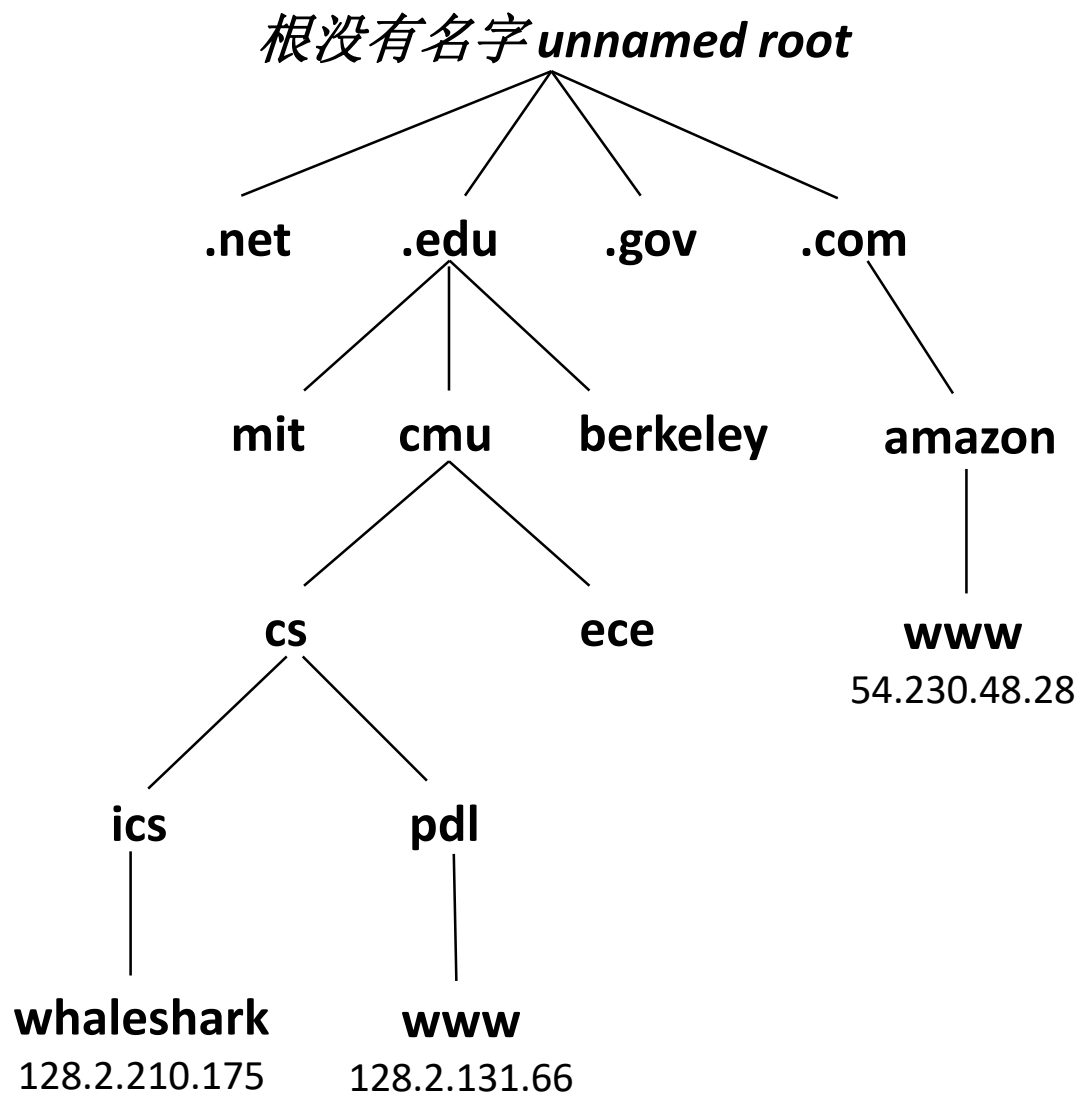
第一级域名
First-level domain names

第二级域名
Second-level domain names

第三级域名
Third-level domain names

.space	.store	.stream	.studio
.study	.style	.supplies	.supply
.support	.surf	.surgery	.sydney
.systems	.taipei	.tattoo	.tax
.taxi	.team	.tech	.technology
.tennis	.theater	.theatre	.tienda
.tips	.tires	.tirol	.today
.tokyo	.tools	.top	.tours
.town	.toys	.trade	.trading
.training	.tube	.university	.uno
.vacations	.vegas	.ventures	.versicherung
.vet	.viajes	.video	.villas
.vin	.vip	.vision	.vlaanderen
.vodka	.vote	.voting	.voto
.voyage	.wales	.wang	.watch
.webcam	.website	.wed	.wedding
.whoswho	.wien	.wiki	.win
.wine	.work	.works	.world
.wtf	.在线	.移动	.онлайн
.сайт	.קום	.орг	.中文网
.संगठन	.机构	.みんな	.游戏
.企业	.xyz	.yoga	.yokohama
.zone			

域名系统 Domain Naming System (DNS)

- 互联网在一个巨大的全球分布式数据库*DNS*中维护**IP**地址和域名之间的映射 **The Internet maintains a mapping between IP addresses and domain names in a huge worldwide distributed database called *DNS***

- 从概念上讲，程序员可以将**DNS**数据库视为数百万个*主机条目*的集合 **Conceptually, programmers can view the DNS database as a collection of millions of *host entries.***
  - 每个主机条目定义一组域名和IP地址之间的映射 Each host entry defines the mapping between a set of domain names and IP addresses.
  - 在数学意义上，主机条目是域名和IP地址的等价类 In a mathematical sense, a host entry is an equivalence class of domain names and IP addresses.

DNS映射的属性 roperties of DNS Mappings

- 使用nslookup可以浏览DNS映射的属性 Can explore properties of DNS mappings using `nslookup`

  - (为简洁起见，编辑了输出 Output edited for brevity)

- 每个主机都有一个本地定义的域名localhost，它始终映射为回环地址127.0.0.1 Each host has a locally defined domain name `localhost` which always maps to the *loopback address* `127.0.0.1`

```
linux> nslookup localhost
Address: 127.0.0.1
```

- 使用hostname确定本地主机的真实域名 Use `hostname` to determine real domain name of local host:

```
linux> hostname
whaleshark.ics.cs.cmu.edu
```

DNS映射的属性 （续）
Properties of DNS Mappings (cont)

- 简单情况：域名和IP地址之间一对一的映射 **Simple case: one-to-one mapping between domain name and IP address:**

```
linux> nslookup whaleshark.ics.cs.cmu.edu
Address: 128.2.210.175
```

- 多个域名映射到同样的IP地址 **Multiple domain names mapped to the same IP address:**

```
linux> nslookup cs.mit.edu
Address: 18.25.0.23
linux> nslookup eecs.mit.edu
Address: 18.25.0.23
```

- 以及逆向解析 **And backwards:**

```
linux> nslookup 18.25.0.23
23.0.25.18.in-addr.arpa    name = eecs.mit.edu.
```

DNS映射的属性 （续）
Properties of DNS Mappings (cont)

■ 多个域名映射到多个IP地址 **Multiple domain names mapped to multiple IP addresses:**

```
linux> nslookup www.twitter.com
Address: 104.244.42.65
Address: 104.244.42.129
Address: 104.244.42.193
Address: 104.244.42.1

linux> nslookup twitter.com
Address: 104.244.42.129
Address: 104.244.42.65
Address: 104.244.42.193
Address: 104.244.42.1
```

■ 有些合法域名没有映射到任何IP地址 **Some valid domain names don't map to any IP address:**

```
linux> nslookup ics.cs.cmu.edu
(No Address given)
```

(3) 互联网连接 Internet Connections

- 客户端和服务器通常通过**TCP***连接*发送字节流进行通信。每个连接是： **Clients and servers most often communicate by sending streams of bytes over TCP *connections*. Each connection is:**
  - *点对点*：连接一对进程 *Point-to-point*: connects a pair of processes.
  - *全双工*：数据可以同时在两个方向上流动 *Full-duplex*: data can flow in both directions at the same time,
  - *可靠*：源发送的字节流最终会按照发送的顺序被目标接收。
    Reliable: stream of bytes sent by the source is eventually received by the destination in the same order it was sent.

- *套接字*是连接的端点 **A *socket* is an endpoint of a connection**
  - *套接字地址*是IP地址：端口对 *Socket address* is an `IPaddress:port` pair

(3) 互联网连接 Internet Connections

- *端口*是一个**16位整数**，用于标识进程： **A *port* is a 16-bit integer that identifies a process:**
  - *临时端口*：当客户端发出连接请求时，由客户端内核自动分配。
    Ephemeral port: Assigned automatically by client kernel when client makes a connection request.
  - *熟知端口*：与服务器提供的某些*服务*相关（例如，端口80与Web服务器相关） ***Well-known port:*** Associated with some *service* provided by a server (e.g., port 80 is associated with Web servers)

熟知的服务名称和端口
Well-known Service Names and Ports

- 流行服务已永久分配了*熟知端口*和相应的*熟知服务名称*: **Popular services have permanently assigned *well-known ports* and corresponding *well-known service names*:**
  - echo服务器：echo servers: echo 7
  - ftp服务器：ftp servers: ftp 21
  - ssh服务器：ssh servers: ssh 22
  - 电子邮件服务器： email servers: smtp 25
  - 未加密的Web服务器： Unencrypted Web servers: http 80
  - SSL/TLS加密Web：SSL/TLS encrypted Web: https 443

- 熟知端口和服务名称之间的映射包含在每个**Linux**机器上的 **/etc/services**文件中 **Mappings between well-known ports and service names is contained in the file `/etc/services` on each Linux machine.**

连接的剖析 Anatomy of a Connection

- 连接由其端点（套接字对）的套接字地址唯一标识 **A connection is uniquely identified by the socket addresses of its endpoints (*socket pair*)**
  - `(cliaddr:cliport, servaddr:servport)`

客户套接字地址
Client socket address
128.2.194.242:51213

服务器套接字地址
Server socket address
208.216.181.15:80

Client

连接套接字对 **Connection socket pair**
(128.2.194.242:51213, 208.216.181.15:80)

Server (port 80)

客户主机地址
Client host address
128.2.194.242

服务器主机地址
Server host address
208.216.181.15
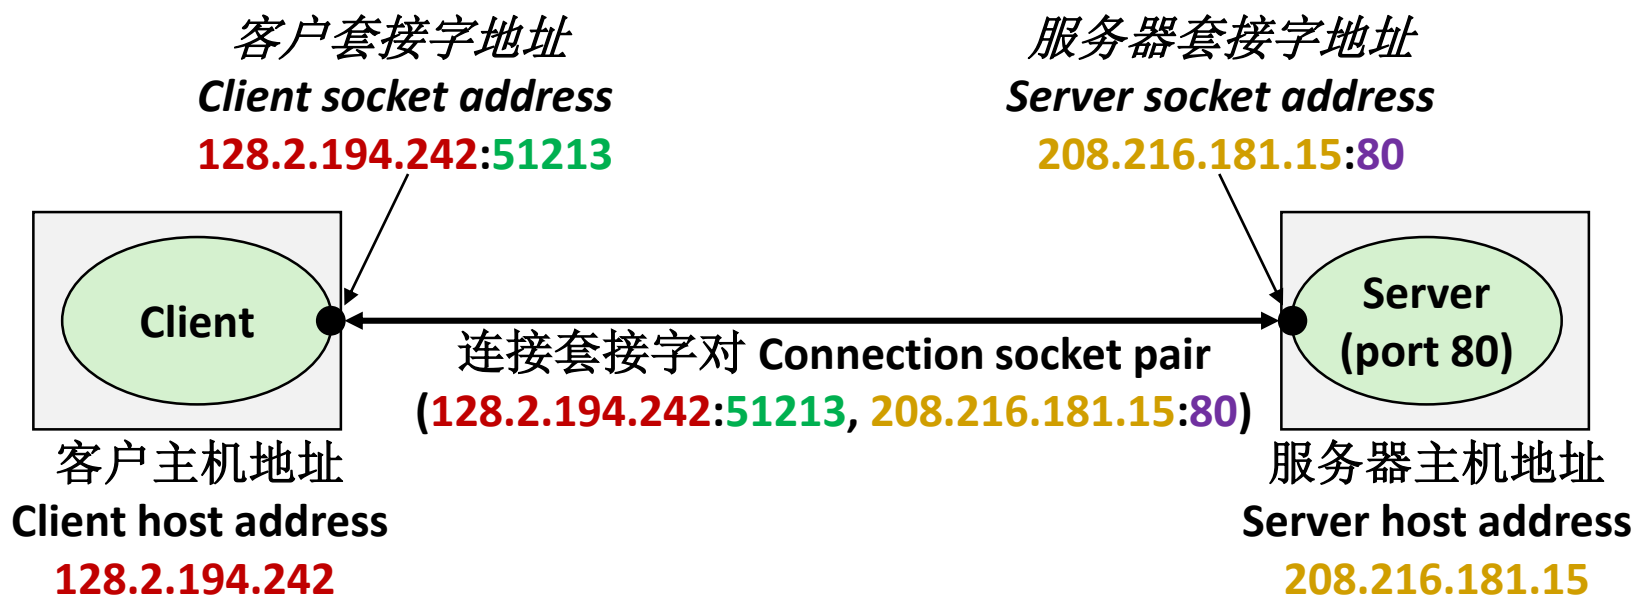
51213是由内核分配的临时端口
51213 is an ephemeral port allocated by the kernel

80是与**Web**服务器关联的熟知端口
80 is a well-known port associated with Web servers

使用端口标识服务
Using Ports to Identify Services

Server host 128.2.194.242

Client host

服务请求
Service request for
128.2.194.242:80
(i.e., the Web server)

Client

Kernel

Web server
(port 80)

Echo server
(port 7)

服务请求
Service request for
128.2.194.242:7
(i.e., the echo server)

Client

Kernel

Web server
(port 80)

Echo server
(port 7)
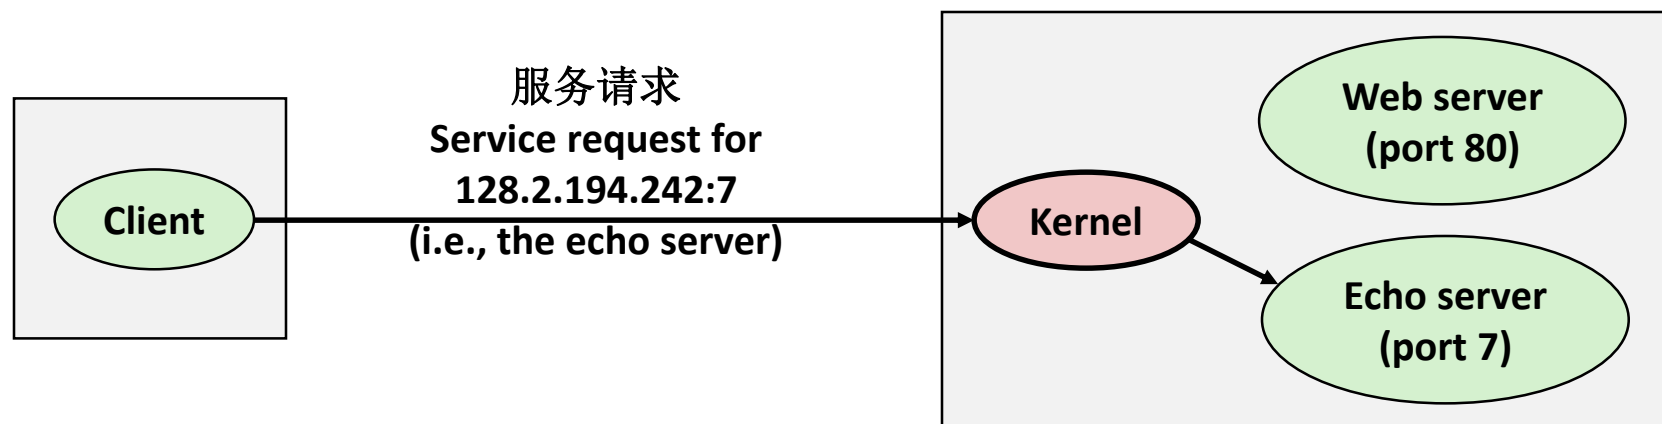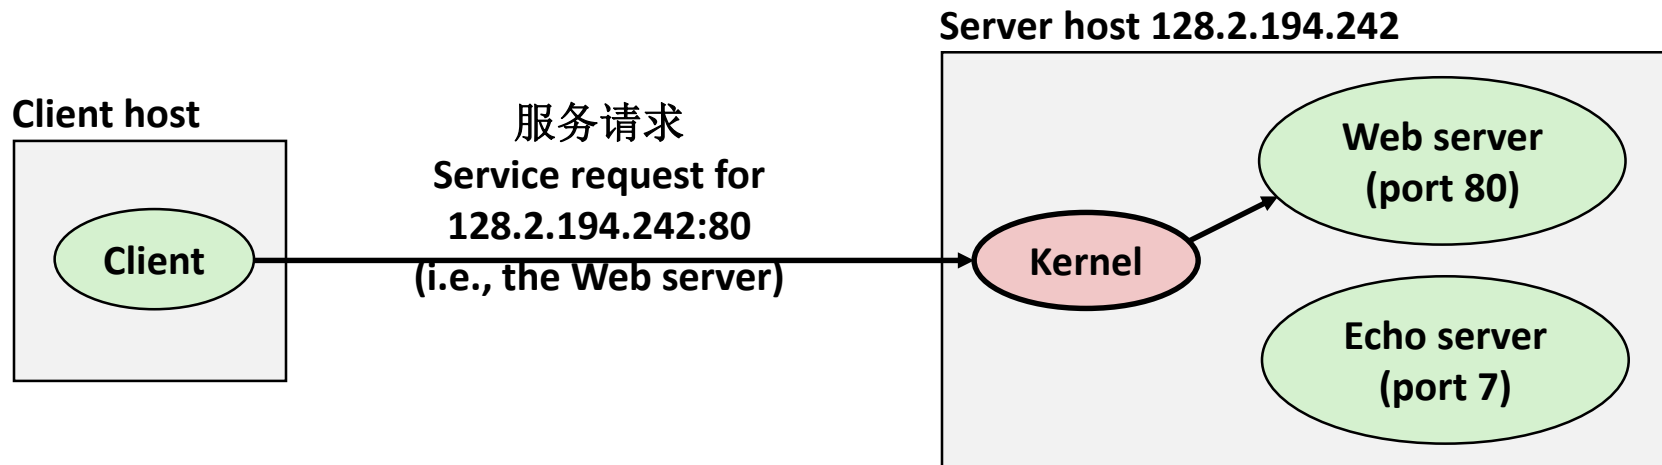
套接字接口 Sockets Interface

- 与**Unix I/O**结合使用的一组系统级函数，用于构建网络应用程序 **Set of system-level functions used in conjunction with Unix I/O to build network applications.**

- 创建于**80**年代早期，是最初的**Berkeley Unix**发行版的一部分，其中包含早期版本的互联网协议 **Created in the early 80's as part of the original Berkeley distribution of Unix that contained an early version of the Internet protocols.**

- 适用于所有现代系统 **Available on all modern systems**
  - Unix variants变体, Windows, OS X, IOS, Android, ARM

套接字 Sockets

- 什么是套接字？ **What is a socket?**
  - 对于内核来说，套接字是通信的端点 To the kernel, a socket is an endpoint of communication
  - 对于应用程序，套接字是一个文件描述符，它允许应用程序从网络读取/向网络写入 To an application, a socket is a file descriptor that lets the application read/write from/to the network
  - 使用FD抽象可以重用代码和接口 Using the FD abstraction lets you reuse code & interfaces

- 客户端和服务器通过读取和写入套接字描述符来相互通信 **Clients and servers communicate with each other by reading from and writing to socket descriptors**

```
   Client  ●◄──────────►● Server
   clientfd          serverfd
```
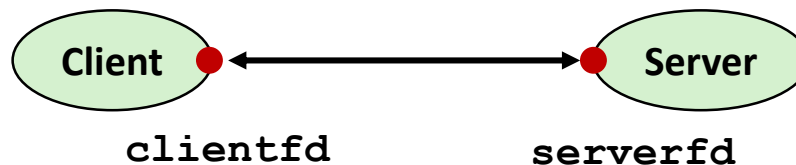
- 常规文件**I/O**和套接字**I/O**之间的主要区别是应用程序如何"打开"套接字描述符 **The main distinction between regular file I/O and socket I/O is how the application "opens" the socket descriptors**

套接字编程示例 Socket Programming Example

- 回声服务器和客户 **Echo server and client**
- 服务器 **Server**
  - 接受连接请求 Accepts connection request
  - 重复发送回输入行 Repeats back lines as they are typed
- 客户 **Client**
  - 请求连接到服务器 Requests connection to server
  - 重复 Repeatedly:
    - 从终端读一行 Read line from terminal
    - 发送给服务器 Send to server
    - 从服务器读响应 Read reply from server
    - 打印行到终端 Print line to terminal

回声服务器/客户会话示例
Echo Server/Client Session Example

客户 **Client**

```
bambooshark: ./echoclient whaleshark.ics.cs.cmu.edu 6616        (A)
This line is being echoed                                       (B)
This line is being echoed
This one is, too                                                (C)
This one is, too
^D
bambooshark: ./echoclient whaleshark.ics.cs.cmu.edu 6616        (D)
This one is a new connection                                    (E)
This one is a new connection
^D
```

服务器 **Server**

```
whaleshark: ./echoserveri 6616
Connected to (BAMBOOSHARK.ICS.CS.CMU.EDU, 33707)               (A)
server received 26 bytes                                        (B)
server received 17 bytes                                        (C)
Connected to (BAMBOOSHARK.ICS.CS.CMU.EDU, 33708)               (D)
server received 29 bytes                                        (E)
```

2. *启动客户*
Start client
Client

open_clientfd

1. *启动服务器*
Start server
Server

open_listenfd

回声服务器
+客户结构
Echo Server + Client Structure

连接请求
Connection request

等待客户的连接请求
Await connection request from client

accept

客户/
服务器
会话
Client / Server Session

3. *交换数据*
Exchange data

terminal read
socket write

socket read

socket read
terminal write

socket write

close

EOF

socket read

4. *释放客户连接*
Disconnect client

5. *删除客户*
Drop client

close

44

2. *启动客户*
Start client
Client

1. *启动服务器*
Start server
Server

回声服务器
+客户结构
Echo Server + Client Structure

`open_clientfd`

`open_listenfd`

连接请求
Connection request

等待客户连接请求
Await connection request from client

`accept`

客户/
服务器
会话
Client / Server Session

`fgets`
`rio_writen`

`rio_readlineb`

`rio_readlineb`
`fputs`

`rio_writen`

3. *交换数据*
Exchange data

`close`

EOF

`rio_readlineb`

4. *释放客户连接*
Disconnect client

`close`

5. *删除客户*
Drop client

回忆：无缓冲RIO输入/输出
Recall: Unbuffered RIO Input/Output

- 与Unix读写接口相同 Same interface as Unix `read` and `write`
- 特别适用于在网络套接字上传输数据 Especially useful for transferring data on network sockets

```
#include "csapp.h"

ssize_t rio_readn(int fd, void *usrbuf, size_t n);
ssize_t rio_writen(int fd, void *usrbuf, size_t n);
```

Return: num. bytes transferred if OK, 0 on EOF (`rio_readn` only), -1 on error

- **`rio_readn`仅在遇到EOF时返回不足值 `rio_readn` returns short count only if it encounters EOF**
  - 仅当您知道要读取多少字节时才使用它 Only use it when you know how many bytes to read
- **`rio_writen`从不返回不足值 `rio_writen` never returns a short count**
- 对**`rio_readn`和`rio_writen`**的调用可以在同一描述符上任意交错 Calls to `rio_readn` and `rio_writen` can be interleaved arbitrarily on

回忆：带缓冲RIO输入/输出
Recall: Buffered RIO Input Functions

■ 高效地从部分缓存在内部内存缓冲区中的文件中读取文本行和二进制数据 **Efficiently read text lines and binary data from a file partially cached in an internal memory buffer**

```
#include "csapp.h"

void rio_readinitb(rio_t *rp, int fd);

ssize_t rio_readlineb(rio_t *rp, void *usrbuf, size_t maxlen);
ssize_t rio_readnb(rio_t *rp, void *usrbuf, size_t n);
```

Return: num. bytes read if OK, 0 on EOF, -1 on error

- ▪ **rio_readlineb**从文件fd读最多**maxlen**字节文本行，并存储该行到**usrbuf rio_readlineb** reads a *text line* of up to **maxlen** bytes from file **fd** and stores the line in **usrbuf**
  - ▪ 特别适合从网络套接字读文本行 Especially useful for reading text lines from network sockets
- ■ 停止条件 Stopping conditions
  - ▪ 读取了最大字节 **maxlen** bytes read
  - ▪ 遇到文件结束符 EOF encountered
  - ▪ 遇到换行符（'\n'） Newline ('\n') encountered

回声客户：主例程 Echo Client: Main Routine

```c
#include "csapp.h"

int main(int argc, char **argv)
{
    int clientfd;
    char *host, *port, buf[MAXLINE];
    rio_t rio;

    host = argv[1];
    port = argv[2];

    clientfd = Open_clientfd(host, port);
    Rio_readinitb(&rio, clientfd);

    while (Fgets(buf, MAXLINE, stdin) != NULL) {
        Rio_writen(clientfd, buf, strlen(buf));
        Rio_readlineb(&rio, buf, MAXLINE);
        Fputs(buf, stdout);
    }
    Close(clientfd);
    exit(0);
}
```

                                                    echoclient.c

Echo Server + Client Structure

2. Start client
Client

1. Start server
Server

```
open_clientfd
```

```
open_listenfd
```

Connection request

Await connection request from client

```
accept
```

3. Exchange data

Client / Server Session

```
fgets
rio_writen
```

```
rio_readlineb
```

```
rio_readlineb
fputs
```

```
rio_writen
```

EOF

```
close
```

```
rio_readlineb
```

4. Disconnect client

5. Drop client

```
close
```
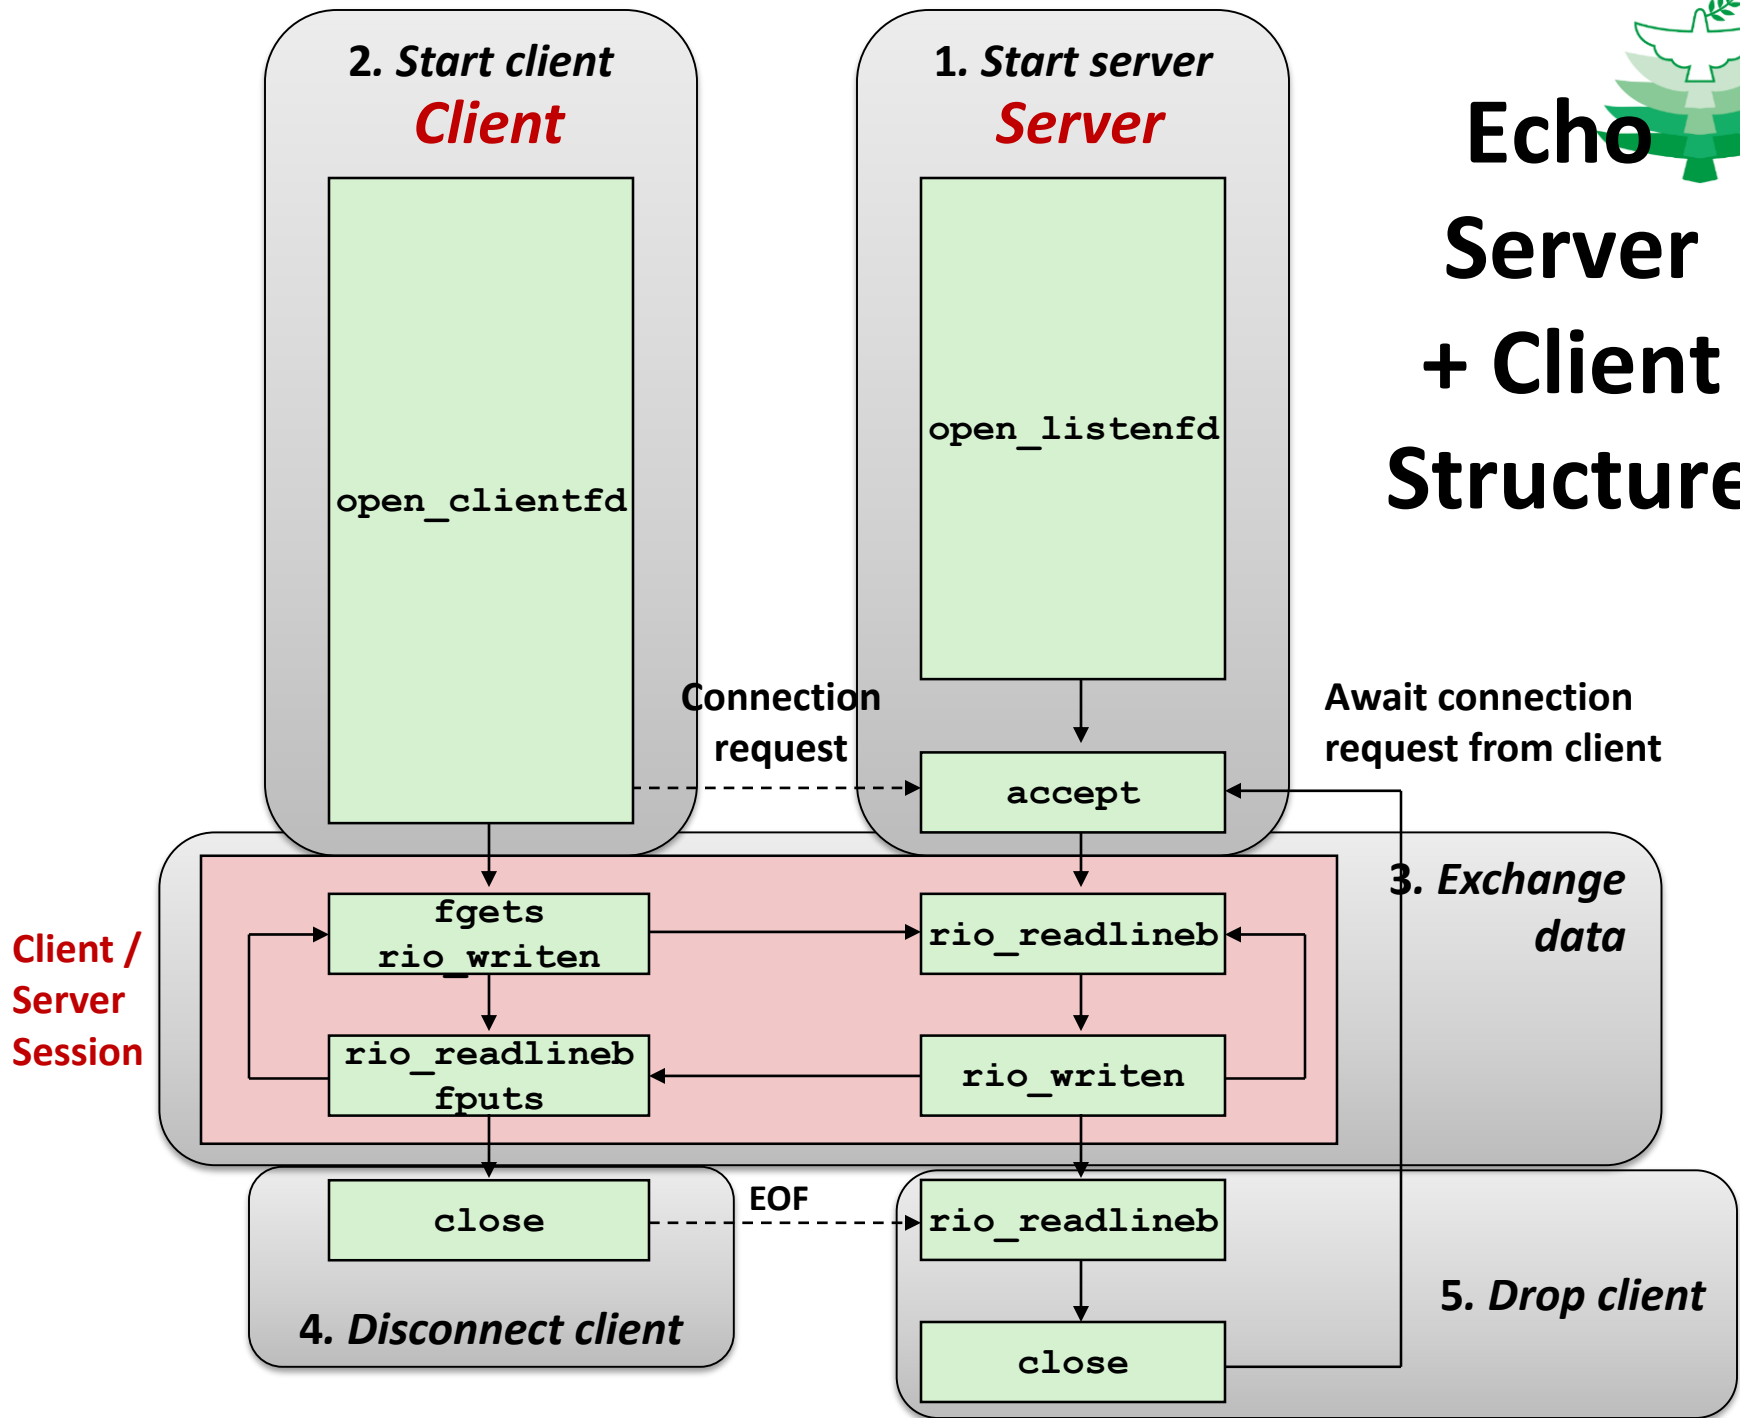
迭代回声服务器：主例程
Iterative Echo Server: Main Routine

```c
#include "csapp.h"
void echo(int connfd);

int main(int argc, char **argv)
{
    int listenfd, connfd;
    socklen_t clientlen;
    struct sockaddr_storage clientaddr;  /* Enough room for any addr */
    char client_hostname[MAXLINE], client_port[MAXLINE];

    listenfd = Open_listenfd(argv[1]);
    while (1) {
        clientlen = sizeof(struct sockaddr_storage); /* Important! */
        connfd = Accept(listenfd, (SA *)&clientaddr, &clientlen);
        Getnameinfo((SA *) &clientaddr, clientlen,
                    client_hostname, MAXLINE, client_port, MAXLINE, 0);
        printf("Connected to (%s, %s)\n", client_hostname, client_port);
        echo(connfd);
        Close(connfd);
    }
    exit(0);
}
```

echoserveri.c

回声服务器：echo函数
Echo Server: `echo function`

- 服务器使用**RIO**读取和回显文本行，直到遇到**EOF**（文件结束）条件 **The server uses RIO to read and echo text lines until EOF (end-of-file) condition is encountered.**

    - 客户端调用close(clientfd)导致的EOF条件 EOF condition caused by client calling `close(clientfd)`

```c
void echo(int connfd)
{
    size_t n;
    char buf[MAXLINE];
    rio_t rio;

    Rio_readinitb(&rio, connfd);
    while((n = Rio_readlineb(&rio, buf, MAXLINE)) != 0) {
         printf("server received %d bytes\n", (int)n);
        Rio_writen(connfd, buf, n);
    }
}
```
echo.c

套接字地址结构 Socket Address Structures

- **通用套接字地址 Generic socket address:**
  - 函数的地址参数 For address arguments to **connect**, **bind**, and **accept** *(next lecture)*
  - 之所以如此仅仅是因为在设计套接字接口时，C没有泛型（void*）指针 Necessary only because C did not have generic (**void ***) pointers when the sockets interface was designed
  - 为了强制转换方便，我们采用Stevens惯例： For casting convenience, we adopt the Stevens convention:

    ```
    typedef struct sockaddr SA;
    ```

    ```
    struct sockaddr {
      uint16_t  sa_family;    /* Protocol family */
      char      sa_data[14];  /* Address data   */
    };
    ```

`sa_family`

特定种类的地址 Family Specific

套接字地址结构 Socket Address Structures

- 互联网（**IPv4**）特定套接字地址 **Internet (IPv4) specific socket address:**
  - 必须强制转换，在函数使用套接字地址参数的时候 Must cast (`struct sockaddr_in *`) to (`struct sockaddr *`) for functions that take socket address arguments.

```
struct sockaddr_in  {
  uint16_t        sin_family;  /* Protocol family (always AF_INET) */
  uint16_t        sin_port;    /* Port num in network byte order */
  struct in_addr  sin_addr;    /* IP addr in network byte order */
  unsigned char   sin_zero[8]; /* Pad to sizeof(struct sockaddr) */
};
```


sin_port   sin_addr

| AF_INET | | | | | | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

sa_family

sin_family

特定种类地址 Family Specific
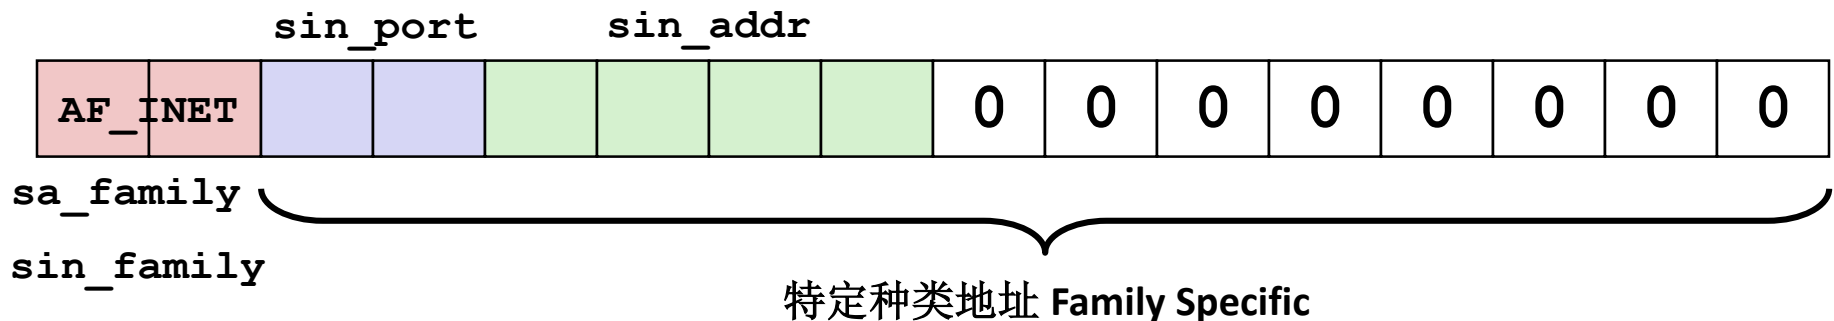
主机和服务转换：getaddrinfo
Host and Service Conversion: getaddrinfo

- **getaddrinfo是将主机名、主机地址、端口和服务名的字符串表示转换为套接字地址结构的现代方法 getaddrinfo is the modern way to convert string representations of hostnames, host addresses, ports, and service names to socket address structures.**
  - 替换过时的`gethostbyname`和`getservbyname`函数 Replaces obsolete `gethostbyname` and `getservbyname` funcs.

- 优势：**Advantages:**
  - 重入（可由线程程序安全使用） Reentrant (can be safely used by threaded programs).
  - 允许我们编写可移植的协议无关代码 Allows us to write portable protocol-independent code
    - 同时适用于IPv4和IPv6 Works with both IPv4 and IPv6

- 缺点 **Disadvantages**
  - 有点复杂 Somewhat complex
  - 幸运的是，在大多数情况下，少量的使用模式就足够了 Fortunately,

主机和服务转换：getaddrinfo
Host and Service Conversion: `getaddrinfo`

```
int getaddrinfo(const char *host,          /* Hostname or address */
                const char *service,        /* Port or service name */
                const struct addrinfo *hints,/* Input parameters */
                struct addrinfo **result);  /* Output linked list */

void freeaddrinfo(struct addrinfo *result);  /* Free linked list */

const char *gai_strerror(int errcode);       /* Return error msg */
```

- 给定主机和服务，**getaddrinfo**返回结果为指向**addrinfo**结构的链表，每个**addrinfo**结构指向对应的套接字地址结构，并且包含套接字接口函数的参数 **Given `host` and `service`, `getaddrinfo` returns `result` that points to a linked list of `addrinfo` structs, each of which points to a corresponding socket address struct, and which contains arguments for the sockets interface functions.**

- 助手程序函数： **Helper functions:**
  - `freeadderinfo` frees the entire linked list. 释放整个链表
  - `gai_strerror` converts error code to an error message. 将错误代码转换为错误消息

getaddrinfo返回的链表
Linked List Returned by `getaddrinfo`

result

addrinfo structs

Socket address structs

```
ai_canonname
ai_addr
ai_next
```

```
NULL
ai_addr
ai_next
```

```
NULL
ai_addr
NULL
```
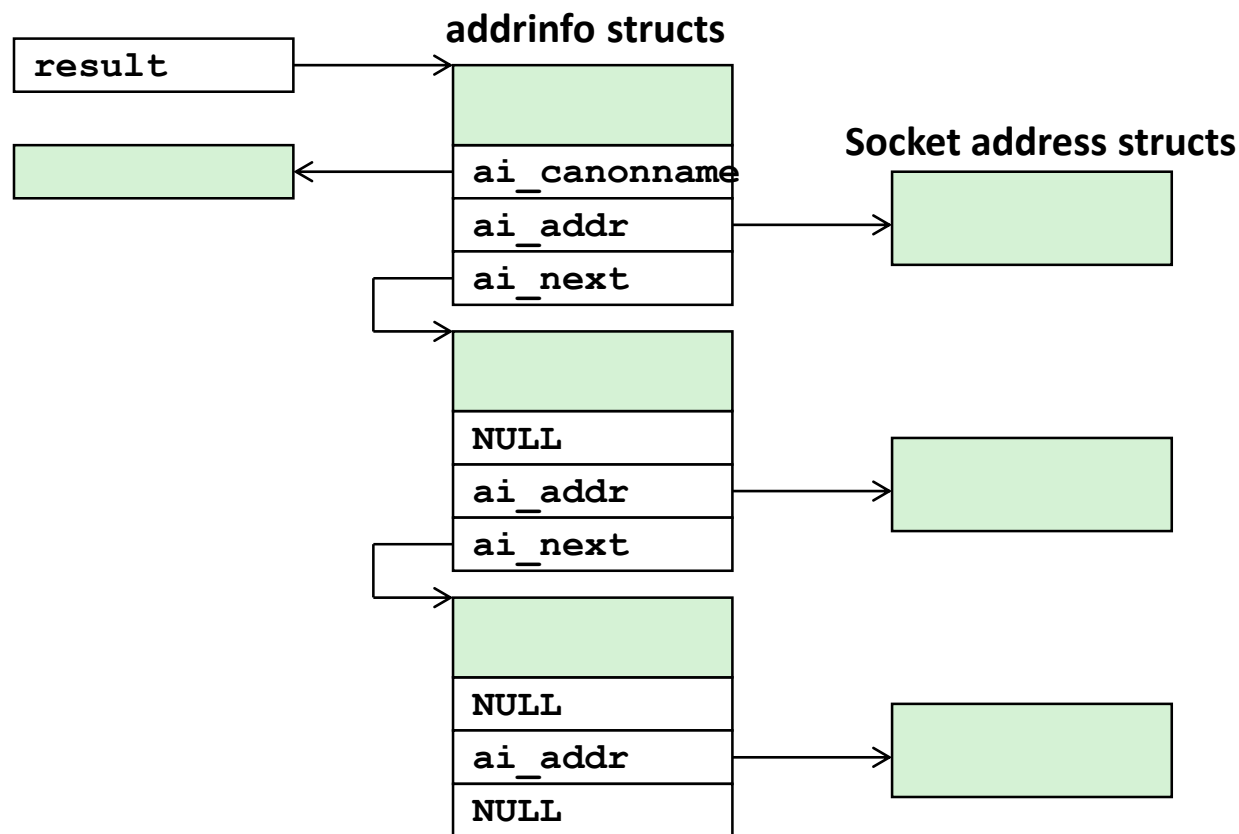
addrinfo结构 addrinfo Struct

```
struct addrinfo {
    int                 ai_flags;      /* Hints argument flags */
    int                 ai_family;     /* First arg to socket function */
    int                 ai_socktype;   /* Second arg to socket function */
    int                 ai_protocol;   /* Third arg to socket function  */
    char               *ai_canonname;  /* Canonical host name */
    size_t              ai_addrlen;    /* Size of ai_addr struct */
    struct sockaddr    *ai_addr;       /* Ptr to socket address structure */
    struct addrinfo    *ai_next;       /* Ptr to next item in linked list */
};
```

- 由**getaddrinfo**返回的每个**addrinfo**结构包含可以直接传递给套接字函数的参数 **Each addrinfo struct returned by getaddrinfo contains arguments that can be passed directly to `socket` function.**

- 它也会指向一个套接字地址结构，该结构可以直接传递给**connect**和**bind**函数 **Also points to a socket address struct that can be passed directly to `connect` and `bind` functions.**

(`socket`, `connect`, `bind` to be discussed next lecture下次课讨论这些函数)

主机和服务转换：**getnameinfo**
Host and Service Conversion: **getnameinfo**

- **getnameinfo**的功能与**getaddrinfo**的功能相反，它将一个套接字地址转换成对应的主机和服务 **getnameinfo** is the inverse of getaddrinfo, converting a socket address to the corresponding host and service.

  - 替代过时的gethostbyaddr和getservbyport函数 Replaces obsolete `gethostbyaddr` and `getservbyport` funcs.
  - 可重入和协议无关的 Reentrant and protocol independent.

```
int getnameinfo(const SA *sa, socklen_t salen, /* In: socket addr */
                char *host, size_t hostlen,    /* Out: host */
                char *serv, size_t servlen,    /* Out: service */
                int flags);                    /* optional flags */
```

转换示例 Conversion Example

```c
#include "csapp.h"

int main(int argc, char **argv)
{
    struct addrinfo *p, *listp, hints;
    char buf[MAXLINE];
    int rc, flags;

    /* Get a list of addrinfo records */
    memset(&hints, 0, sizeof(struct addrinfo));
 // hints.ai_family = AF_INET;      /* IPv4 only */
    hints.ai_socktype = SOCK_STREAM; /* Connections only */
    if ((rc = getaddrinfo(argv[1], NULL, &hints, &listp)) != 0) {
        fprintf(stderr, "getaddrinfo error: %s\n", gai_strerror(rc));
        exit(1);
    }
```

hostinfo.c

转换示例(续) Conversion Example (cont)

```c
    /* Walk the list and display each IP address */
    flags = NI_NUMERICHOST; /* Display address instead of name */
    for (p = listp; p; p = p->ai_next) {
        Getnameinfo(p->ai_addr, p->ai_addrlen,
                    buf, MAXLINE, NULL, 0, flags);
        printf("%s\n", buf);
    }


    /* Clean up */
    Freeaddrinfo(listp);


    exit(0);
}
                                                        hostinfo.c
```

运行hostinfo Running hostinfo

```
whaleshark> ./hostinfo localhost
127.0.0.1

whaleshark> ./hostinfo whaleshark.ics.cs.cmu.edu
128.2.210.175

whaleshark> ./hostinfo twitter.com
199.16.156.230
199.16.156.38
199.16.156.102
199.16.156.198

whaleshark> ./hostinfo google.com
172.217.15.110
2607:f8b0:4004:802::200e
```

下次课 Next time

- 使用**getaddrinfo**实现主机和服务转换 **Using getaddrinfo for host and service conversion**
- 编写客户和服务器 **Writing clients and servers**
- 编写**Web**服务器！ **Writing Web servers!**

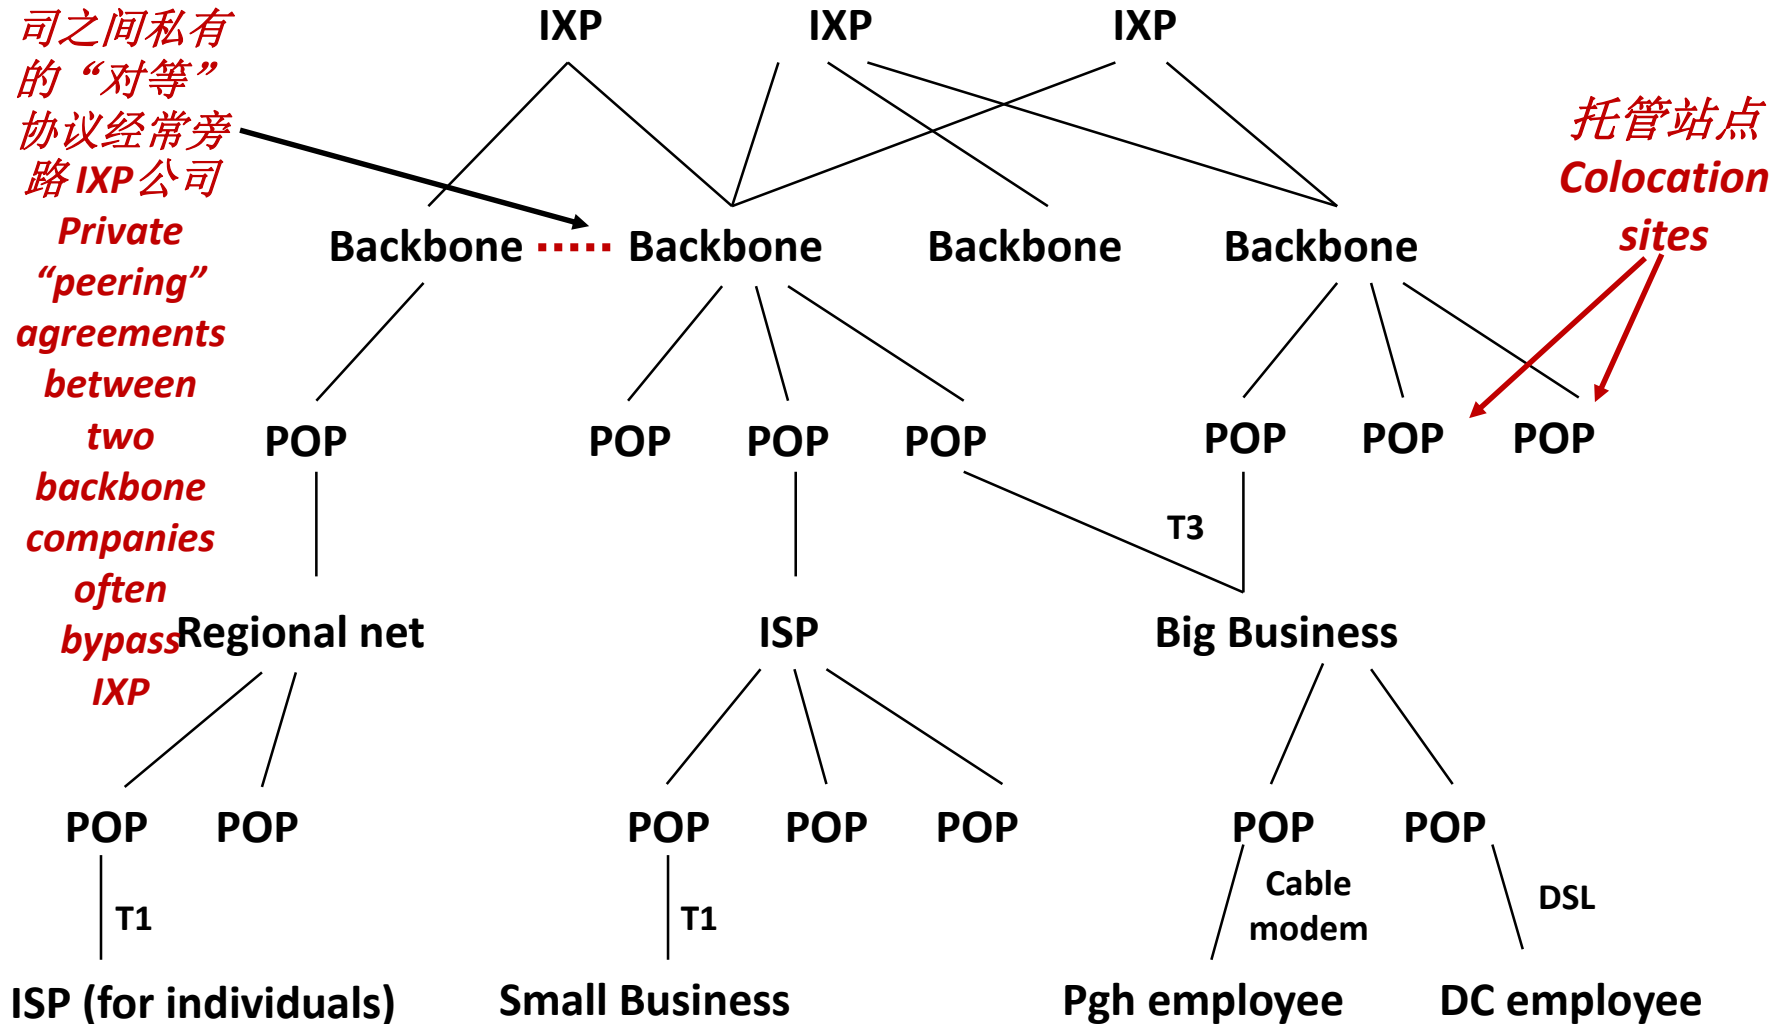# 附加的幻灯片 Additional slides

基本互联网组件 Basic Internet Components

- ## 互联网主干 Internet backbone:
  - 由高速点到点网络连接的路由器（国家或世界范围）集合collection of routers (nationwide or worldwide) connected by high-speed point-to-point networks

- ## 互联网交换点 Internet Exchange Points (IXP):
  - 连接多个主干的路由器（通常称为对等体）router that connects multiple backbones (often referred to as peers)
  - 又称网络接入点（NAP）Also called Network Access Points (NAP)

- ## 区域网络 Regional networks:
  - 覆盖较小地理区域的小型主干（例如城市或州）smaller backbones that cover smaller geographical areas
    (e.g., cities or states)

- ## 现场点 Point of presence (POP):
  - 连接到互联网的机器 machine that is connected to the Internet

- ## 互联网服务提供商 Internet Service Providers (ISPs):
  - 提供拨号或直接接入到POP provide dial-up or direct access to POPs

互联网连接层次结构 Internet Connection Hierarchy

两个主干公司之间私有的"对等"协议经常旁路IXP公司
Private "peering" agreements between two backbone companies often bypass IXP

托管站点
Colocation sites

IXP   IXP   IXP

Backbone ···· Backbone   Backbone   Backbone

POP   POP   POP   POP   POP   POP   POP

Regional net   ISP   Big Business

T3

POP   POP   POP   POP   POP   POP   POP

T1   T1   Cable modem   DSL

ISP (for individuals)   Small Business   Pgh employee   DC employee

IP地址结构 IP Address Structure

■ **IP(V4)地址空间分成类：IP (V4) Address space divided into classes:**

	0 1 2 3	8	16	24	31
A类 Class A	**0**	Net ID		Host ID	
B类 Class B	**1 0**		Net ID	Host ID	
C类 Class C	**1 1 0**		Net ID		Host ID
D类 Class D	**1 1 1 0**	组播地址 Multicast address			
E类 Class E	**1 1 1 1**	实验保留 Reserved for experiments			

■ 网络号记为**w.x.y.z/n**形式 **Network ID Written in form w.x.y.z/n**
  ▪ n为主机地址部分的位数 n = number of bits in host address
  ▪ 例如CMU记为： 128.2.0.0/16 E.g., CMU written as 128.2.0.0/16
    ▪ B类地址 Class B address

■ 不能路由的（私有）**IP**地址 **Unrouted (private) IP addresses:**
    10.0.0.0/8 172.16.0.0/12 192.168.0.0/16

互联网的演变 Evolution of Internet

- 原始思想 **Original Idea**
  - 互联网上的每个节点都有唯一的IP地址 Every node on Internet would have unique IP address
    - 每个人都可以直接与每个人交谈 Everyone would be able to talk directly to everyone
  - 无保密或认证 No secrecy or authentication
    - 消息对同一局域网上的路由器和主机均可见 Messages visible to routers and hosts on same LAN
    - 可能伪造分组首部中的源地址字段 Possible to forge source field in packet header

- 缺点 **Shortcomings**
  - 没有足够的IP地址可用 There aren't enough IP addresses available
  - 不希望每个人都能访问或了解所有其他主机 Don't want everyone to have access or knowledge of all other hosts
  - 安全问题要求保密和身份验证 Security issues mandate secrecy & authentication

互联网的演变：命名
Evolution of Internet: Naming

- 动态分配地址 **Dynamic address assignment**
  - 大多数主机不需要静态地址 Most hosts don't need to have known address
    - 仅用作服务器才需要 Only those functioning as servers
  - DHCP（动态主机配置协议） DHCP (Dynamic Host Configuration Protocol)
    - 本地ISP为临时使用分配地址 Local ISP assigns address for temporary use

- 例子： **Example:**
  - CMU的笔记本电脑（有线连接） Laptop at CMU (wired connection)
    - IP地址128.2.213.29（bryant-tp4.cs.cmu.edu） IP address 128.2.213.29 (`bryant-tp4.cs.cmu.edu`)
    - 静态分配 Assigned statically
  - 家里的笔记本电脑 Laptop at home
    - IP地址192.168.1.5 IP address 192.168.1.5
    - 仅在家庭网络内有效 Only valid within home network

互联网的演变：防火墙
Evolution of Internet: Firewalls

10.2.2.2
1
4
Firewall
176.3.3.3
2
3
216.99.99.99
公司**X Corporation X**
互联网 **Internet**
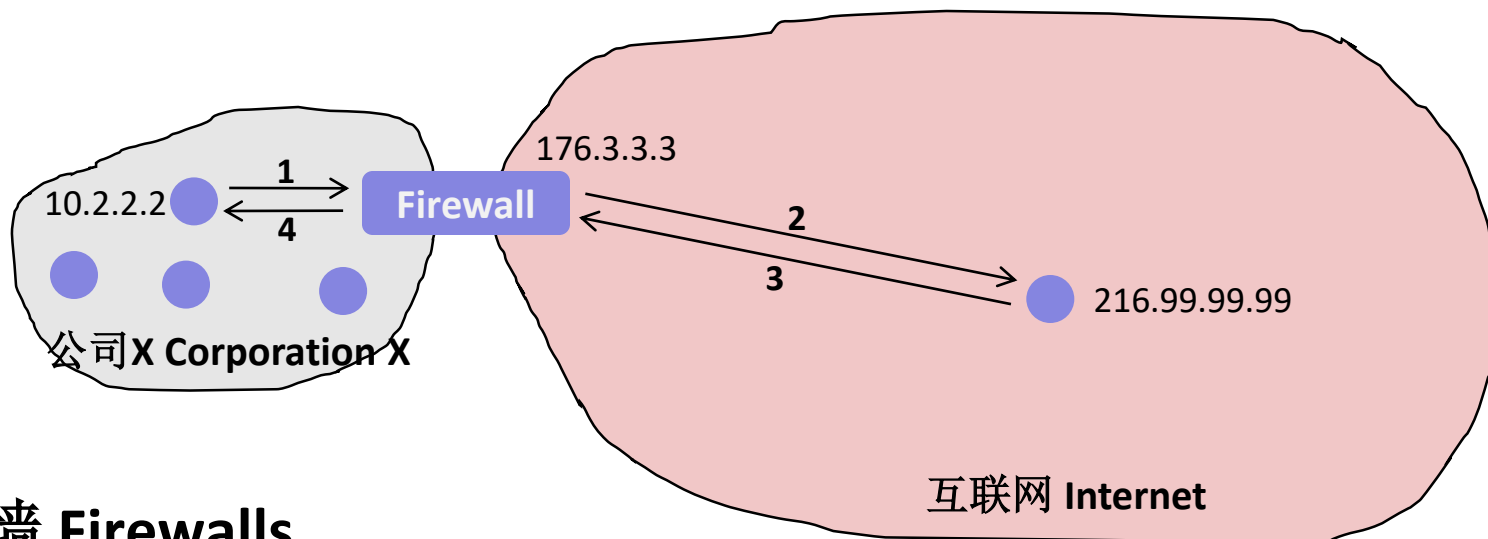
■ 防火墙 **Firewalls**

  ▪ 对互联网的其他部分隐藏组织节点 Hides organizations nodes from rest of Internet

  ▪ 在组织内使用本地IP地址 Use local IP addresses within organization

  ▪ 对于外部服务，提供代理服务 For external service, provides proxy service

    1. 客户端请求： Client request: src=10.2.2.2, dest=216.99.99.99
    2. 防火墙转发： Firewall forwards: src=176.3.3.3, dest=216.99.99.99
    3. 服务器响应： Server responds: src=216.99.99.99, dest=176.3.3.3
    4. 防火墙转发响应： Firewall forwards response: src=216.99.99.99, dest=10.2.2.2