



2024 Full Products

Illumination Connects the Future

LITEON[®]

Table of Contents

02	Empowering A Green Future
04	Creating Infinite Possibilities for a Bright Future
05	UV LED + Lighting LED
07	SMD LED
09	Automotive LED
12	LED Display
13	Through Hole Lamp
14	Optical Sensor
16	VCSEL ToF & Infrared Emitter & Receiver
19	Photocoupler
21	Worldwide Contacts


LITEON[®] Empowering A Green Future

A Legacy of Almost 50 Years

Founded in 1975, LITEON is a world-leading provider of opto-electronic semiconductor and power managements, which offer reliable advanced solutions powering cloud computing, automotive electronics, 5G, and AIoT.

Services Around the Globe

LITEON operates globally with manufacturing facilities across Asia, North and South America, which has a broad network of suppliers, partners, distributors, and customers worldwide.

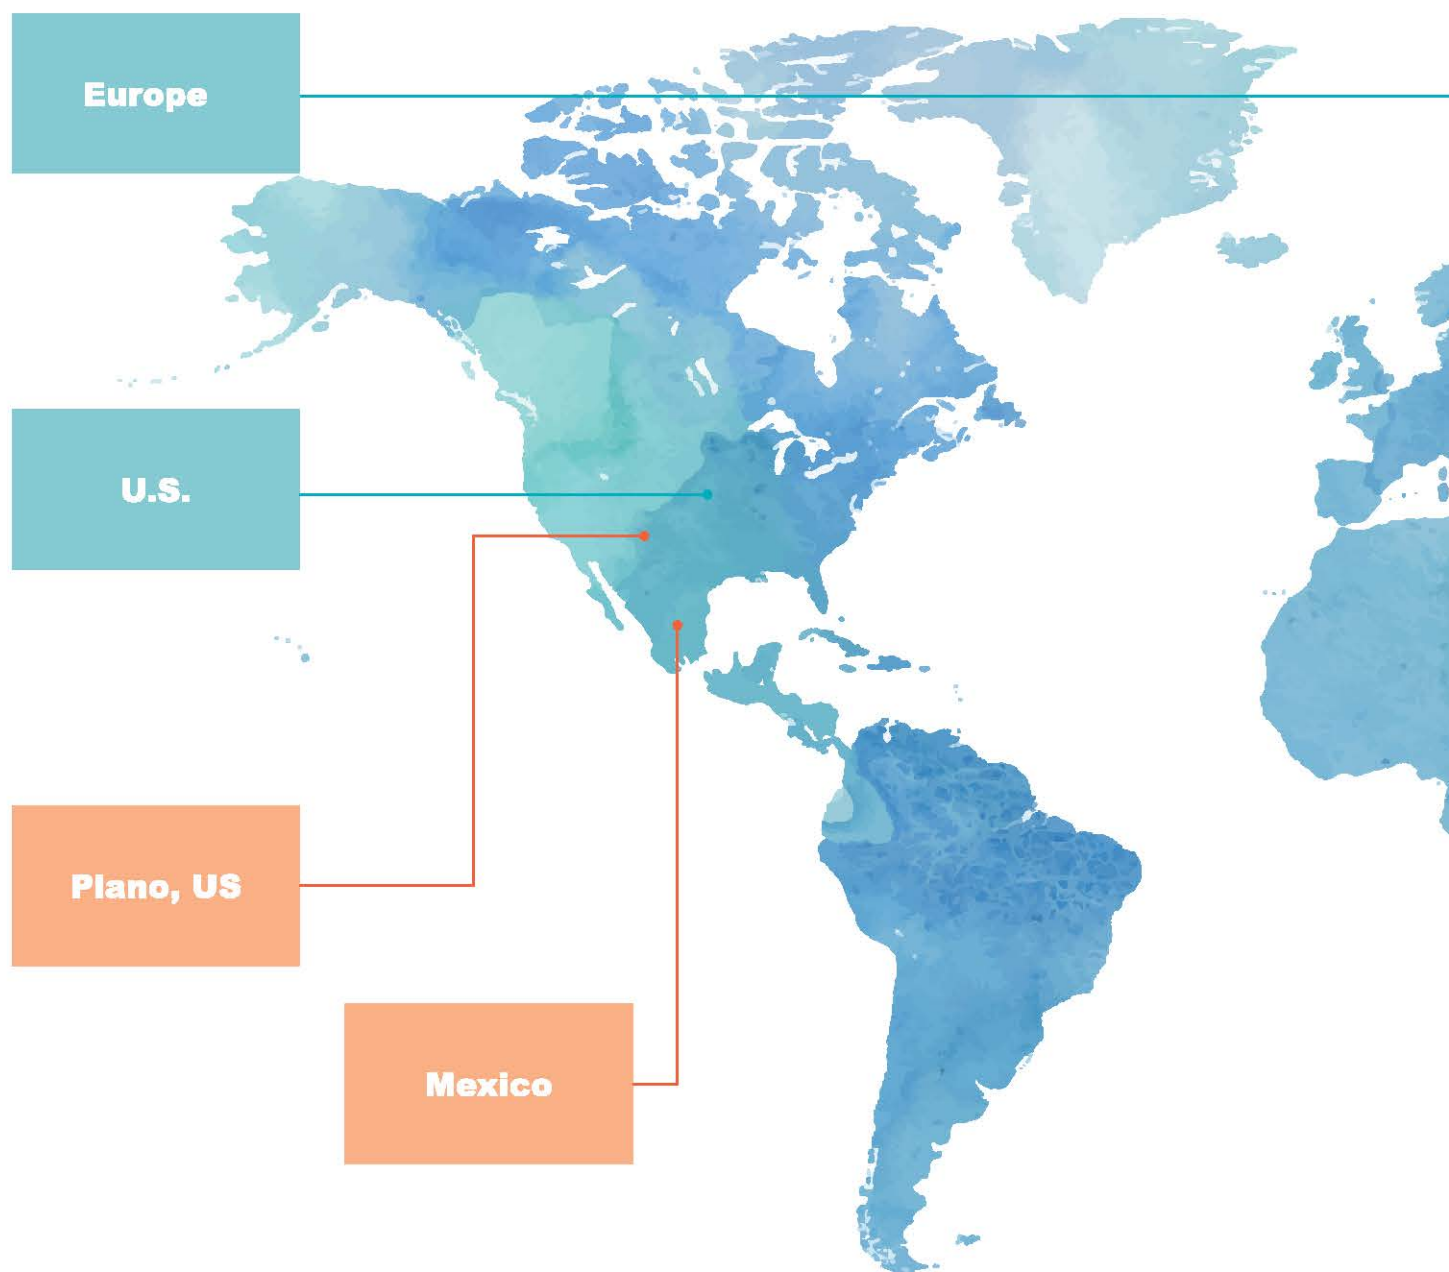


Solid Business Performance

LITEON offers a broad array of solutions to fulfill the ever-evolving market demands of our global customers, positioning us to reach the top global position in photocoupler shipments and rank as top 2 power supply provider with USD 5.7B revenue and strong profitable growth in 2022.

Global Sustainability Advocate

For decades, LITEON have been advocating socially and environmentally responsible corporate practices that reflect our core values. Our sustainable efforts have been acknowledged with inclusion in the MSCI ESG Leaders Indexes and Dow Jones Sustainability Indices for 9 and 12 consecutive years, respectively, as well as Prime Status by ISS ESG rating.

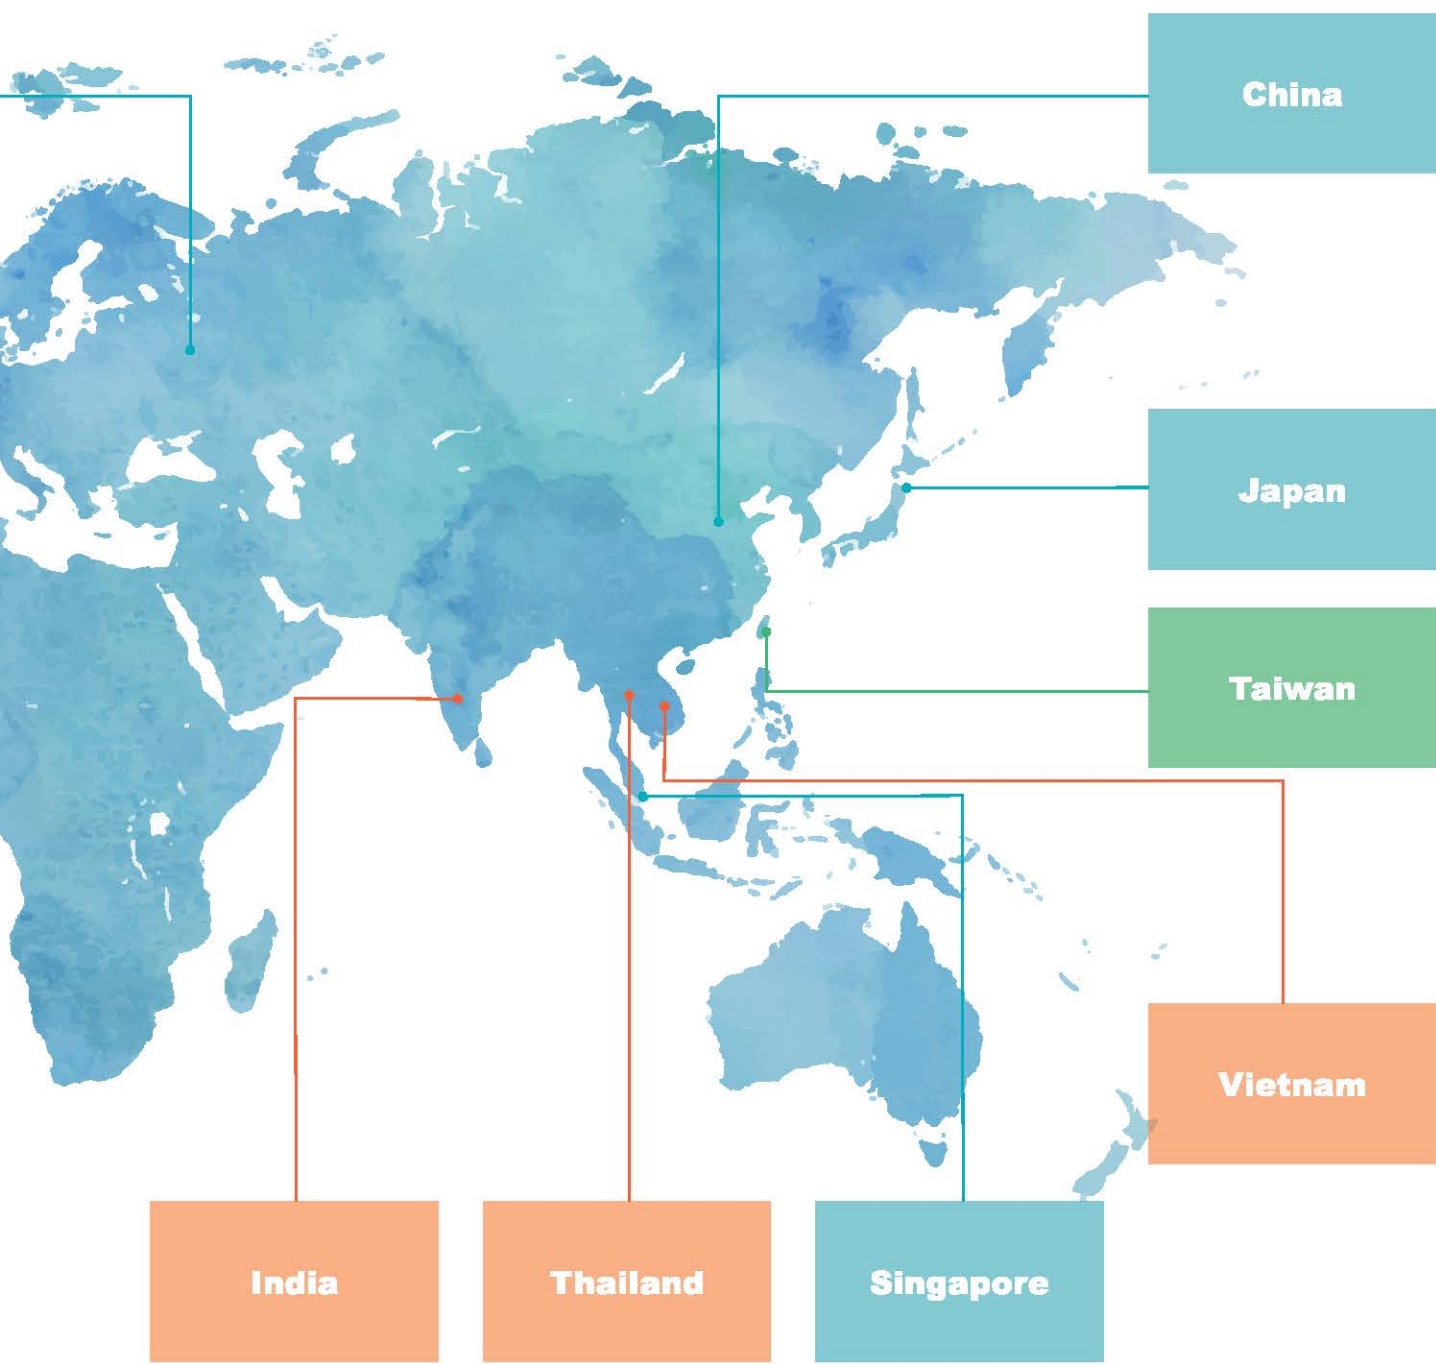



Creating Infinite Possibilities for a Bright Future




LITEON Optoelectronics Product Solution SBU (LITEON OPS) is a worldwide leading provider of optoelectronic semiconductors. Our leading role is backed by the broadest and most widely varying product offering in Optical technologies, ranging from illumination to sensing, from low power to high power, from commodity to custom-made, from LED to Laser, from visible lights to Infrared & UV.

As an experienced supplier in professional packaging designing and manufacturing, LITEON OPS not only has been able to provide customers with high-quality optoelectronic component solutions, but also has been constantly pursuing high-performance and low-pollutant light sources that make lives Smarter, Safer and Greener.

Together, we work to enrich lives and shape the future!



For more information, please visit us online at www.liteon.com/opto

UV LED


Ceramic UVA	LTPL-G16UVN	1.8(L)x1.8(W)x0.8(H)mm	Ceramic UVA	LTPL-G034UVG	3.45(L)x3.45(W)x2.1(H)mm
	• CSP-ceramic based. • Low power. • Miniature size package. • Long life time. • High efficiency. • Low CO2 consumption. • 365nm: 19mW at 20mA. • 385nm: 23mW at 20mA. • 405nm: 25mW at 20mA.	• Resin/ink curing. • Tooth whitening. • Money & ID detect. • Forensic applications. • Fluorescent light source.		• Ceramic based. • High power dome lens. • Higher WPE%. • Long life time. • High efficiency. • Low CO2 consumption. • 365nm: 1425mW at 700mA. • 385nm: 1480mW at 700mA. • 405nm: 1485mW at 700mA.	• Tanning. • Resin curing. • Tooth whitening. • Security, banknotes. • Forensic applications. • Fluorescent light source.
Ceramic UVA	LTPL-G038UVG	3.45(L)x3.45(W)x2.2(H)mm	Ceramic UVA	LTPL-S35	2.45(L)x4.45(W)x2.65(H)mm
	• Ceramic based. • High power dome lens. • Higher WPE%. • Long life time. • High efficiency. • Narrow view angle 55 degree. • 365nm: 1280mW at 700mA. • 385nm: 1365mW at 700mA. • 405nm: 1330mW at 700mA.	• Tanning. • Resin curing. • Tooth whitening. • Security, banknotes. • Forensic applications. • Fluorescent light source.		• Ceramic based. • Ultra-high power dome lens. • Higher WPE%. • Long life time. • High efficiency. • Low CO2 consumption. • S35FL view angle 120 degree. • S35FT view angle 90 degree. • S35CT view angle 30 degree. • 365nm: 1640mW at 1A.	• Resin curing. • Tooth whitening. • Forensic applications. • Fluorescent light source.
Ceramic UVC	LTPL-G035UVC	3.6(L)x3.5(W)x1.6(H)mm	Ceramic UVC	LTPL-W035UVC	3.6(L)x3.6(W)x1.6(H)mm
	• Ceramic based. • Quartz glass. • Long life time. • High efficiency. • Low CO2 consumption. • 2kV ESD protection • 275nm: 3mW at 20mA. • 275nm: 20mW at 100mA. • 275nm: 38mW at 180mA. • 275nm: 50mW at 350mA. • 275nm: 100mW at 500mA.	• Water sterilization. • Surface sterilization. • Air purification.		• Ceramic based. • Ultra-high power dome lens. • Long life time. • High efficiency. • Low CO2 consumption. • 275nm: 166mW at 800mA. • 275nm: 180mW at 700mA. • Highest quality and reliability. • IP68. • 2kV ESD protection.	• Water sterilization. • Surface sterilization. • Air purification.
Ceramic UVC	LTPL-G06UVC	3.0(L)x3.0(W)x1.3(H)mm	COB UVC	LTPL-M08	5.0(L)x5.0(W)x1.25(H)mm
	• Ceramic based. • Quartz glass. • Long life time. • High efficiency. • Low CO2 consumption. • 2kV ESD protection • 275nm: 155mW at 600mA.	• Water sterilization. • Surface sterilization. • Air purification.		• Ceramic based. • Ultra high mW per dollar solution • High efficiency. • Low CO2 consumption. • 2kV ESD protection • 275nm: 160mW at 460mA.	• Water sterilization. • Surface sterilization. • Air purification.

Lighting LED

Low Power Lighting	LTW-E004	1.6(L)x0.8(W)x0.8(H)mm	Low Power Lighting	LTW-2016	2.0(L)x1.6(W)x0.65(H)mm
	• Compact Size Topview PLCC package • CRI 70 for all CCTs. • CRI 80 90 is optional. • Wide selection of white CCT's. • Ideal for lighting applications requiring a homogeneous distributed light source. • Rich color fidelity • ANSI compatible chromaticity bins	• Linear light • Display • Indicator		• Compact Size Top View PLCC Package. • CRI 80 for all CCTs. • CRI 90 is optional. • Wide selection of white CCT's. • Ideal for lighting applications requiring a homogeneous distributed light source. • ANSI compatible chromaticity bins	• Linear light • Display • Indicator
Low Power Lighting	LTW-2214	2.8(L)x1.4(W)x1.3(H)mm	Low Power Lighting	LTW-K140	3.0(L)x1.4(W)x0.8(H)mm
	• Compact Size Topview PLCC package • CRI 80 for all CCTs. • CRI 90 is optional. • Wide selection of white CCT's. • Ideal for lighting applications requiring a homogeneous distributed light source. • ANSI compatible chromaticity bins	• Linear light • Display • Indicator		• Top view PLCC Package. • Efficiency: 125lm/W@0.2W. • CRI: 80 for all CCT • CRI 90 is optional. • Wide selection of white CCT's. • Compliance with ENERGY STAR program requirements for SSL luminaires. • Best flexible for modules in need of illuminance uniformity and circuit design. • Ideal for lighting applications requiring a homogeneous distributed light source. • ANSI compatible chromaticity bins • Rich color fidelity	• Linear light • Display • Indicator

Mid Power Lighting	LTW-2835	2.8(L)×3.5(W)×0.85(H)mm	• Efficiency: 140lm/W@0.6W. • 3V, 6V, 9V. • CRI 80 for all CCTs. • CRI 90 is optional. • Wide selection of white CCT's. • Compliance with ENERGY STAR program requirements for SSL luminaires. • Ideal for lighting applications requiring a homogeneous distributed light source. • Best choice for high efficiency platform. • Rich color flexibility • ANSI compatible chromaticity bins • Linear light • Ceiling light • Strip light • Bulb • Tube
			
Mid Power Lighting	LTW-5630	5.6(L)×3.0(W)×0.77(H)mm	• Efficiency: 190lm/W@0.2W. • 3V, 6V • CRI 80 for all CCTs. • CRI 90 is optional. • Wide selection of white CCT's. • Compliance with ENERGY STAR program requirements for SSL luminaires. • Ideal for lighting applications requiring a homogeneous distributed light source. • Best choice for high efficiency platform. • Linear light • Ceiling light • Strip light • Bulb • Tube
			
white LED	LTW-010	3.8(L)×0.9(W)×0.4(H)mm	• Side view PLCC package. • High brightness • Special color for chosen: ice-blue, Sky-blue, Tiffany, Amber, Purple. • Backlight • Indicator
			
white LED	LTW-012	4.2(L)×0.9(W)×0.46(H)mm	• Side view PLCC package. • High brightness. • Low power consumption. • Backlight • Indicator
			
RGB LED	LTW-008RGB2	4.8(L)×1.26(W)×0.8(H)mm	• Side view PLCC package. • High brightness. • Rich color flexibility • RGB white binning • Ambient light • Display • Indicator
			
RGB LED	LTW-010RGB	3.8(L)×0.9(W)×0.43(H)mm	• Side view PLCC package. • High brightness. • Rich color flexibility • RGB white binning • Narrow slim thickness • Ambient light • Display • Indicator
			
RGBW LED	LTW-B1010RGBN	1.0(L)×1.0(W)×0.85(H)mm	• Top view PLCC package. • High brightness, low power consumption. • Rich color flexibility • Black PKG. • Ambient light • Display • Indicator • Signboard
			
RGB LED	LTW-0B1921RGBN	2.1(L)×2.1(W)×1.68(H)mm	• Top view PLCC package. • High brightness, low power consumption. • Rich color flexibility • Black surface • Ambient light • Display • Indicator • Signboard
			
RGBW LED	LTW-Q35RGBW	3.6(L)×3.2(W)×0.86(H)mm	• Top view PLCC package. • High brightness • Rich color flexibility • Nature white to solve RGB-white color uneven in light guide tube. • Ambient light • Display • Indicator
			
RGB LED	LTW-0B1515RGBN	1.6(L)×1.54(W)×1.56(H)mm	• Top view PLCC package. • Smaller size. • High brightness, low power consumption. • Rich color flexibility • Black surface • Ambient light • Display • Indicator • Signboard
			
RGB LED	LTW-Q35ZRGB	3.5(L)×3.2(W)×0.86(H)mm	• Top view PLCC package. • High brightness. • Rich color flexibility. • Ambient light • Display • Indicator
			
RGB LED	LTPL-P033RGB	7.4(L)×6.0(W)×1.3(H)mm	• Top view PLCC package. • 1W high power RGB • Good thermal management • Ambient light • Display • Indicator
			

SMD LED

SMD Chip IC Embedded	LTST-E133	1.3(L)×1.3(W)×0.4(H)mm	SMD Chip IC Embedded	LTST-S313	3.2(L)×1.5(W)×1.0(H)mm
	• Top view IC built-in solution. • Available at 5mA and 12mA. • Simplified PCB design. • Free passive component. • Saving SMT & maintain cost. • Better consistency of color mixing. • Extreme small power consumption.	• Consumer devices. • LED decorative lighting. • Display lights. • Signal and symbol luminary.		• Side view IC built-in solution. • Available at 5mA and 12mA. • Ultra Bright InGaN / AlInGaP Chip LED. • 3 channel output with 8 Bits IC driver. • Each of the colors can achieve 256 brightness steps and scan frequency is no less than 100 KHz.	• Gaming backlighting. • Display. • Indicator lights for portable devices.
SMD Chip IC Embedded	LTST-S203	2.0(L)×1.0(W)×0.5(H)mm	SMD Chip IC Embedded	LTST-C19M	1.5(L)×1.5(W)×0.5(H)mm
	• Smallest side view IC built-in solution. • Available at 5mA. • Ultra Bright InGaN / AlInGaP Chip LED. • 3 channel output with 8 Bits IC driver. • Each of the colors can achieve 256 brightness steps and scan frequency is no less than 100 KHz.	• RGB keypad and keyboard backlight. • Display. • Indicators of portable devices.		• Top View 0606 RGB LED. • RGB independent control. • Wide viewing angle of 120°.	• Keyboard Backlight. • Indicator lights for gaming applications. • Peripherals.
SMD Chip IC Embedded	LTST-F802T/LTW-F802T	1.8(L)×0.68(W)×0.2(H)mm	SMD Chip IC Embedded	LTST-S33F	3.0(L)×1.0(W)×0.4(H)mm
	• Smallest side view ultra-thin single color LED. • Ultra-compact side-view product supporting ultra-bright performances. • Wide viewing angle of 120°. • Available in a variety of colors.	• Consumer devices. • Keypad backlight. • Micro display. • Keyboard backlight.		• Side view RGB LED. • 4 pin required by triple function design. • Wide viewing angle of 130°.	• Mobile keypad backlight. • Keyboard backlight.
SMD Chip IC Embedded	LTST-FC03/LTW-FC03	0.8(L)×0.3(W)×0.2(H)mm	SMD Chip LED	LTST-C281	1.0(L)×0.5(W)×0.25(H)mm
	• Top View 0201 Ultra-thin single color LED. • High brightness and compact size Chip LED. • Thin-sized chiplet. • Available in a variety of colors.	• Consumer devices. • Keypad backlight. • Micro display. • Keyboard backlight.		• Top View 0402 Ultra-thin single color LED. • Ultra-compact package size suitable for high resolution matrix applications. • Wide viewing angle of 130°. • Available in a variety of colors.	• Mobile keypad backlight. • Compact mobile equipment. • Display.
SMD Mini Chip LED RGBW	LTST-FC12	1.2(L)×1.2(W)×0.4(H)mm	SMD Chip LED Dual Color	LTST-S225 / LTW-S225	2.0(L)×1.1(W)×0.8(H)mm
	• Top View 0505 RGBW 4-in-1 LED. • Tunable white at any color temperature.	• Gaming backlight. • Micro display. • Consumer devices.		• Side View 1208 Bi-Color LED. • Smallest side view bi-color package. • Wide viewing angle 130°.	• Consumer devices. • Networking indicator lights.
SMD Chip Full Color	LTST-C25T	3.2(L)×1.2(W)×1.1(H)mm	SMD Mini Chip Full Color	LTST-FC10	1.0(L)×1.0(W)×0.18(H)mm
	• Reverse mount RGB. • Space-efficient design. • Wide viewing angle of 120°.	• RGB keyboard backlight. • Peripherals.		• Top View 0404 RGB LED. • The ultra-thin of full-color type. • High brightness.	• Keypad/keyboard backlighting. • Full color micro display.
SMD Mini Chip Full Color	LTST-F863H	1.8(L)×0.64(W)×0.3(H)mm	SMD Chip LED	LTST-C232 / LTW-C232	2.2(L)×1.2(W)×0.3(H)mm
	• World's smallest side view Tri-Color LED. • Full-color type LED. • High brightness.	• Mobile keypad backlight. • Keyboard backlight. • Ultra-thin space backlight.		• The ultra-thin reverse mount single color LED. • High brightness. • Available in a variety of colors.	• Keyboard or keypad backlight. • Display. • LED icon touch. • Reinforced glass panel.

SMD PLCC Full color 	E082 / N082 / N083 / G083 • PLCC4/ PLCC8. • White diffused lens. • PLCC4 Black face option available. • Dual color option available. • Designed for electronic sign use. • Available in a variety of colors and luminance selection.	3.5(L)x2.8(W)x1.9(H)mm • Consumer electronics backlight. • Status indicator. • Decorative lighting. • Automotive lighting.
SMD PLCC 	T680 / B680 • PLCC2. • White diffused lens. • White face option available. • Designed for electronic sign use. • Available in all different colors upon request.	3.5(L)x2.8(W)x1.9(H)mm • Message signs. • Automotive lighting.
SMD Mini PLCC 	E142 / E143 • PLCC4. • White diffused lens. • Designed for high temperature use. • Available in all different colors upon request.	1.8(L)x1.95(W)x0.8(H)mm • Full color display. • Networking. • Automotive lighting. • Charger station. • High-end home appliances.
SMD Mini PLCC RGB IC 	E133C • PLCC4. • White diffused lens. • IC built-in solution. • Free passive component. • Saving SMT & maintain cost. • Better consistency of color mixing. • Extreme small power consumption.	1.8(L)x1.95(W)x0.8(H)mm • Charger station. • High-end home appliances. • LED decorative lighting. • Curtain display.
SMD Mini S/V PLCC 	S04 • PLCC2. • Transparent lens. • Designed for High temperature use. • Available in all different colors upon request.	2.9(L)x1.6(W)x0.43(H)mm • Networking. • Automotive lighting. • Gaming keyboard. • High-end home appliances.
SMD S/V PLCC RGBW 	S06W • PLCC8 4-in-1 four color solution. • White diffused lens. • Brightest side view product. • Available in all different colors upon request. • Four color to solve RGB-white color uneven issue.	4.5(L)x1.5(W)x0.64(H)mm • Networking. • Automotive lighting. • High-end home appliances.
SMD Power Flash 	LTPL-C0675 / LTPL-C0677 • High flux density with compact light emitting source. • Rated 1.5A max pulse current. • Typical luminous flux: 240lm@1A. (LTPL-C0675) 260lm@1A. CR80 (LTPL-C0677), 240lm@1A CR 80 (LTPL-C0677)	2.8(L)x1.8(W)x0.75(H)mm • Camera phone. • Handheld device. • Barcode light source.
SMD PLCC Full color 	N213 / E213 • PLCC4. • White diffused lens. • White-face option available. • Designed for electronic signage use.	2.1(L)x2.1(W)x1.0(H)mm • Gaming backlighting. • Display. • Indicators lights for portable devices.
SMD Mini PLCC 	T180 • PLCC2. • Transparent lens. • White face option available. • Designed for high temperature use. • Available in all different colors upon request.	1.8(L)x0.8(W)x0.55(H)mm • Networking. • Automotive lighting. • Charger station.
SMD Mini PLCC 	G163 • PLCC4. • Transparent lens. • Designed for high temperature use. • Designed for gaming keyboard per-key with high brightness for power saving. • Available in all different colors upon request.	1.8(L)x1.95(W)x0.8(H)mm • Full color display. • Networking. • Automotive lighting. • Gaming keyboard. • High-end home appliances.
SMD PLCC RGB IC 	G333C • PLCC8. • White diffused lens. • IC built-in solution. • Free passive component. • Saving SMT & maintain cost. • Better consistency of color mixing. • Extreme small power consumption. • Supports breakpoint continuous transmission.	3.5(L)x1.9(W)x0.8(H)mm • Consumer electronics with LED illumination. • LED decorative lighting. • Curtain display.
SMD S/V PLCC 	O08 • PLCC8. • White diffused lens. • Designed for high temperature use. • Brightest side view product. • Available in all different colors upon request.	4.8(L)x1.0(W)x0.9(H)mm • Networking. • Automotive lighting. • Keyboard backlight.
SMD Mini CSP 	LTW-A031A/LT8T-A031A • Ultimate Q201 thickness lead thinnest QD. • Wide viewing angle 164°x137°. • 5 times brighter than conventional chip LED. • Saving half power consumption in system. • Maximum driving current 20mA. • White, Red, Green, Blue are available.	3.8(L)x0.3(W)x0.15(H)mm • Mobile keypad backlight. • Keyboard backlight. • Indicator.
SMD Power Flash 	LTPL-C0613 • High brightness in PCT type for high power application. • Ultra-thin 3018 solution. Rated 600mA max pulse current. • Typical luminous flux 105lm@ 600A.	2.8(L)x1.8(W)x0.58(H)mm

SMD Mini CSP	LT6T-AS7RGB	3.7(L) x 2.4(W) x 0.15(H)mm	SMD Power Flash	LTPL-A138D	1.4(L) x 1.4(W) x 0.25(H)mm
	• Ultimate thickness RGB LED lead thinnest QD • 3 times brighter than conventional chip LED • Saving half power consumption in system • Maximum driving current 30mA	• Mobile keypad backlight • Keyboard backlight • Indicator lights		• Smaller size with compact light emitting source • Ultimate thin package is suitable for front and back flash application • Rated 1.5A max pulse current • High CRI: 80, 90 for all CCT • Typical luminous flux: C1000: 245lm @ 1A; C1000: 210lm @ 1A	• Camera phone • Handheld device • Barcode light source

Automotive LED

SMD Chip LED	LT8A-C191	1.8(L) x 0.8(W) x 0.55(H)mm	SMD PLCC LED	LT8A-E607	1.8(L) x 0.75(W) x 0.55(H)mm
	• Top View ChipLED • Based on AEC-Q101D • Ultra-compact makes a high degree of expressiveness for use in high resolution, high density matrix applications • Wide viewing angle 120° • Available in a variety of colors	• Automotive indicator		• Top View PLCC LED • Clear lens • Based on AEC-Q101D • Designed for automotive application • Available in a variety of color • View angle 120° • Operation Temp 110° C • MSL 2a	• Automotive interior solution • Switch, Dashboard
Mini Top LED	LT8A-M97	2.3(L) x 1.4(W) x 1.5(H)mm	SMD PLCC 2	LT8A-T600	3.5(L) x 2.9(W) x 1.5(H)mm
	• MiniTOP LED • White diffused lens • Based on AEC-Q101D • Designed for automotive application • Available in a variety of color • View angle 120° • Operation Temp 110° C • MSL 2a	• Automotive interior solution • Switch, Dashboard, Sign Mark solution		• PLCC2 • White diffused lens • Based on AEC-Q101D • Designed for automotive application • Available in a variety of color • View angle 120° • Operation Temp 100° C • MSL 2a	• Automotive interior solution • Automotive sign mark solution
SMD PLCC 4	LT8A-E67R	5.8(L) x 2.9(W) x 1.5(H)mm	SMD PLCC 6	LT8A-Q66	3.4(L) x 3.9(W) x 1.5(H)mm
	• PLCC4 • White diffused lens • Based on AEC-Q102 • Designed for automotive application • Available in a variety of color • View angle 120° • Operation Temp 100° C • MSL 2a	• Automotive CHMSL • Automotive RCL		• PLCC6 • Clear lens • Based on AEC-Q102 • Designed for automotive application • Available in a variety of color • View angle 120° • Operation Temp 110° C • MSL 2 • Junction Temp 125° C max	• Automotive Turning Light • Automotive RCL
PLCC RGB	LT8A-Q38T	5.4(L) x 3.5(W) x 1.5(H)mm	PLCC RGB	LT8A-S006	4.8(L) x 3.2(W) x 0.9(H)mm
	• TOP PLCC RGB • White diffused lens • Based on AEC-Q102 • Designed for automotive application • Available in full color • View angle 120° • Operation Temp 110° C • MSL 2a • Junction Temp 125° C max	• Automotive interior solution • Switch, Dashboard, Sign Mark solution		• Side view PLCC RGB • White diffused lens • Based on AEC-Q102 • Designed for automotive application • Available in full color • View angle 120° • Operation Temp 100° C • MSL 2a • Junction Temp 125° C max	• Automotive interior solution • Switch, Dashboard, Sign Mark solution
Chip RGB	LT8A-S33H	5.0(L) x 1.0(W) x 0.5(H)mm	Power LED	LT8A-S835	3.5(L) x 2.9(W) x 0.5(H)mm
	• Side view Chip RGB • Clear lens • Based on AEC-Q101D • Designed for automotive application • Available in full color • View angle 120° • Operation Temp 100° C • MSL 2a	• Ambient light		• PLCC 0.6W • Based on AEC-Q101D • 24lm@30mA (CCT 4500K) • 62lm@150mA (CCT 6500K) • View angle 120° Operation Temp 105° C • MSL 2a • Junction Temp 125° C max	

Power LED	LTPA-C35	3.45(L)x3.45(W)x2.15(H)mm	• Chip on Ceramic 3535. • LED with optical lens. • 90lm@350mA. (PC Amber) • 135lm@350mA. • 235lm@700mA. (white color) • Automotive aftermarket eg: DRL, Reading light. • View angle 118°. • Operation Temp 125° C. • MSL 2. • Junction Temp 145° C max.	• Automotive DRL, TL. • Automotive Working Lamp.
Power LED	LTPA-S38	3.95(L)x3.8(W)x0.7(H)mm	• Vertical chip on EMC 3535. • Low Voltage Solution. • 55lm@350mA. (Red) • Slim Design • Black Package for High Stability • View angle 120° • Operation Temp 125° C • MSL 2. • Junction Temp 150° C max.	• Automotive RCL, CHMSL.
Power LED	LTPA-2720	2.75(L)x2.0(W)x0.8(H)mm	• Slim Design. • High Brightness. • Power 0.5-2.5W. • Based on AEC-Q102. • 80lm@200mA. (CCT 6500K) • 35lm@180mA. (PC Amber) • 40lm@200mA.(Red) • 120lm@350mA. (CCT 5500K) • 60lm@300mA. (PC Amber) • 82lm@350mA.(Red) • 230lm@700mA. (CCT 5500K) • 122lm@800mA. (PC Amber) • 100lm@700mA.(Red) • View Angle 120°. • Low Thermal Resistant. • Low Voltage Solution. • Operation Temp 125° C. • MSL 2. • Junction Temp 150° C max.	• Automotive RCL, CHMSL, DRL, TL.
HEAD LAMP(1chip)	LTPA-H1N	1.95(L)x1.91(W)x0.75(H)mm	• Slim design. • High brightness. • Based 345lm on AEC-Q102. • 200lm@1000mA. (PC Amber) • 345lm@1000mA. (CCT 5500K) • 3.25v @1000mA. • View Angle 120°. • Low thermal resistant. • Low voltage solution. • Operation temp 125° C. • MSL 2. • Junction temp 150° C max.	• Automotive Headlamp, High/Low Beam solutions.
PLCC RGB	LT3A-3830EGBWU	3.0(L)x3.0(W)x0.7(H)mm	• MiniTOP CSP LED • Base on AEC-Q102 • View angle 120° • MSL 2 • High brightness • RGB/3 Independent current circuit design.	• Automotive interior ambient lighting
HEAD LAMP(2 chip)	LTPA-H2L	2.75(L)x2.0(W)x0.85(H)mm	• Slim design. • High brightness. • Based on AEC-Q102. • 400 lm@1000mA. (CCT 5500K) • 200lm@1000mA. (PC Amber) • 3.25v @1000mA.(Single light) • View angle 120°. • Low thermal resistant. • Low voltage solution. • Operation temp 125° C. • MSL 2. • Junction temp 150° C max.	• Automotive DRL, TL.
HEAD LAMP(2 chip)	LTPA-H2L	2.75(L)x2.0(W)x0.85(H)mm	• Slim design. • High brightness. • Based 80lm on AEC-Q102. • 80 lm@200mA. (CCT 6500K) • 46lm@200mA. (PC Amber) • 3.1v @200mA.(Single light) • View angle 120°. • Low thermal resistant. • Low voltage solution. • Operation temp 125° C. • MSL 2. • Junction temp 150° C max.	• Automotive DRL, TL.
HEAD LAMP(3 chip)	LTPA-H3S	4.2(L)x3.75(W)x0.85(H)mm	• Slim Design. • High Brightness. • Based on AEC-Q102. • 1080lm@1000mA. (CCT 6500K) • 10.25v @1000mA. • View Angle 120°. • Low Thermal Resistant. • Low Voltage Solution. • Operation Temp 125° C. • MSL 2. • Junction Temp 150° C max.	• Automotive Headlamp, High/Low Beam solutions.

HEAD LAMP(2 chip)**LTSA-AM102P-1**25.67 $\times$ 15.82(W) $\times$ 0.92(H) mm

- Slim Design.
- High Brightness.
- Based on AEC-Q102.
- View Angle 120°.
- Low Thermal Resistant.
- Low Voltage Solution.
- Operation Temp 125° C.
- MSL 2.
- Junction Temp 165° C max.
- Automotive ADB

RGB+HC**LTSA-E271**2.70 $\times$ 2.70(W) $\times$ 0.80(H) mm

- Ultra Bright InGaN / AlInGaP LED Chips
- Thin (0.85 mm) Chip LED and EIA STD Package
- Preconditioning: Accelerate to JEDEC Level 2a
- 8 Bits 3 Channels IC.Embedded
- Global brightness 8 Bits control
- Over-Temp. Protection
- Open detection
- Low-EMI mode by PWM frequency
- High performance/cost value
- Qualification is based on AEC-Q102
- Automotive Interior ambient lighting

RGB+HC**LTSA-E27C**2.70 $\times$ 2.70(W) $\times$ 0.85(H) mm

- Ultra Bright InGaN / AlInGaP LED Chips
- Thin (0.85 mm) Chip LED and EIA STD Package
- Preconditioning: Accelerate to JEDEC Level 2a
- 6~16 Bits 3 Channels IC.Embedded
- Global brightness 6 Bits control
- CIE calibration for white color
- Temperature compensation on R/G/B for constant brightness
- Over-Temp. Protection
- Open detection
- Low-EMI mode by PWM frequency
- Qualification is based on AEC-Q102
- Automotive Interior ambient lighting

RGB+HC**LTSA-E351**3.50 $\times$ 3.50(W) $\times$ 1.00(H) mm

- Ultra Bright InGaN / AlInGaP LED Chips
- Thin (1.05 mm) Chip LED and EIA STD Package
- Preconditioning: Accelerate to JEDEC Level 2
- 12 Bits/16 Bits 3 Channels I.C. Embedded
- 7 Bit Programmable Current Adjustment Ratio
- 6 Bit Global Brightness Control
- Over-Temp. Protection
- Open detection
- LOW EMI by PWM frequency
- Qualification is based on AEC-Q102
- Automotive Interior ambient lighting

RGB+HC**LTSA-E35B**5.98 $\times$ 5.40(W) $\times$ 1.30(H) mm

- Ultra Bright InGaN / AlInGaP LED Chips
- Thin (1.35 mm) Chip LED and EIA STD Package
- Preconditioning: Accelerate to JEDEC Level 2
- Serial communication with RS485 compliance.
- Bi directional, half-duplex, 2MBit/s, serial communication
- 8 bit brightness resolution for red, green, and blue LED
- Temperature compensation on red for constant brightness.
- Qualification is based on AEC-Q102.Slim design.
- Automotive Interior ambient lighting


Mini LED**LTSA-0803**5.60 $\times$ 3.20(W) $\times$ 0.15(H) mm

- MiniTOP CSP LED
- Base on AEC-Q102
- View angle 120°
- MSL 2
- 800mcd@10mA for White (DCx CCy 0.31, 0.31)
- 800mcd @ 20mA for Red (Wp 625nm)
- Automotive Exterior solution

Mini LED**LTSA-1010R4U**1.00 $\times$ 1.60(W) $\times$ 0.55(H) mm

- Mini TOP 4red chip in one LED
- Base on AEC-Q102
- View angle 120°
- MSL 2
- Common anode 5 pad design
- 200mcd @ 7mA for each chip
- High resolution solution by 1.2mm pitch
- Automotive Rear lighting

LED Display

SMD Module	LTM-8124M-01 80x42mm	RGB Module LTM-16023F 288x128mm
	• Low power requirement. • Solid state reliability. • 16 x 32 array with X-Y select. • Multicolor displays are applicable to three bright colors. • 1/16 duty Dynamic scan method. • Control method: shift register type. • Test with PWM driven ICs. • Stackable horizontally. • Categorized for Luminous Intensity. • Message sign. • Networking.	• Low power requirement. • Solid state reliability. • 32x64 array with X-Y select. • Multicolor displays are applicable three bright colors. • 1/8 duty dynamic scan method. • Control method: shift register type. • Test with PWM driven ICs. • Stackable horizontally. • Categorized for Luminous Intensity. • Message sign. • Networking.
Dot Matrix	LTP-160FFKF / LTP-76863F (RGB) 40.64x40.64x2.8mm 22x20x8mm	SMD Display LTS-4812CKR-PM 18x8.5x3.75mm
	• 16x16 matrix, 2. • 8x8 matrix, 2. • 1/16 duty dynamic scan method. • Wide viewing angle. • Low power requirement. • Excellent characters appearance. • High brightness & high contrast. • Solid state reliability. • Stackable vertically and horizontally. • Message sign. • Networking.	• 0.39 inch (10.0 mm) digit height. • Continuous uniform segments. • Low power requirement. • Excellent characters appearance. • High brightness & high contrast. • Wide viewing angle. • Solid state reliability. • Categorized for luminous intensity. • Reflow able SMD display. • Lead free package. (according to RoHS) • Instrument. • Industry. • Home appliance.
Reverse SMD Display	LTS-4817CKR-P / LTS-4812CKR-P 16x8.5x2.1 mm 16x8.5x1.8 mm	Through Hole Display LTA-1080ax / LTD-4424ax 25.3x 10.18x1 mm 18x18x2 mm
	• 0.39 inch (10.0 mm) DIGIT HEIGHT. • Continuous uniform segments. • Low power requirement. • Excellent characters appearance. • High brightness & high contrast. • Wide viewing angle. • Solid state reliability. • Categorized for luminous intensity. • Reflow able SMD display. • Lead free package. (according to RoHS) • Instrument & Industry.	• Large, bright, uniform light emitting. • Low power requirements. • High brightness and high contrast. • Categorized for luminous intensity. • Pehchino. • Meter. • Indicator.
Dot Matrix	LTP-14188ax 38x38x10 mm	Backlight Module LTB-Dxxx 96x30x1.5 mm
	• 1.4inch matrix height. • Single plane, wide viewing angle. • Low power requirement. • 6x8 array with X-Y select. • Stackable horizontally. • Solid state reliability. • Signboard. • Transportation.	• Excellent uniformity. • Solid state reliability. • Green product. • Low profile thickness. • High brightness & high contrast. • Customized product. • Esthetic lighting performance. • Backlight module. • Gaming. • Medical.
Sensor Touch Display	LTM-xxxx 204x36x3mm 188x60x2.6mm	
	• Alternative to mechanical buttons and sliders. • Display value added and make circuit at system side simpler. • Works with a variety of overlay materials and thicknesses. • Total thickness can be reduced to less than 3 mm. • Sensor sensitivity can still be kept even with cover plates. • No bending issue even with big size due to free from epoxy material. • Home appl \ Elevator.	

Through Hole Lamp

Single Level SMT CSI



LTL-M11K31H310Q / LTL-M11TB1H310Q
LTL-M11TG1H310Q / LTL-M12YB1H310U
LTL-M12YB1H310U

4.32x 5.09x 8.10mm

- Circuit board indicator.
- Surface mounting.
- Good reliability.
- IR reflow.
- Single color.
- Yellow/ Red / Blue / Pure Green
- Dual color.
- Yellow & yellow green red & yellow green
- Networking.
- Home appliance.

BI-Level SMT CSI



LTL-M24YG0HM20U
LTL-M24M1HM20U

4.24x 11.89x 14.22mm

- Circuit board indicator.
- Surface mounting.
- Good reliability.
- IR reflow.
- Single color.
- Yellow/ Red / Blue / Pure Green
- Dual color.
- Yellow & yellow green red & yellow green
- Networking.
- Home appliance.

Tri-Level SMT CSI



LTL-M36YG0HM30U

4.24x 18.08x 19.84mm

- Circuit board indicator.
- Surface mounting.
- Good reliability.
- IR reflow.
- Single color.
- Yellow/ Red / Blue / Pure Green
- Dual color.
- Yellow & yellow green red & yellow green
- Networking.
- Home appliance.

Quad Level CSI



LTL-42M7NH51

10.7x 4.6x 23.4mm

- Circuit board indicator.
- Lateral light.
- Good reliability.
- Ceramic based single color.
- Dual color.
- Networking.
- Home appliance.

SMT Lamp



LTL-MR4EVX3DA / LTL-MR4YVX3DA
LTL-MR4TBTV3DA / LTL-MR4TCXZ3DA
LTL-MR4TGY13DA / LTL-MR4DZ3KA
LTL-MR4DX3KY

4.2 x 4.2 x 6.8mm

- SMT lamp.
- High brightness.
- Good reliability.
- Good uniformity.
- View angle
- Round 20/30 deg.
- Oval 100/40 deg.
- Yellow: 5500~12000mcd
- Red: 5500~12000mcd
- Blue: 3200~7200mcd
- Green: 12000~27000mcd
- Cyan: 8300~21000mcd
- White: 8800~21000mcd
- PC Amber: 5500~12000mcd
- Outdoor message sign.
- Bus sign.
- Smoke detector

3mm Oval Lamp



LTL-3HNR9DS / LTL-3HNTGV9DS
LTL-3HNTBP9DS

- 3 mm oval lamp.
- High brightness.
- Good reliability.
- Wider view angle 90/48 deg.
- Red / blue/ green color.
- Red: 2200mcd.
- Green: 5750mcd.
- Blue: 1450mcd.
- Outdoor message sign.
- RGB video signboard.

4mm Oval Lamp



LTL-4VMEPADS / LTL-4HMY5AD

- 4 mm oval lamp.
- High brightness.
- Good reliability.
- Various kinds of intensity level solutions.
- Wider view angle 110/50 deg.
- Red/yellow color.
- Red: 1000mcd.
- Yellow: 1000mcd.
- Outdoor message sign.
- Bus sign.

5mm Round Lamp



LTL-2R3EW3K8 / LTL-2R3YV3K8
LTL-2R3TG3K8 / LTL-2R3TBV3K8

- 5 mm round lamp.
- High brightness.
- Good reliability.
- Excellent light pattern for VMS.
- View angle 15/23/30 deg.
- Red: 3800~16000mcd.
- Yellow: 3800~16000mcd.
- Pure Green: 7800~27000mcd.
- Blue: 3500~8200mcd.
- Traffic sign.
- Outdoor message sign.

White Lamp



LTL-17KDU3Z / LTL-488DHEW2D

- 3 mm round lamp.
- 4 mm round/oval lamp.
- 5 mm round/oval lamp.
- 6 mm cylindrical lamp.
- High brightness.
- Good reliability.
- Good uniformity.
- View angle 15/25/45/50 deg.
- Bluish white normal white.
- Home appliance.
- Traffic sign.


RGB 4pin



LTL-780RGBHBJ / LTL-780RGBEJ /
LTL-782RGBTAJW

- 5 mm 4pin RGB lamp.
- High brightness.
- Good reliability.
- LTL-780RGBHBJ, 4 pin pitch 1.27mm.
- LTL-780RGBEJ, 4 pin pitch 2.54mm.
- LTL-782RGBTAJW, 4 pin pitch 2.54mm.
- Networking.
- Keyboard/Mouse.

Optical Sensor / Digital Ambient Light Sensors

Color Sensor 	LTR-381RGB LTR-383RGB* 2.0x2.0x0.7mm 2.0x1.0x0.8mm • Miniature Package. • I2C Interface. • Low Power Consumption. • Color temperature (Red, Green & Blue) respective lux readings. • Wide Dynamic Range including low lux capability • Mobile, Laptop, Tablet, Industrial, Wearable devices, IoT, TV.
UV Sensor 	LTR-390UV 2.0x2.0x0.7mm • Miniature Package. • I2C Interface. • Low Power Consumption. • Ultraviolet light (UVB) sensing • Very low power consumption with sleep mode capability • Wearable devices, IoT.
Digital Ambient Light Sensors 	Mobile LTR-311ALS <i>(High sensitivity ALS)</i> LTR-312ALS* <i>(Ultra sensitive ALS)</i> LTR-311ALS: 2.4x2.0x0.7mm LTR-312ALS*: 2.0x1.0x0.5mm Surveillance LTR-F216A <i>(High IR rejection ALS)</i> LTR-F216A: 2.0x2.0x0.7mm
Digital Ambient Light Sensors 	General LTR-X221A <i>(Built IR rejection ALS)</i> Wearable LTR-X210A* <i>(High sensitive, ultra compact)</i> Laptop LTR-X100A <i>(good IR)</i> General LTR-X100A* LTR-X221A: 2.0x2.0x0.7mm LTR-X210A*: 2.0x1.0x0.35mm LTR-X100A: 2.0x2.0x0.7mm LTR-X100A*: 2.0x2.0x0.7mm
	• Miniature package. • I2C Interface. • Low power consumption. • Close to human eye spectral response. • Wide dynamic range including low lux capability. • Smart home, Wearable devices, IoT, Laptop, Tablet, IP camera, Smart doorbell.
	• Miniature package. • I2C Interface. • Low power consumption. • Close to human eye spectral response. • Wide dynamic range including low lux capability. • Smart home, Wearable devices, IoT, Laptop, Tablet.

Optical Sensor / Digital Proximity

Small window Opening Proximity Sensor 	LTR-X130P <i>(good window)</i> 3.94x2.36x1.36mm • Miniature Package. • I2C Interface. • Low Power Consumption. • Built-in LED driver and detector • High ambient light suppression • Cancellation of crosstalk • Programmable LED driver settings • IoT, Wearable devices, Industrial
Narrow Package Proximity Sensor 	LTR-X140P <i>(compact, narrow package)</i> 2.84x1.44x0.7mm • Miniature Package. • I2C Interface. • Low Power Consumption. • Built-in LED driver and detector • High ambient light suppression • Cancellation of crosstalk • Programmable LED driver settings • IoT, Wearable devices, Industrial
Long Distance Proximity Sensor 	LTR-X150P <i>(Long distance)</i> 4.0x1.5x1.0mm • Miniature Package. • I2C Interface. • Low Power Consumption. • Built-in LED driver and detector • High ambient light suppression • Cancellation of crosstalk • Programmable LED driver settings • IoT, Laptop, Tablet, Industrial, Wearable devices, Home Appliances.
Ultra Small TWS Proximity Sensor 	LTR-2010PS <i>(Ultra small, low power, TWS application)</i> 2.0x1.0x0.35mm • Ultra Compact Package. • I2C Interface. • Ultra low Power Consumption. • Built-in LED driver and detector • High ambient light suppression • Cancellation of crosstalk • Programmable LED driver settings • TWS, Wearable devices.

Gesture + Proximity Sensor

LTR-X910G

4.0x1.5x1.0mm



- Miniature Package.
- I2C Interface.
- Low Power Consumption.
- Gesture and proximity sensing.
- Contactless 4-directional motion detection: Left, right, Far, near.
- Flexible detection distance
- IoT, Laptop, Tablet, Industrial, Wearable devices, Home Appliances.

Optical Sensor / Integrated sensors

Small window Opening 3-in-1

LTR-588ALS* LTR-578ALS (Small Window)

3.8x2.36x1.35mm
3.84x2.36x1.35mm



- Miniature Package.
- I2C Interface.
- Low Power Consumption.
- Close to Human Eye Spectral Response.
- Wide Dynamic Range including low lux capability.
- Built-in LED driver and detector
- High ambient light suppression
- Cancellation of crosstalk
- Programmable LED driver settings
- Mobile, Tablet.

Shield-less 3-in-1

LTR-2562ALS (VCM, Shield-less) 2.84x1.44x0.7mm



- Miniature Package.
- I2C Interface.
- Low Power Consumption.
- Close to Human Eye Spectral Response.
- Wide Dynamic Range including low lux capability.
- Built-in LED driver and detector
- High ambient light suppression
- Cancellation of crosstalk
- Programmable LED driver settings
- Mobile, Tablet.

Thin Window Opening 3-in-1

LTR-588ALS (Thin window opening)

4.0x1.5x1.0mm



- Miniature package.
- I2C Interface.
- Low power consumption.
- Close to human eye spectral response.
- Wide dynamic range including low lux capability.
- Built-in LED driver and detector
- High ambient light suppression
- Cancellation of crosstalk
- Programmable LED driver settings
- Mobile, Tablet.

Big Window Opening 3-in-1

LTR-570ALS* (big window opening) LTR-578RGB* (big window opening, RGB version)

4.2x1.5x1.0mm

4.2x1.5x1.0mm



- Miniature package.
- I2C Interface.
- Low power consumption.
- Close to human eye spectral response.
- Wide dynamic range including low lux capability.
- Built-in LED driver and detector
- High ambient light suppression
- Cancellation of crosstalk
- Programmable LED driver settings
- Mobile, Tablet.

Narrow Package 3-in-1

LTR-2532ALS (Narrow package)

3.26x1.1x0.8mm



- Miniature package.
- I2C Interface.
- Low power consumption.
- Close to human eye spectral response.
- Wide dynamic range including low lux capability.
- Built-in LED driver and detector
- High ambient light suppression
- Cancellation of crosstalk
- Programmable LED driver settings
- Mobile, Tablet.

Under OLED 2-in-1

LTR-535RGB* (Under OLED)

3.34 x 1.34 x 0.4mm



- I2C Interface.
- Low power consumption.
- High ALS sensitivity
- High PS signal to noise ratio
- Wide dynamic range.
- High CCT accuracy
- Close to human eye spectral response
- Mobile, Tablet.

Optical Sensor / Automotive Sensors & Others

Automotive Grade Ambient Light Sensor

LTRA-X222A* (Automotive grade ASOC)

2.0x2.0x0.5mm



- I2C Interface.
- Low power consumption.
- High accuracy in low ambient brightness environment.
- High sensitivity
- Wide dynamic range.
- High gain setting up to 1024 times.
- Close to human eye spectral response
- Automotive.

Red Infrared LED






855nm: LTR-C249 940nm: LTR-C209

2.3x1.85x0.9mm
2.3x1.85x0.9mm



- Miniature package. (Low Profile height of 0.9mm ht)
- High output. (mW/Str)
- No lens required to achieve narrow viewing angle.
- Eliminate cross talk.
- Peak wavelength. (855nm & 940nm)
- Mobile, Laptop, Industrial, Tablet, Remote control, Home appliances.

VCSEL Illuminator / TOF Emitter

TOF Emitter 	60x45 : LTPE-35321AMJ 72x58 : LTPE-35321AOX 90x69 : LTPE-35321ASZ 110x90 : LTPE-35321AWB • 2.2W VCSEL Emitter for Time-of-flight (ToF) • <0.8ns rising and falling time to support higher frequency • 940nm VCSEL, narrow wavelength tolerance, lower noise • 60x45, 64x51, 72x58, 90x69, 110x90 rectangle light pattern to fulfill different applications • Photodiode eye-safety detection	TOF Emitter 	60x45 : LTPE-35321AMJ 72x58 : LTPE-35321AOX 110x90 : LTPE-35321AWB • 4W VCSEL Emitter for Time-of-flight (ToF) • <0.8ns rising and falling time to support higher frequency • 940nm VCSEL, narrow wavelength tolerance, lower noise • 60x45, 72x58, 110x90 rectangle light pattern to fulfill different applications • Photodiode eye-safety detection
VCSEL Flood Illuminator 	60x45 : LTPE-35321AMJ 72x58 : LTPE-35321AOX 90x69 : LTPE-35321ASZ 110x90 : LTPE-35321AWB • 2.2W rectangle light pattern VCSEL Illuminator • 60x45, 64x51, 72x58, 90x69, 110x90 rectangle light pattern to fulfill different applications • Photodiode eye-safety detection	Narrow Angle VCSEL Emitter 	25deg circular : LTPE-35321AFF • 2.3W 25deg circular light pattern VCSEL Illuminator • Long distance Illuminator
Linear VCSEL Emitter 	110x48 : LTP-35321AWJ • 2.2W VCSEL Emitter for Time-of-flight (ToF) • 110x48 rectangle light pattern VCSEL Illuminator • Linear light pattern, high efficiency for targeting area • <0.8ns rising and falling time to support higher frequency • Photodiode eye-safety detection		• Non-Mobile : sweep robot, robot, machine vision, Automated Guided Vehicle (AGV)

1d TOF Sensor


Single Zone 	25deg : LTPE-D6801 4.8x2.8x1mm • An integrated dTOF sensor solution with SPAD technology • Maximum 2 meters measurement distance • Accurate distance measurement, error accuracy <5%
---	---

Infrared Emitter & Receiver

LDAR DIP Series 	940nm LTR-L201E Series 10x25deg TO8 • Driving Current: 40A • Peak Optical Power: 60W	Automotive 	940nm LTR-R361AS Series 50deg: 5.8x3.5x3.0mm 90deg: 5.8x3.8x2.2mm • Max. Junction Temperature: 145°C • Thermal Resistance: typ. 3 K/W • Radiant Intensity: 700-1300 mW/sr • View Angle: 50-150 deg
SMD PD 	LTR-C5048 6.08x4.0x0.86mm • Photo-diode receiver • Peak detection: • Ip=40uA @940nm • Ip=35uA @840nm • Ip=20uA @526nm • (Odometry & HRM)	SMD PD 	LTR-C4437 4.4x3.7x0.55 mm • Photo-diode receiver • Peak detection: • Ip=30uA @940nm • Ip=25uA @525nm • (Odometry & HRM)

SMD PD	LTR-C4825	4.8x2.5x0.48 mm
	• Photo-diode receiver • Peak detection • $I_p=24\mu A(\text{min.}) @940\text{nm}$ • $I_p=17\mu A(\text{min.}) @625\text{nm}$ • (Odometry & HRM)	• Wearable • Industrial application

SMD PD	LTR-C3220/LTR-C3221	3.2x2.0x0.8 mm
	• Photo-diode receiver • Peak detection of C3220: • $I_p=16\mu A @940\text{nm}$ • $I_p=14\mu A @600\text{nm}$ • $I_p=11\mu A @825\text{nm}$ • Peak detection of C3221: • $I_p=22\mu A @940\text{nm}$ • $I_p=17\mu A @600\text{nm}$ • $I_p=13\mu A @625\text{nm}$ • (Odometry & HRM)	• Wearable • Industrial application • Metaverse

SMD PD	LTR-C2018	2.0x1.8x0.6 mm
	• Photo-diode receiver • Peak detection of C2018: • $I_p=6\mu A(\text{min.}) @940\text{nm}$ • $I_p=6.4\mu A(\text{min.}) @600\text{nm}$ • $I_p=4.9\mu A(\text{min.}) @625\text{nm}$ • (Odometry & HRM)	• Wearable • Industrial application

High Power IR	650nm LTE-R38386 Series	60deg 3.8x3.8x3.0mm 90deg 3.8x3.8x2.2mm 120deg 3.8x3.8x2.2mm 150deg 3.8x3.8x1.5mm
	940nm LTE-R38381 Series	
	• High power SMD Infrared Emitter. (1.5~3.4W) • High radiant intensity with low power consumption. • High performance and quality. • 850nm/940nm are available • Various view angle.	• CCTV. • IP cam. • Biometric recognition. • Automotive. • Gesture.

High Power IR	850nm LTE-R28206 Series	80deg 2.7x2.0x1.8mm 120deg 2.7x2.0x0.8mm
	940nm LTE-R28201 Series	
	• High power SMD Infrared Emitter. (1.2~3.4W) • High radiant intensity with low power consumption. • High performance and quality. • 850nm/940nm are available • Various view angle.	• CCTV. • IP cam. • Biometric recognition. • Automotive. • Gesture.

Middle power IR	650nm LTE-R38386M Series	20deg 3.8x3.8x3.0mm 29deg 3.8x3.8x2.76mm 80deg 3.8x3.8x2.45mm 75deg 3.8x3.8x2.3mm 85deg 3.8x3.8x2.2mm 150deg 3.8x3.8x1.51mm
	Special light pattern series LTE-T38386-KGX3 LTE-R38386M-C83	
	940nm LTE-R38381M Series	

High Power IR	850nm LTE-F16168T-ME8 (80D)	80deg 1.6x1.6x1.8 mm
	940nm LTE-F16161S-YE8 (120D)	120deg 1.6x1.6x0.81mm
	• $I_A = +1-800$, • $I_E = 230 \text{ mW/m}^2 @ 1A$ • 850nm/940nm are available • Various view angle.	• CCTV. • IP cam. • Biometric recognition. • Gesture.

	• Middle power SMD Infrared Emitter. (1.2W) • 850nm/940nm are available • 850nm 300~330mW@0.5A • 940nm 250~280mW@0.5A • Various view angle. • Non-symmetric special light pattern design	• CCTV. • IP cam. • Biometric recognition. • Gesture.
--	---	--

Middle power IR	850nm LTE-R30306-KG2 LTE-R30306-MG2	KG2: 3.0x3.0x2.22 mm MG2: 3.0x3.0x1.90 mm
	• Middle power SMD Infrared Emitter. (1.2W) • Total power 300mW • 850nm/940nm are available • Various view angle. • Non-symmetric special light pattern design	• CCTV. • IP cam. • Biometric recognition. • Gesture.

SMD Emitter	LTE-C2826/LTE-C2821	1.0x0.5x0.46mm
	• Wavelength: 650nm / 940nm • 70mA Max • View Angle 150D • Compact size top view emitter	• CCTV. • IP cam. • Industrial application • Metaverse


SMD VCSEL Emitter	LTE-C2821V8	1.0x0.5x0.46mm
	• Wavelength: 940nm • 20mA Max. • Driving current: 16mA • View Angle: 22D • Compact size top view emitter	• Proximity sensor • Aiming application

SMD Emitter	LTE-C195IRG	2.5x1.6x0.55mm
	• Wavelength: 625 / 940 / 850nm • View Angle: 180D • Radiant intensity =2.6mW/mr @625nm@20mA • Radiant intensity =2.0mW/mr @940nm@20mA • Radiant intensity =3.0mW/mr @850nm @20mA	• Wearable • Industrial application

Advanced SMD Emitter 	LTE-C1816IRG 1.65x1.65x0.6mm - Wavelength: 525 / 940 / 880nm - View Angle: 120D - Radiant flux =10mW @525nm@20mA - Radiant flux =9.0mW @940nm@20mA - Radiant flux =9.5mW @880nm @20mA - Wearable - Industrial Application	Advanced SMD Emitter 	LTE-C20081R-Y 2.0x0.6x0.6mm - Wavelength: 880/ 940nm - View Angle: 120D - Radiant intensity =3.3mW/sr @880nm@20mA - Radiant intensity =3.0mW/sr @940nm@20mA - Wearable - Industrial Application
PLCC IR/PTR 	LTE-E6806/LTE-E6801/ LTR-E680 3.5*2.8x1.9mm - Wavelength: 850/940nm - Top view. 100mA Max. - View Angle: 120D - Remote control - Industrial Application - Automotive	PLCC IR/PTR 	LTE-S0386/LTE-S0381/ LTR-S038 4.0x4.0x3.6mm - Wavelength: 850/940nm - Side view 100mA Max. - View Angle: 120D - Remote control - Industrial Application - Automotive
SMD IR/PTR 	Top View Series C191/C171/C272/C930/C218/C228/C211/C950/C990/C155 Side View Series S272/S282/S283/S951/S971/S320/S330 Various SMD package also available from 3.2x2.7x1.1mm to 1.0x0.3x0.55mm		
- SMD type Infrared Emitter, Photo Transistor, and Photodiode. - Compatible with Infrared and vapor phase reflow solder process. - Meet ROHS, Green Product. - Proximity sensor - Remote controller - Touch screen - Reflective sensor control - CCTV - IP cam - Medical - Metaversas - Automotive			
Through Hole IR/PTR 	5mm IR/Blue LTE-3271B / LTE-3271BL / LTE-3371T / LTE-5228A / LTE-4207 / LTE-4208 / LTE-4209 / LTE-4238R / LTE-4834RB / LTE-3677 / LTE-3376 / LTE-2872U / LTE-3370L / LTE-3226 / LTE-3220L / LTE-3280L / LTE-3276 / LTE-32F0L / LTE-7F70L / LTE-7072 3mm IR/Blue LTE-1650 / LTE-4206 / LTE-209 / LTE-4209 / LTE-1803N / LTE-16K3L / LTE-14H / LTE-16H / LTE-18H / LTE-10ABC / LTE-2053 Side look IR LTE-302 / LTE-309 / LTE-306 / LTE-7737L 5mm PTR LTR-323DB / LTR-4833 / LTR-7019D / LTR-3208 3mmPTR LTR-1650D / LTR-4206 / LTR-209 / LTR-200P Side look PTR LTR-301 / LTR-306 / LTR-309 / LTR-3579DP1 / LTR-3888H / LTR-5888DH / LTR-5976D / LTR-516AB / LTR-616AD / LTR-626AD / LTR-636AD / LTR-546AB / LTR-946AD / LTR-733DBM1-TA Various Thru Hole device also available T-1 3/4 (6mm) T-1(3mm) side look		

Photocoupler


High performance Transistor



LTV-8D1 (DIP4)
LTV-3D1 (SOP4)
LTV-2D1 (SSOP4)
LTV-2D4 (SSOP16)
LTV-1Dxx (LSOP4)

- Flat CTR, no decay over IF and temp.
- High working temp 125°C.
- High Viso: 3,750-5,000Vrms.
- BVceo 80V.
- Life doubled from general ones.
- A/C Input available.
- For tough condition and long duration.
- 5G station power.
- power supply.
- feedback circuit.
- Home appliance.
- HVAC.


Automotive Photo Transistor



LTX-813 (DIP4)
LTX-353 (SOP4)
LTX-213 (SSOP4)
LTX-1200 (LSOP4)

- World number 1 AECQ 102 certified.
- Flat CTR, no decay over IF and temp.
- High working temp 125°C.
- High Viso: 3,750-5,000Vrms.
- BVceo 80V.
- Electric vehicle
- On board charger
- Battery management system for EV
- HVAC.
- EV charging station.

Photo Triac




Zero-crossing
MOC308x (DIP6)
MOC308x (DIP6)
LTV-306x (SOP4)
LTV-308x (SOP4)

Random phase
MOC302x (DIP6)
MOC305x (DIP6)
LTV-302x (SOP4)
LTV-305x (SOP4)

- High Viso: 3,750-5,000Vrms
- VDRM: 800V-800V
- Trigger current (IFT): 5-15mA In various product/package, 3mA low trigger available.
- 115°C working temperature.
- AC Motor drivers
- Lighting controls.
- Solid state relays.
- Static Power Switches.
- Temperature controls.
- White goods, home appliance

Solid State Relay




Zero-crossing
LTV-x213 (DIP8)

Random phase
LTV-x2x3 (DIP8)

- IT(RMS) 0.3-1.2A
- High Viso: 5,000Vrms.
- VDRM: 600V.
- Trigger current (IFT): < 10mA.
- No arcing
- AC Motor drivers
- E.M. contactors.
- Solenoid / Valve controls.
- Heater
- White goods, home appliance

Photo Relay




1 form A
LTV-821x (DIP4)
LTV-721x (DIP6)
LTV-17xx (SOP4)

1 form A Automotive
600V LTX-175 (SOP4)
1800V Automotive
LTX-7258 (DIP6-5pin)

2 form A
LTV-822x (DIP8)
1500V Automotive
LTX-258J (LSOP16-12pin)

- Trigger LED current < 3 mA.
- High Viso: 3,750-5,000Vrms
- OFF-state output voltage 1800V/1500V / 800V / 400V / 80V.
- ON-state current 50mA / 300mA / 550mA / 1.8A / 2.0A / 3.0A
- 800V/1500V/1800V with AECQ certification.
- Operating temperature 125°C available.
- Battery Management System for EV
- High-speed circuit monitoring
- High power lighting.
- Smart Meters
- Mechanical relay replacements

IGBT Gate Driver




Rail to Rail Output
LTV-3120 (DIP8)
LTV-152/155E (SOP5)
LTV-0314-5 (SOP8)
LTV-5341/5340/5314 (LSOP5)
LTV-6341/6340/6314 (LSOP6)
LTV-K342/H342 (LSOP8)
LTV-W3120/W3190 (400mil DIP8)
LTV-H313 (15mm LSOP8)

Non Rail to Rail Output
LTV-T350 (DIP8)
LTV-6341N (LSOP6)
LTV-WT350 (400mil DIP8)

- 1-5A maximum peak output current.
- 200-500ns propagation delay.
- High Viso: 3,750-7,500Vrms
- Common mode transient immunity: $\pm 20-35$ kV/ μ s minimum.
- Vcc: 10-30V & 15-30V
- Working temperature -40°C to 125°C.
- 2mm thin-package available in LSOP6.
- 15mm creeper package available.
- Industrial Inverter.
- UPS.
- IGBT/MOSFET gate drive.
- Solar inverter
- Home appliance
- Digital power generator
- Servo engine/motor

Smart IGBT Gate Driver




Auto Reset
LTV-330J/333J (LSOP16)

LED-triggered Reset
LTV-331J/332J (LSOP16)
LTV-316J (LSOP16)

- 2.5-5A maximum peak output current.
- 500ns propagation delay(316).
- 250ns propagation delay(330).
- High Viso: 5,000Vrms.
- Common mode transient immunity: ± 15 kV/ μ s minimum.
- Working temperature -40°C to 125°C.
- Industrial Inverter.
- Solar Inverter
- Home appliance
- Digital power generator
- Servo engine/motor

High Speed (100KBd~1MBd)




100KBd Darlington Output
6N139-L (DIP8)

1MBd Transistor Output
6N136-L (DIP8) / LTV-0501 (SOP8)
LTV-5136 (LSOP5) / LTV-50L (LSOP6)
LTV-2530 (DIP8 2CH) / LTV-053L (SOP8 2CH)
LTV-K54L/H54L (LSOP8 2CH)
LTV-H50L (15mm LSOP8)

- Working temperature -45°C to 125°C
- 10kV/ μ s minimum Common Mode Rejection (CMR) at VCM = 1000V.
- High Viso: 3,750-5,000Vrms.
- 15mm creeper package available.
- Digital logic ground isolation.
- Low input current line receiver.
- EIA-RS-232C line receiver.
- Switching Power Supply.
- High common mode noise line receiver.

High Speed (5MBd~15MBd Logic Gate Output)




8MBd LTV-521 (LSOP5) / LTV-K24L (LSOP8 2CH)

10MBd 6N137 (DIP8) / LTV-M001 (SOP8) LTV-68L (LSOP8) / LTV-2630 (DIP8 2CH) LTV-W137 (400mil DIP8) LTV-083L (SOP8 2CH)

15MBd LTV-K63L/H63L (LSOP8)

- tPLH 80ns max.
- High V_{iso} 3,750-5,000Vrms.
- 10kV/μs CMR minimum.
- Smart meter data collector
- Server power
- Programmable logic controller
- MCU isolation
- Communication

High Speed (10MBd~15MBd Totem pole output)




10MBd LTV-M01L (SOP5) / LTV-81L (LSOP8) LTV-864L (SOP8 2CH) LTV-K64L / H64L (LSOP8 2CH) LTV-H61L (15mm LSOP8)

15MBd LTV-681 (LSOP8)

- tPLH 80ns max.
- High V_{iso} 3,750-7,500Vrms.
- 20kV/μs CMR minimum.
- Working temperature -40°C to 105°C, 125°C available.
- 2mm thin-package available in LSOP8.
- 15mm creepage package available.
- Smart meter data collector
- Server power
- Programmable logic controller
- MCU isolation
- Communication


Behnkt Trigger



H11L1 (DIP6) LTV-M408 (SOP5)

- tPLH 1μs max.
- High V_{iso} 3,750-5,000Vrms.
- 10kV/μs CMR minimum.
- Working temperature -40°C to 100°C.
- Smart meter data collector
- Server power
- Programmable logic controller
- MCU isolation
- Communication
- Home Appliance


IPM Driver (Open Collector Output)



Open Collector LTV-4508 (DIP8) / LTV-M458 (SOP5) LTV-0486-S (SOP8) / LTV-8486 (LSOP8) LTV-458 (LSOP8) LTV-W4508 (400mil DIP8)

- V_{cc} from 4.5-30V.
- tPLH 0.55 μs max.
- Working temperature -45°C to 100°C.
- Minimized Pulse Width Distortion (PWD) 450ns.
- 16kV/μs CMR minimum.
- 2mm thin-package available in LSOP8.
- IPM Interface Isolation.
- Isolated IGBT/MOS FET Gate Drivers.
- AC and Brushless DC Motor Driver.
- Industrial Inverters.
- General Digital Isolation.

IPM Driver (Totem Pole Output)




Buffer LTV-M480/LTV-M484 (SOP5) LTV-5480/LTV-5484 (LSOP5) LTV-480 (LSOP8)

Inverter LTV-M481 (SOP5) LTV-5481 (LSOP5) LTV-481 (LSOP8)

- V_{cc} from 4.5-30V.
- tPLH 0.25 μs max.
- Working temperature -40°C to 100°C.
- 250ns.
- Minimized Pulse Width Distortion (PWD) = 120ns.
- 20kV/μs CMR minimum.
- 2mm thin-package, 3.5mA low trigger available.
- IPM Interface Isolation.
- Isolated IGBT/MOS FET Gate Drivers.
- AC and Brushless DC Motor Driver.
- Industrial Inverters.
- General Digital Isolation.


Isolation Amplifier (Analog)



LTV-7840 (DIP8) LTV-C780 (LSOP8) LTV-C870 (LSOP8) LTV-C7840 (LSOP8)

- Gain error at 25°C ±0.5%/±1%/±3%/±5%
- V_{IN} from -200mV to 200mV
- V_{DD} 5.5V max.
- 100 kHz Bandwidth
- 15 kV/μs CMR minimum
- Isolation voltage 5000V
- Operation temperature -40°C to 105°C.
- Current/ Voltage sensing in AC and servo motor drives
- PV Inverters, wind turbine Inverters
- current/ voltage sensing
- Industrial process control
- Switching power supply current/ Voltage signal isolation
- Battery management system


Isolation Amplifier (Digital)



LTV-7660/7660 (DIP8) LTV-C797 (LSOP8)

- 10MHz Internal clock
- Gain error at 25°C ±1%/±5%
- V_{IN} from -200mV to 200mV
- V_{DD} 5.5V max.
- Resolution 8/12/16 bits
- 25 kV/μs CMR minimum
- Isolation voltage 5000V
- Operation temperature -40°C to 105°C.
- Current/ Voltage sensing in AC and servo motor drives
- PV Inverters, wind turbine Inverters
- current/ voltage sensing
- Industrial process control
- Switching power supply current/ Voltage signal isolation
- Battery management system

High-Intensity Analog



LTV-W200/W201 (400mil DIP8)

- Transfer gain K₃ ±5%~±40%
- Operation temperature -55°C to 155°C.
- Power supply feedback current/ voltage
- Medical sensor isolation
- Audio signal interface
- Isolated process control transducers
- Telecom
- Low cost analog isolation

Worldwide Contacts

HEADQUARTERS

LITEON Technology Corp.

21F, No.566, Shyuan Road, Xinzhuang Dist.,
New Taipei City 23585, Taiwan, R.O.C
Tel: +886-2-2222-8181
Fax: +886-2-2221-1848
<http://www.liteon.com/tw>

FACTORY

LITEON Electronics (Tian Jin) Co., LTD

No.11 Fu Yuan Road, Wujing Development
Area,
Tianjin 301700 China
Tel: +86-22-8219-3000
Fax: +86-22-8212-2406

LITEON Technology (Chang Zhou) Co., LTD

No.88, Yanghu Road, Wujin
Hi-Tech Industrial Development
Zone, Jiangsu, 213108 China
Tel: +86-519-8308-8888
Fax: +86-519-8308-8889

LITEON Electronics (Thailand) Co., LTD

88/4 Moo 1, Rangsit Ongkarak Road,
Buriyaburi Tanyaburi Pathumthani 12130
Bangkok
Thailand
Tel: +662-5331-203-18
Fax: +662-5331-747

SALES OFFICE / America

Milpitas, California LITEON, INC.

720 S. Hillview Drive Milpitas,
CA 95035
Tel: +1-408-946-4873
Fax: +1-408-941-4867

Austin, Texas LITEON, INC.

1828 Kramer Lane Building A, Suite D
Austin, TX 78768
Tel: +1-512-836-6062
Fax: +1-512-836-4942

Chicago, Wisconsin LITEON, INC.

Tel: +1-262-862-9451
Fax: +1-262-862-9480

Asia / Pacific

LITEON Electronics (Tian Jin) Co., LTD

No.11 Fu Yuan Road, Wujing Develop-
ment Area, Tianjin 301700 China
Tel: +86-22-8219-3000
Fax: +86-22-8212-2405

LITEON Technology (Chang Zhou) Co., LTD

No. 88, Yanghu Road, Wujin Hi-Tech
Industrial Development Zone, Jiangsu,
213108 China
Tel: +86-519-8308-8888
Fax: +86-519-8308-8889

LITEON Technology (Dongguan) Co., LTD

No.1, Zheng An Road, Sheng Jiao
Section Cheng An Town, Dongguan City,
Guangdong,
623878 China
Tel: +86-519-8306-8888
Fax: +86-519-8306-8888

LITEON Electronics H.K. LTD.

RM904-005, 9/F., International Plaza, 20
Shaung Yuet Road, Kowloon Bay,
Kowloon 523878 H.K.
Tel: +852-2798-3012~4
Fax: +852-2798-0044

LITEON JAPAN LTD

8F, No.2 Dlx Bldg., 2-16-2 Shibakanda,
Chiyoda-Ku, Tokyo 101-0021 Japan
Tel: +813-9258-8502
Fax: +81-3-3258-8505

LITEON Singapore Pte LTD

22, Sin Ming Lane, #03-83 Midview City
Singapore 573869
Tel: +65-6349-0816
Fax: +65-6349-0810

Europe

LITEON Electronics (Europe) LTD

23 Apex Business Village Cramlington
Northumberland NE23 7BF, UK
Tel: +44-181-280-4831
Fax: +44-181-250-4798

LITEON Technology (Europe)

B.V. Havelstrasse 7, 24639 Neumuenster,
Germany
Tel: +49-4321-55555-0
Fax: +49-4321-55555-2



Empowering A Green Future



Visit us

For more product information and sales inquiries:

- <https://www.liteon.com/ops>
- +886-2-2222-6181
- +886-2-2221-1948
- OPS-opswebmaster@liteon.com
- 21F, No.555, Shyuan Road, Xinzhuang Dist.,
New Taipei City 23585, Taiwan, R.O.C