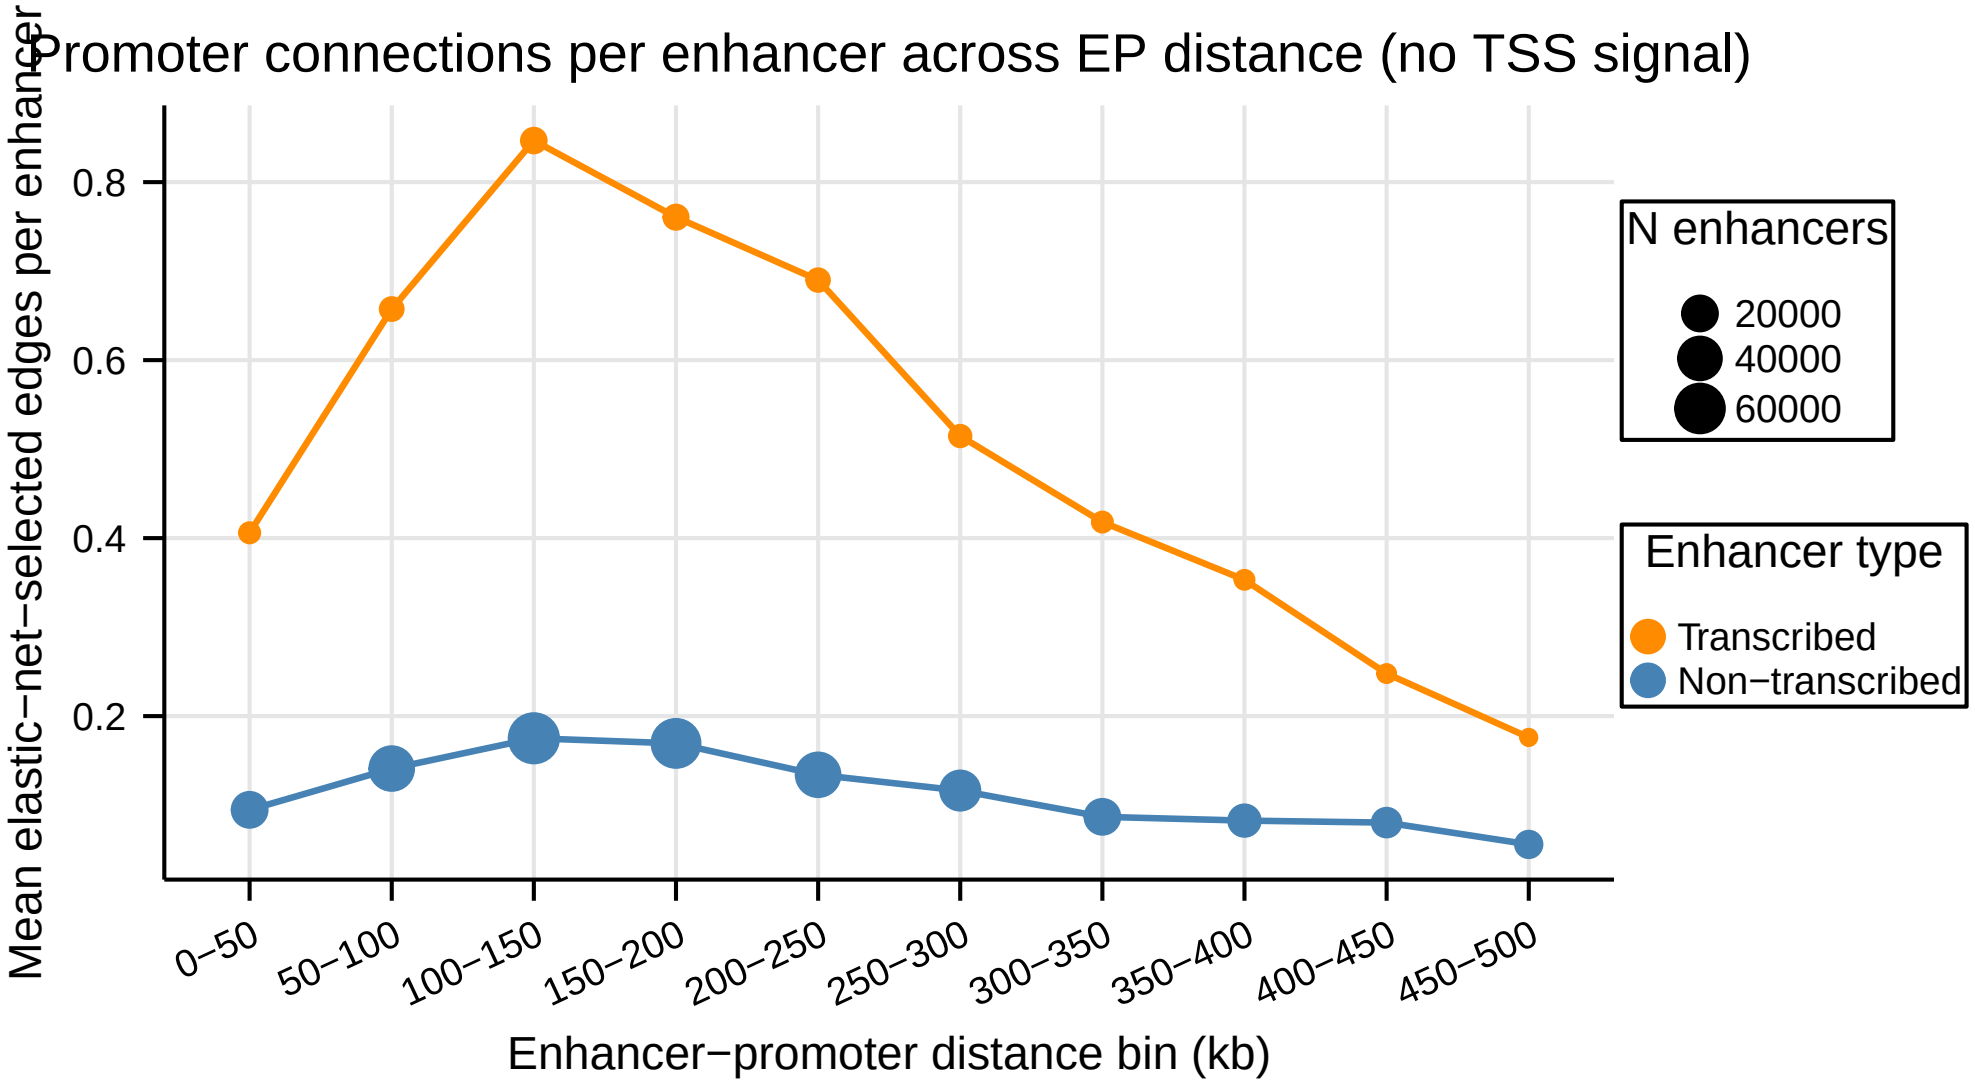
Promoter connections per enhancer across EP distance (no TSS signal)
Mean elastic−net−selected edges per enhancer
0.8
0.6
0.4
0.2
0−50
50−100
100−150
150−200
200−250
250−300
300−350
350−400
400−450
450−500
Enhancer−promoter distance bin (kb)
N enhancers
20000
40000
60000
Enhancer type
Transcribed
Non−transcribed