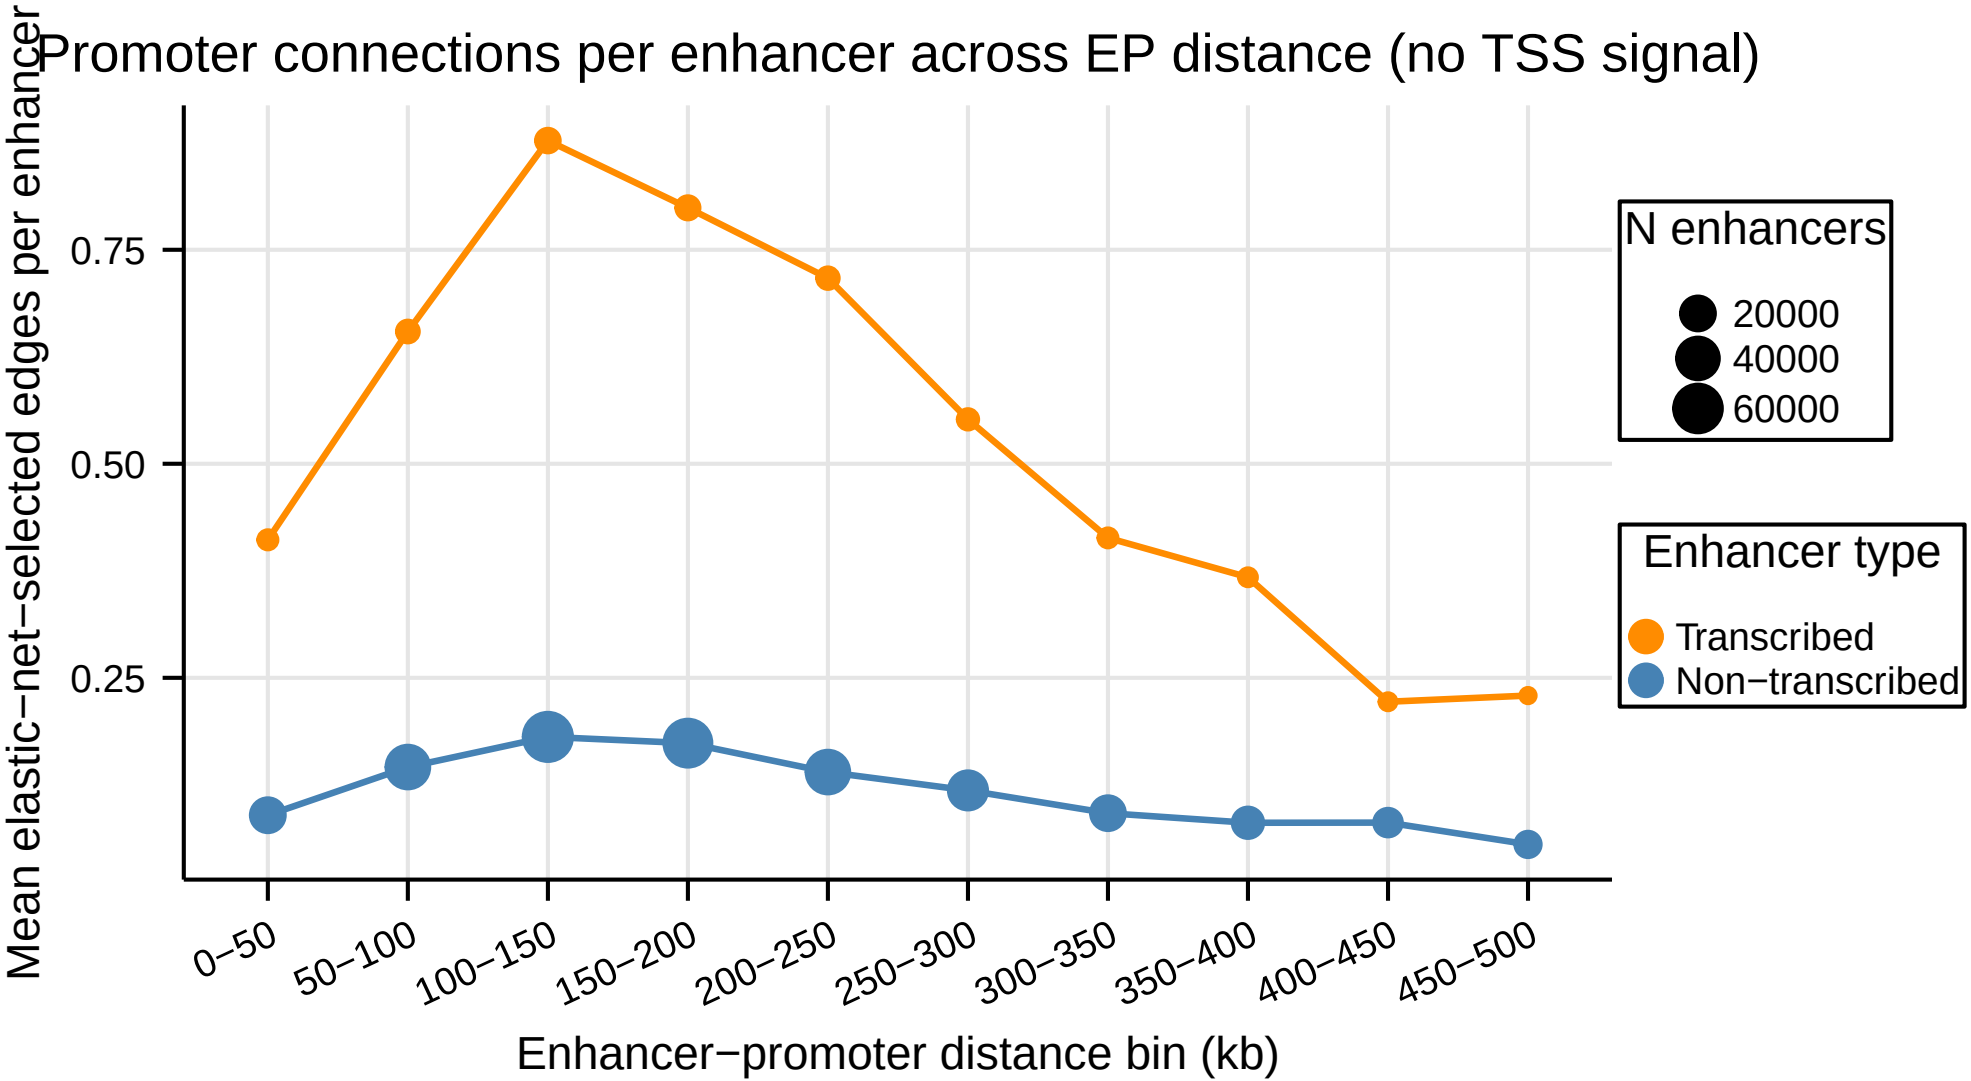
Promoter connections per enhancer across EP distance (no TSS signal)
Mean elastic−net−selected edges per enhancer
0.75
0.50
0.25
0–50
50–100
100–150
150–200
200–250
250–300
300–350
350–400
400–450
450–500
Enhancer−promoter distance bin (kb)
N enhancers
20000
40000
60000
Enhancer type
Transcribed
Non−transcribed