
Scopus Search Sources Alerts Lists Help SciVal A Register Login

Author details

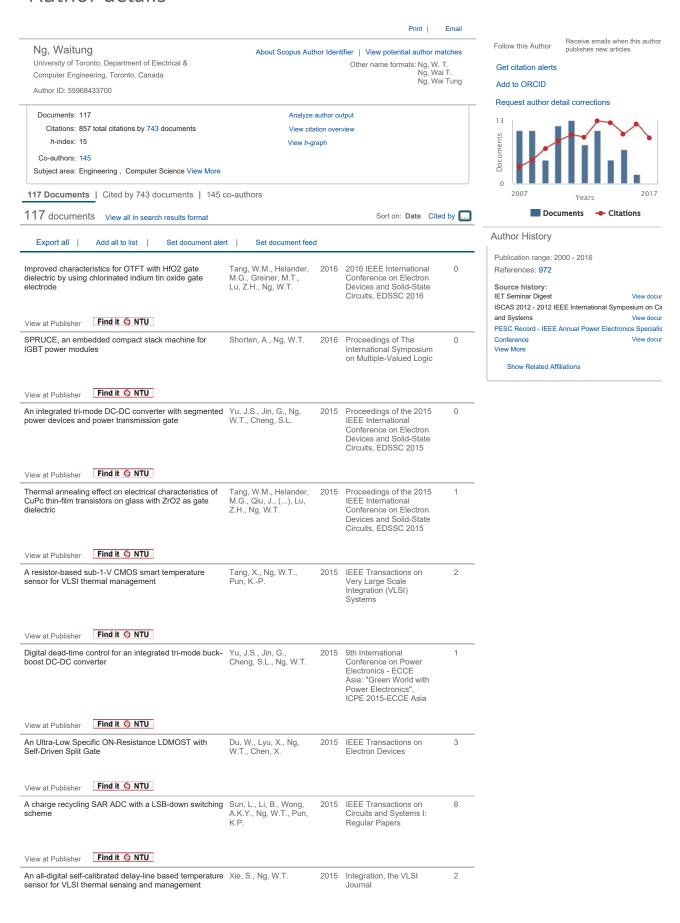

| Digital integrated temperature sensors for VLSI thermal management | Xie, S., Ng, W.T. | 2014 | Proceedings - 2014 IEEE 12th International Conference on Solid- State and Integrated Circuit Technology, ICSICT 2014 | 1 |
|---|---|------|---|----|
| View at Publisher Find it 6 NTU | | | | |
| Digital controlled dead-time for tri-mode buck-boost DC-DC converters | Cheng, S., Yao, S., Jin, G., Ng, W.T. | 2014 | Proceedings - 2014 IEEE 12th International Conference on Solid- State and Integrated Circuit Technology, ICSICT 2014 | 2 |
| View at Publisher Find it 6 NTU | | | | |
| Delay-line temperature sensors and VLSI thermal management demonstrated on a 60nm FPGA | Xie, S., Ng, W.T. | 2014 | Proceedings - IEEE International Symposium on Circuits and Systems | 4 |
| View at Publisher Find it 6 NTU | | | | |
| An integrated tri-mode non-inverting buck-boost DC-DC converter with segmented power devices and power ransmission gate structure | Jin, G., Ng, W.T. | 2014 | Proceedings of the International Symposium on Power Semiconductor Devices and ICs | 3 |
| View at Publisher Find it 🥱 NTU | | | | |
| A segmented output stage H-bridge IC with tunable gate driver | Yu, J.S., Zhang, W.J., Ng, W.T. | 2014 | Proceedings of the International Symposium on Power Semiconductor Devices and ICs | 2 |
| View at Publisher Find it 6 NTU | | | | |
| A feedback-voltage-sensing translator for floating buck DC-DC converters | Ning, Z., He, L., Hu, Z., Jin, G., Ng, W.T. | 2013 | 2013 IEEE International Conference of Electron Devices and Solid-State Circuits, EDSSC 2013 | 0 |
| View at Publisher Find it 6 NTU | | | | |
| A study on the electrical characteristics of copper obthalocyanine-based OTFTs with ZrTaO as gate dielectric | Tang, W.M., Helander, M.G., Greiner, M.T., (), Lu, Z.H., Ng, W.T. | 2013 | 2013 IEEE International Conference of Electron Devices and Solid-State Circuits, EDSSC 2013 | 0 |
| View at Publisher Find it 6 NTU | | | | |
| A 0.9V 5kS/s resistor-based time-domain temperature sensor in 90nm CMOS with calibrated inaccuracy of -0.6° C/0.8°C from -40°C to 125°C | Tang, X., Pun, KP., Ng, WT. | 2013 | Proceedings of the 2013 IEEE Asian Solid-State Circuits Conference, A-SSCC 2013 | 5 |
| View at Publisher Find it 6 NTU | | | | |
| A power and area efficient 65 nm CMOS delay-line ADC for on-chip voltage sensing | Shen, S.A., Xie, S., Ng, W.T. | 2013 | Journal of Circuits, Systems and Computers | 3 |
| View at Publisher Find it 6 NTU | | | | |
| A low power all-digital self-calibrated temperature sensor using 65nm FPGAs | Xie, S., Ng, W.T. | 2013 | Proceedings - IEEE International Symposium on Circuits and Systems | 10 |
| View at Publisher Find it 6 NTU | | | | |
| Oynamic gate resistance control for current balancing in parallel connected IGBTs | Sasaki, M., Nishio, H., Ng, W.T. | 2013 | Conference Proceedings - IEEE Applied Power Electronics Conference and Exposition - APEC | 13 |
| View at Publisher Find it 5 NTU | | | | |

Top of page

The data displayed above is compiled exclusively from articles published in the Scopus database. To request corrections to any inaccuracies or provide any further feedback, please contact us (registration required). The data displayed above is subject to the privacy conditions contained in the privacy policy.

What is Scopus 日本語に切り替える Help
Content coverage 切換到简体中文 Contact us
Scopus blog 切換到繁體中文
Scopus API Русский язык
Privacy matters

ELSEVIER

Terms and conditions Privacy policy

Copyright © 2017 Elsevier B.V. All rights reserved. Scopus® is a registered trademark of Elsevier B.V. Cookies are set by this site. To decline them or learn more, visit our Cookies page.

RELX Grou