ARDUINO WIRING SCHEMATIC

Functional pin-level wiring • not a physical breadboard layout • each node has its own USB power

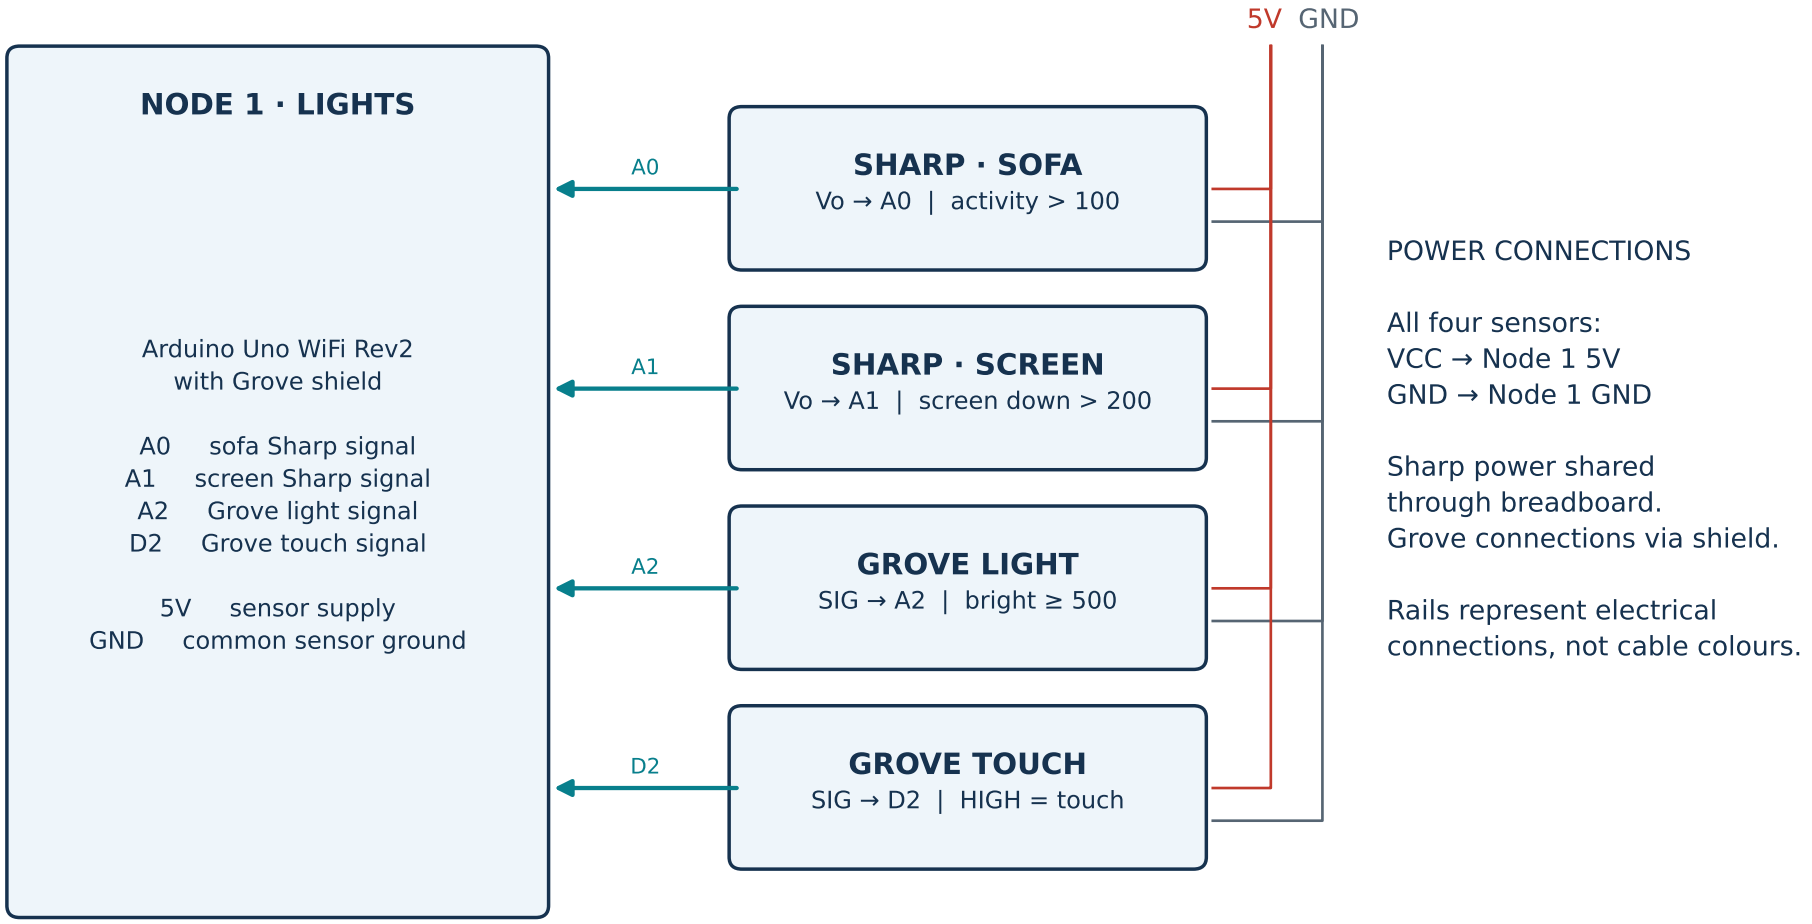
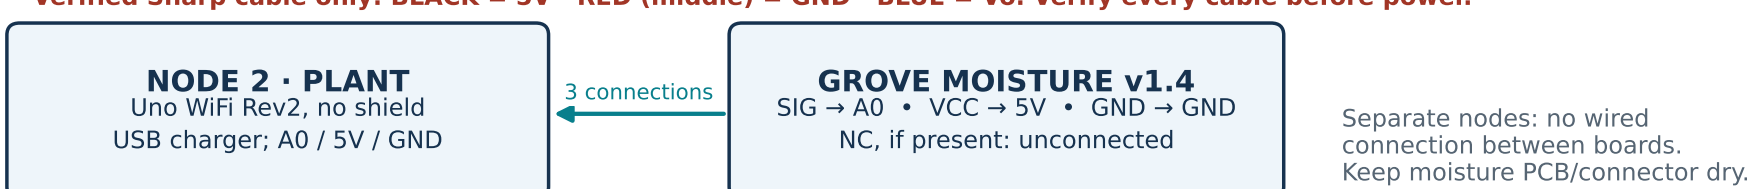
Verified Sharp cable only: BLACK = 5V · RED (middle) = GND · BLUE = Vo. Verify every cable before power.