


Created a LAN topology in Cisco Packet Tracer using 2 switches with PCs and laptops connected as end devices. Assigned IP addresses to all devices and verified successful communication by sending packets using Simple PDU:

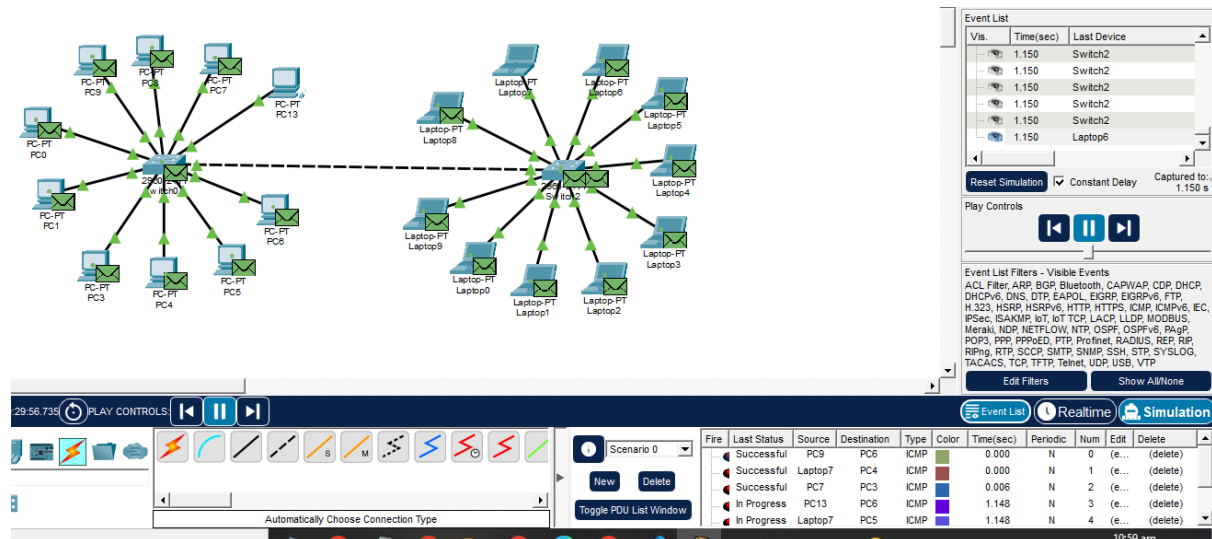

A LAN topology was created using two switches connected to multiple PCs and laptops. Each end device was assigned a unique IPv4 address within the same network. After completing the addressing configuration, connectivity was verified by sending Simple PDUs between devices. The successful packet transmission confirmed that all devices were correctly configured and could communicate over the local network.

Laptop1

```

Physical  Config  Desktop  Programming  Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=12ms TTL=128
Reply from 192.168.1.2: bytes=32 time<1ms TTL=128


Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 3ms

C:\>|

```

Successful ping test from laptop 1 to PC 2

PC13

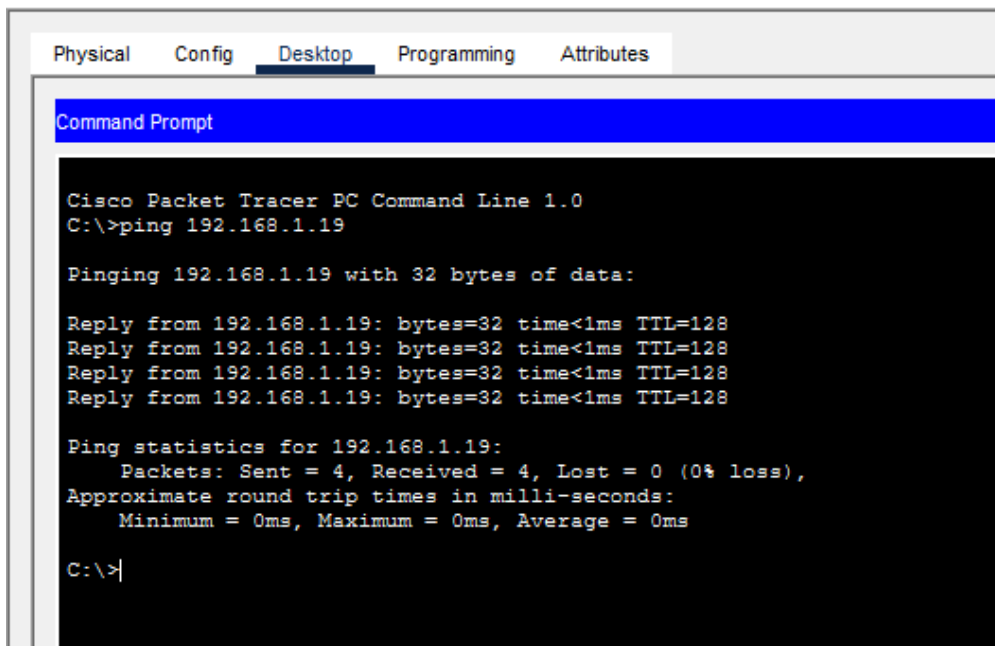

The screenshot shows the 'Desktop' tab of a PC configuration window in Cisco Packet Tracer. A 'Command Prompt' window is open, displaying the results of a ping command. The text in the command prompt is as follows:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.19

Pinging 192.168.1.19 with 32 bytes of data:

Reply from 192.168.1.19: bytes=32 time<1ms TTL=128
Reply from 192.168.1.19: bytes=32 time<1ms TTL=128
Reply from 192.168.1.19: bytes=32 time<1ms TTL=128
Reply from 192.168.1.19: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.19:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>|
```

Successful ping test from PC13 to laptop 8