




CREO PARAMETRIC 7.0

INTRODUCTION

BY CHRISTOPHER F. SIKORA

COMPUTER AIDED DESIGN

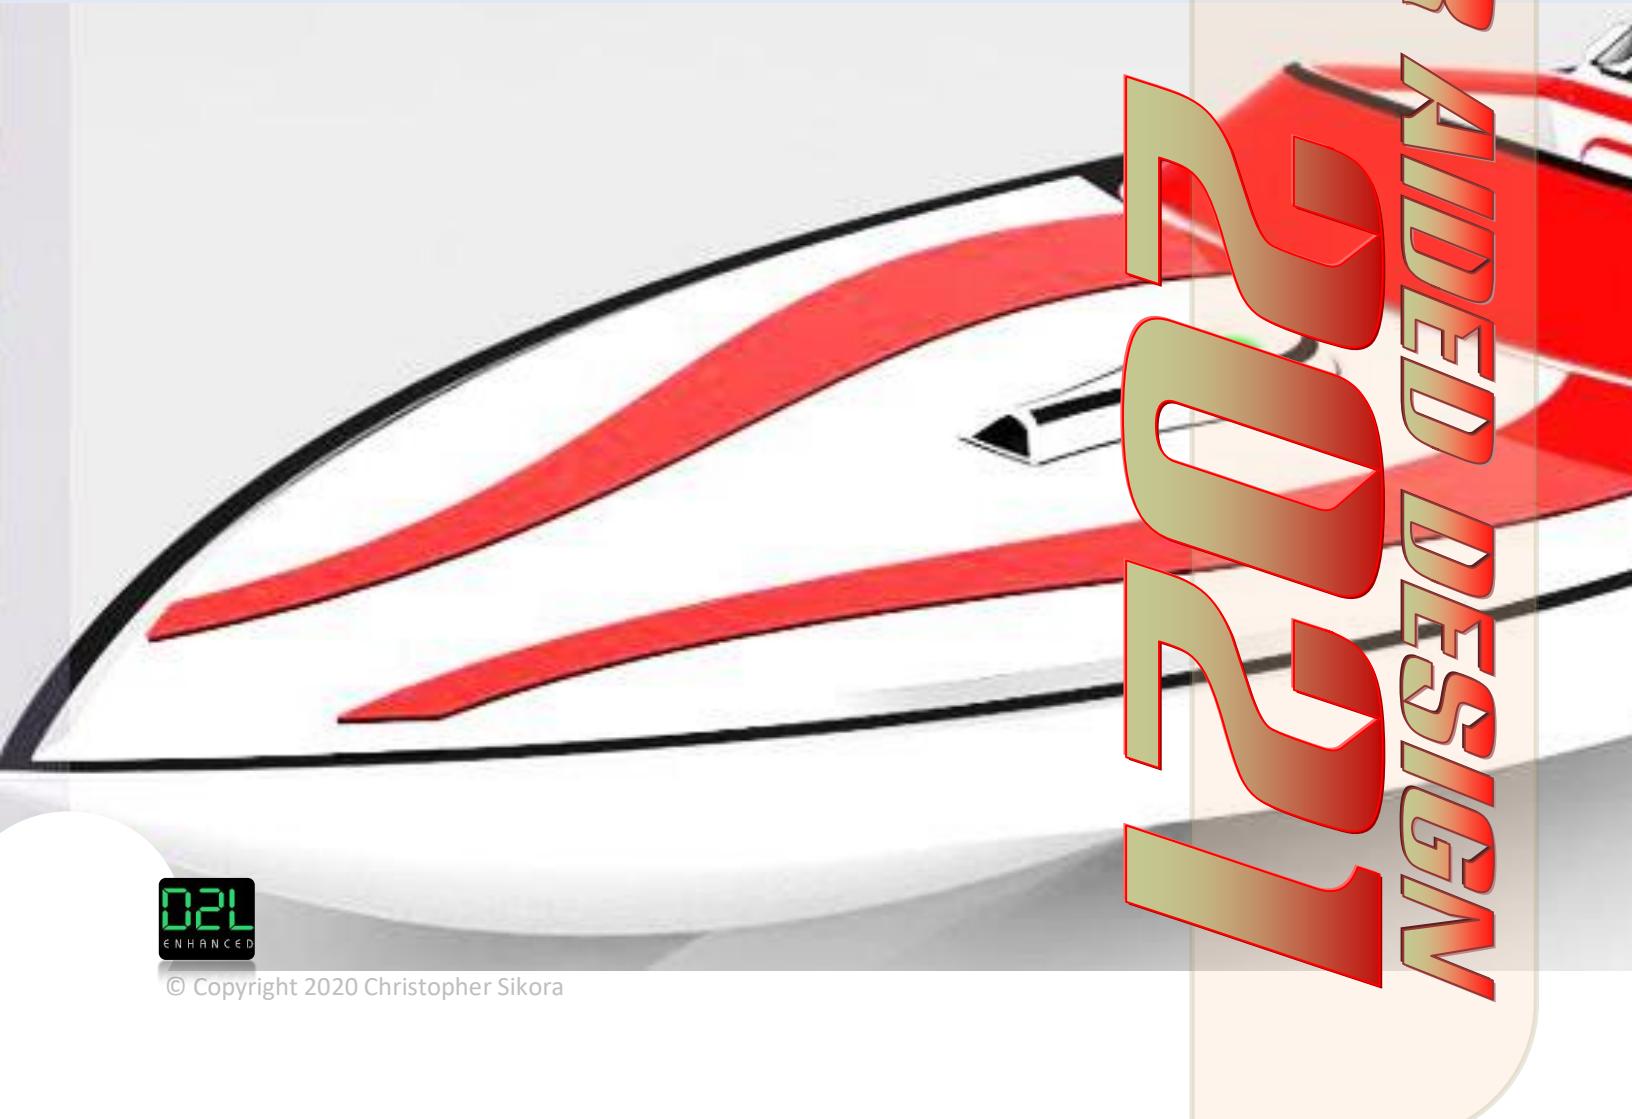

© Copyright 2020 Christopher Sikora

This manual is for educational purposes only. It may be printed, but not resold for profit for its content.

Creo Parametric 7.0® is a registered trademark of PTC Corporation.

Creo Parametric 7.0® is a product name of PTC Corporation.

ACIS® is a registered trademark of Spatial Technology Inc.

IGES™ Access Library is a trademark of IGES Data Analysis, Inc.

Other brand or product names are trademarks or registered trademarks of their respective holders.

The information discussed in this document is subject to change without notice and should not be considered commitments by Christopher F. Sikora.

The software discussed in this document is furnished under a license and may be used or copied only in accordance with the terms of the manufacturer license.

Pro/ENGINEER (Creo Parametric 7.0) Basics 105

Course Description:

Pro/ENGINEER (Creo) Basics

3 credit hours

Exploration of the theory and application of solid modeling techniques for product design and manufacturing. Prerequisite: Intro to Engineering Drawings 101 or consent of instructor.

Course Objectives:

Provide the student with the knowledge and practical experience in the areas of 3D CAD modeling of parts, assemblies, and the creation of mechanical drawings from the models.

Textbook

Creo Basics free/pdf., parts, and videos provided on www.vertanuxl.com

Evaluation Scale:

A	90% to 100%
B	80% to 89%
C	70% to 79%
D	60% to 69%
F	Below 60%



Points:

Exercises	300 pts
Mid Term	300 pts
Final	300 pts
Labs	100 pts
Total	1000 pts

General Course Outline

Date	Week	Topic
-------------	-------------	--------------

- I.** *Introduction to the Interface Lecture
Modeling Theory - Sketching and Base Feature Geometry
Creation. Lab*
- 2.** *Revolved Features and Mirroring*
- 3.** *Part Modeling
Secondary Features. Fillets, Chamfers, Draft, Patterns,
Mirroring.*
- 4.** *Sweeps, and Circular Patterns*
- 5.** *Modeling Quiz and CAD Administration*
- 6.** *Building Assemblies (Bottom-Up method "BU")*
- 7.** *Creating Drawings. Review for Mid Term*
- 8.** *Mid Term Exam*
- 9.** *3D Curves and Sweeps*
- 10.** *Swept Blends/Lofting*
- II.** *Assemblies Creation (Top-Down Method "TD")*
- 12.** *Assembly/Part Editing ("TD" & "BU" Methods)*
- 13.** *Sheet Metal Intro*
- 14.** *Assembly Project (continued)*
- 15.** *Lab time to complete exercise, Review for Final Exam*
- 16.** *Final Exam*

Required Hardware

16+ Gigabyte USB Flash / Thumb Drive

Required Software (Click on link below)

[**CREO Parametric 6.0 or 7.0 Student Edition**](#)

STUDENTS WITH DISABILITIES

We welcome students with disabilities and are committed to supporting them as they attend college. If a student has a disability (visual, aural, speech, emotional/psychiatric, orthopedic, health, or learning), s/he may be entitled to some accommodation, service, or support. While the College will not compromise or waive essential skill requirements in any course or degree, students with disabilities may be supported with accommodations to help meet these requirements.

The laws in effect at college level state that a person does not have to reveal a disability, but if support is needed, documentation of the disability must be provided. If none is provided, the college does not have to make any exceptions to standard procedures.

All students are expected to comply with the Student Code of Conduct and all other college procedures as stated in the current College Catalog.

PROCEDURE FOR REQUESTING ACCOMMODATIONS:

1. Go to SRC108 and sign release to have documentation sent to the college, or bring in documentation.
2. Attend an appointment that will be arranged for you with the ADA coordinator or designee.

CLASSROOM PROCEDURES:

1. Attendance of each scheduled class meeting is required unless otherwise specified by the instructor.
2. Daily work problems and hand-outs will be maintained in a notebook and turned in upon the instructor's request.
3. Reading assignments will be made prior to discussing the material.
4. Keep your drafting workstation clean and free of miscellaneous materials.
5. Please report any malfunctioning equipment to the instructor.

LABORATORY UTILIZATION:

1. Regular daytime hours. The room is open for your use starting at 8:00AM daily. Even though classes are being held, you are encouraged to find an open area and work in the laboratory.
2. There are evening classes, but you may use the lab up to 10:00PM.
3. On weekends, the lab will be available on Saturdays from 9:00AM to 4:00PM. The lab will be closed on Sundays.

INSTRUCTOR'S RESPONSIBILITY:

1. Present material in a manner that can be understood by each student.

2. Respect each student as an individual, to be of assistance in any way possible, and to help solve problems, but not to solve problems for the student.

3. Keep records of your progress and to summarize your learning experiences with a final

Attendance and Cheating Policies

Introduction: Drafting is a technical profession in our society; consequently, presentations in this course are factual and technical, and final grades represent the student's accomplishment of the learning activities.

Attendance: Attendance at each class meeting is required. Attendance may be a factor when determining the final grade. Your instructor will specify his/her policy concerning the relationship of attendance and the final grade.


Each instructor has the option of taking attendance for his/her personal use. If a student misses class because of illness, a field trip, or any other AUTHORIZED reason, the student is obligated to determine what was missed, and will be held responsible for that work. If a student is absent without an excused absence, he/she will also be held responsible, and must obtain all information from some source other than the class instructor. Instructors DO NOT have to accept any make-up work, do individual tutoring, or make special test arrangements for any UNEXCUSED ABSENCE.

Cheating: Cheating in this department is interpreted to mean the copying, tracing, or use of another person's work for the purpose of completing an assignment.

Individual initiative and personal performance in completing all assignments is required of all students. This course may seem to offer situations that are conducive to cheating. However, evidence of cheating on the part of any student will be sufficient cause for an assignment of an "F" for the course.

Instructors reserve the right to change a grade after the end of the semester if there is evidence to warrants.

CAD I05 EXERCISE VIDEOS INDEX

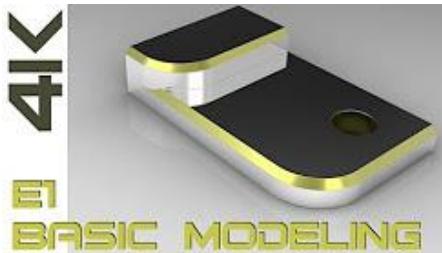

Creo Parametric 7.0 Basics Tutorials

- vertanuxl
- 14 videos



E1 Creo Parametric 7.0 - Basic Modeling 1 Tutorial 4K
by vertanuxl

36:52



E2 Creo Parametric 7.0 - Basic Modeling 2 Tutorial
by vertanuxl

27:23



E3 Creo Parametric 7.0 - Basic Modeling 3 Tutorial
by vertanuxl

46:59



E4 Creo Parametric 7.0 - Basic Modeling 4 Tutorial
by vertanuxl

47:21



E5 Creo Parametric 7.0 - Assembly Basics 1 Tutorial
by vertanuxl

18:28



E6 Creo Parametric 7.0 - Detailing Basics Tutorial
by vertanuxl

28:36



E7 Creo Parametric 7.0 Advanced Modeling I
by vertanuxl

22:59



E8 Creo Parametric 7.0 Advanced Modeling 2
by vertanuxl

21:00



E9 Creo Parametric 7.0 - Basic Assemblies 2
by vertanuxl

35:37



E10 Creo Parametric 7.0 - Assemblies 3 Tutorial
by vertanuxl

32:46



E11 Creo Parametric 7.0 Sheet Metal 1 Tutorial
by vertanuxl

24:31



Creo Parametric 7.0 Accelerated Learning Tutorial & MID-TERM REVIEW
by vertanuxl

20:45



Creo Parametric 7.0 Basics Final Exam Review
by vertanuxl

27:22



EO How to make a CAD portfolio using Creo and MS Word
by vertanuxl

CAD I05 TOTALS (E - Exercise, L-Lab, Q-Quiz)

- **E1 - 10pts**
 - **L1 - 5pts**
 - **L1b - 10pts**
- **E2 - 30pts**
 - **L2 - 5pts**
 - **Q1 - 10pts**
- **E3 - 30pts**
 - **L3 - 5pts**
 - **L3b - 5pts**
- **E4 - 30pts**
 - **L3c - 5pts**
- **E5 - 30pts**
 - **L5b - 10pts**
- **E6 - 30pts**
 - **L6 - 10pts**
- **E7 - 30pts**
 - **L3d - 5pts**
- **E8 - 30pts**
 - **L8 - 5pts**
- **E9 - 30pts**
 - **L9 - 5pts**
- **E10 - 30pts**
 - **L11c - 5pts**
- **E11 - 30pts**
 - **L11d - 5pts**


MIDTERM - 300pts

FINAL - 300pts

TOTAL - 1000pts

Introduction to Pro/E - Creo

CREO Parametric 7.0 Interface

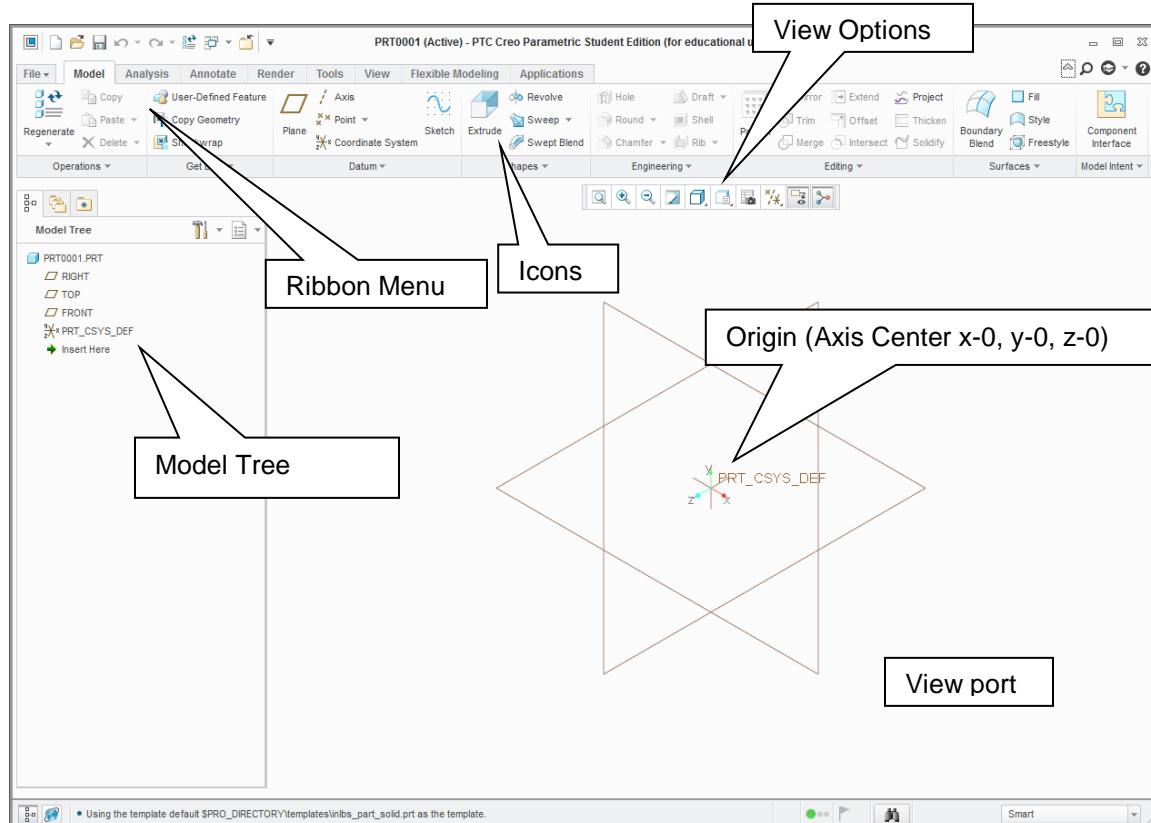

Mouse Buttons

Left Button - Most commonly used for selecting objects on the screen or sketching.


Right Button – Used for activating pop-up menu items, typically used when editing.
(Note: you must hold the down button for 2 seconds)

Center Button – (option) Used for model rotation, dimensioning, zoom when holding Ctrl key, and pan when holding Shift key. It also cancels commands and line chains.


Center Scroll Wheel – (option) same as Center Button when depressed, only it activates Zoom feature when scrolling wheel.

“Options & Properties” menus “*The heart of Creo*”


Selecting the “File” – “Options” pull down menu (*located at the top left side of the screen*) opens the active documents Options.

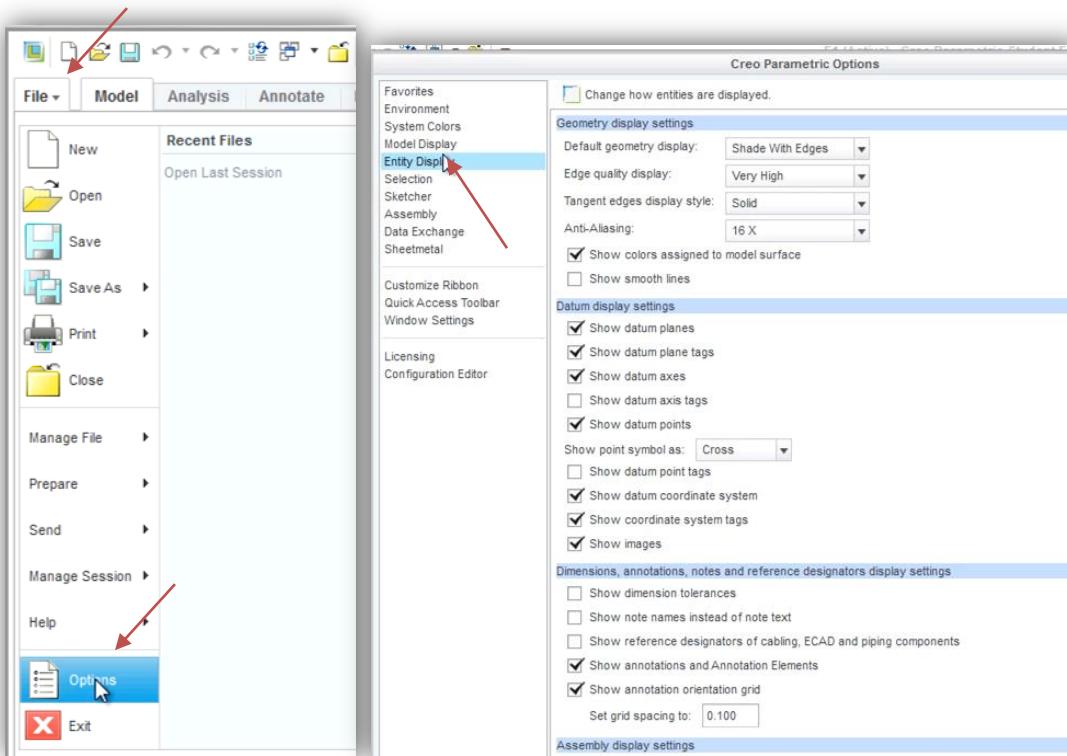


Model Properties

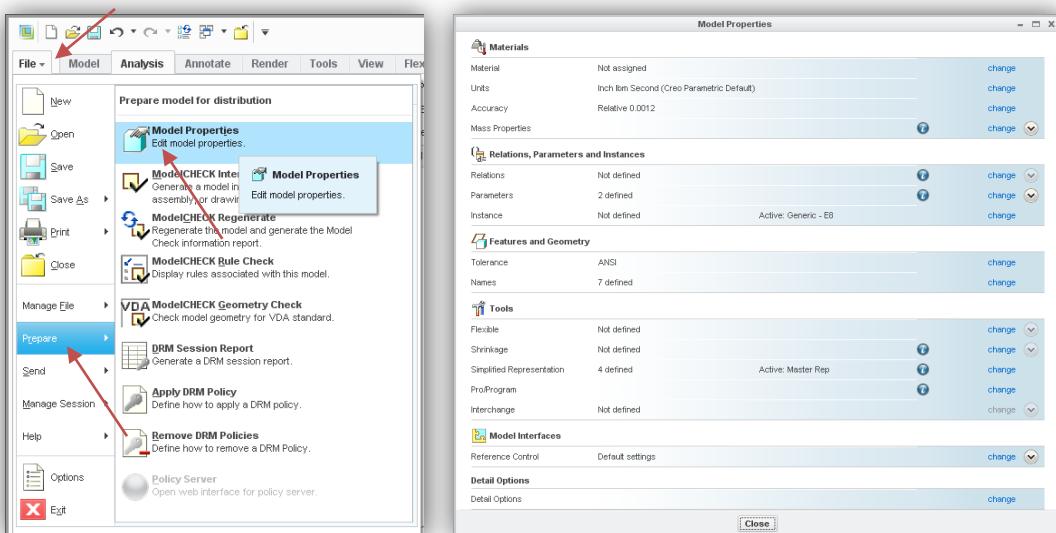

View options

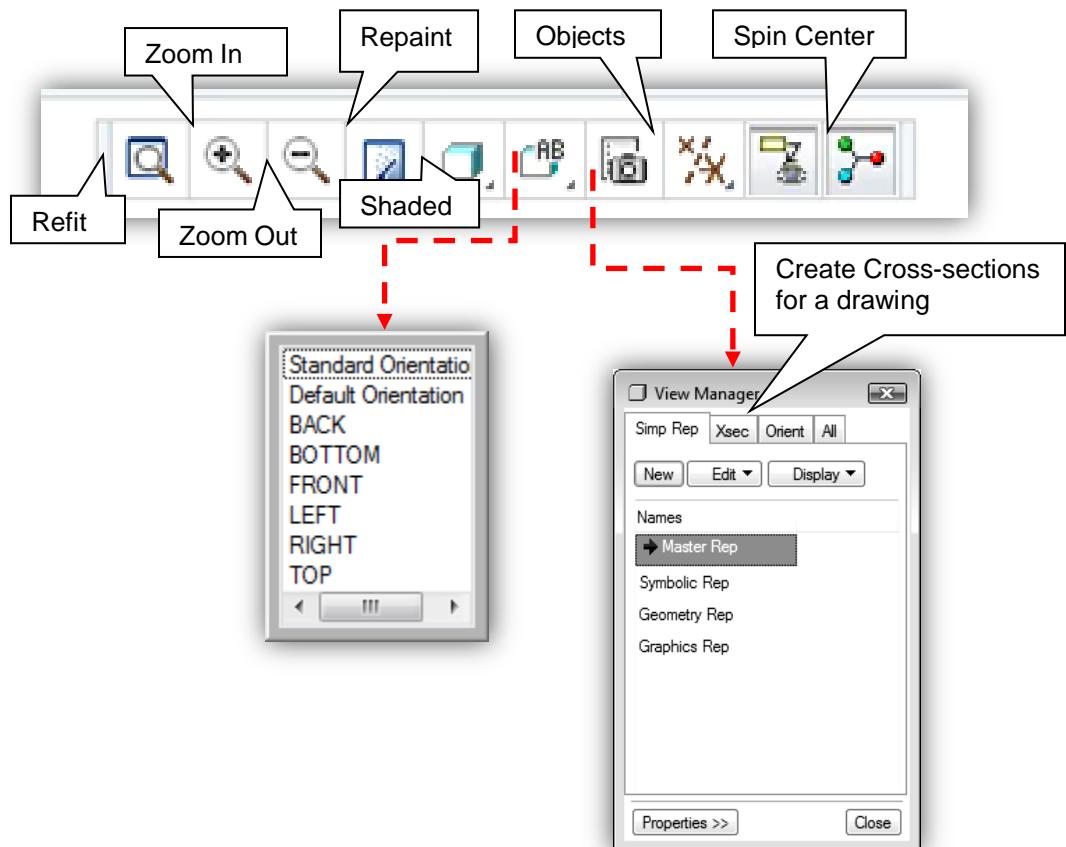

Sketching

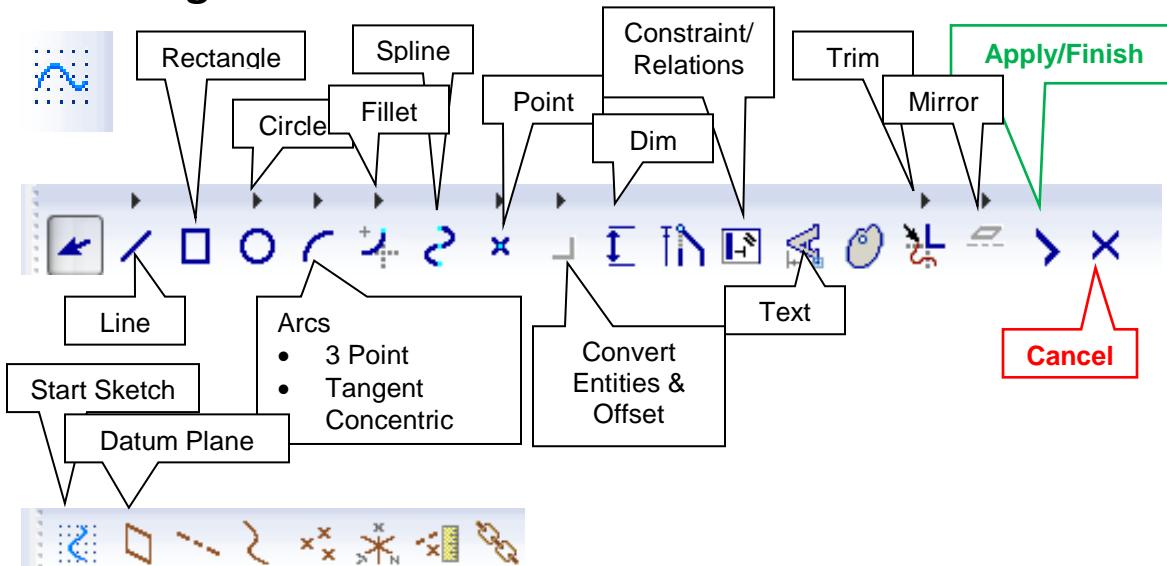


NOTE: If you do not see all of these icons on your interface you can customize the toolbars to bring them up. Right mouse button click on the top grey frame of the window and locate the "customize" option.


Where do you start a sketch?

Sketches can be created on any Datum Plane or Planar Face or Surface. Pro/E provides you with three datum planes centralized at the **Origin** (your zero mark in space)


NOTE: *Planes can also be created and will be discussed in more detail in the future. Also after completing a sketch always select the **Apply/Finish** check mark on the sketch toolbar, this will activate the extrude or revolve feature tools.*

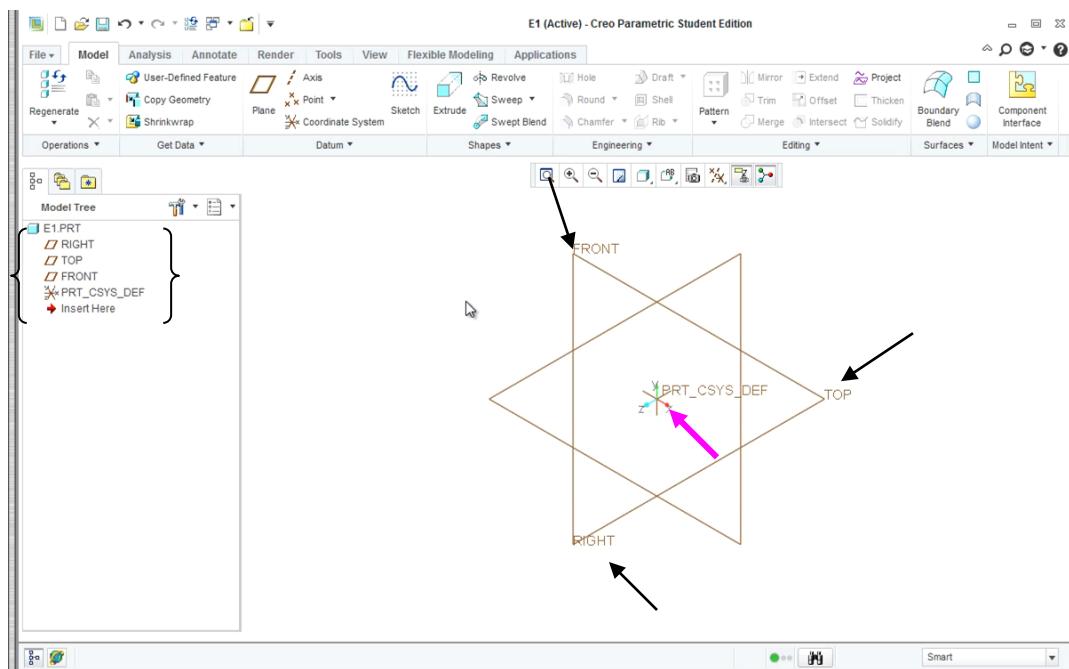

To start a sketch Pre-select the plane or face you desire to sketch on and then select the Sketch Icon. **NOTE:** You can select the planes from the "Feature Manager".



Sketch Options –

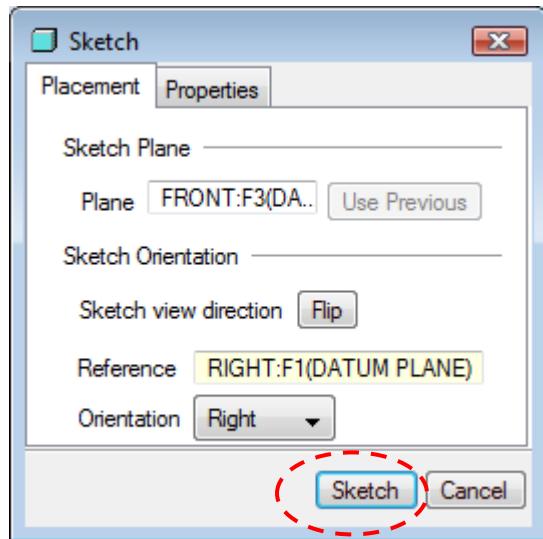


Controlling your geometry...

Pro/E uses two methods for constraining geometric entities.

Constraints and Dimensions

Constraints can be referred to as common elements of geometry such as Tangency, Parallelism, and Concentricity. These elements can be added to geometric entities automatically or manually during the design process.


Here is an example of adding a relationship between two geometric entities.

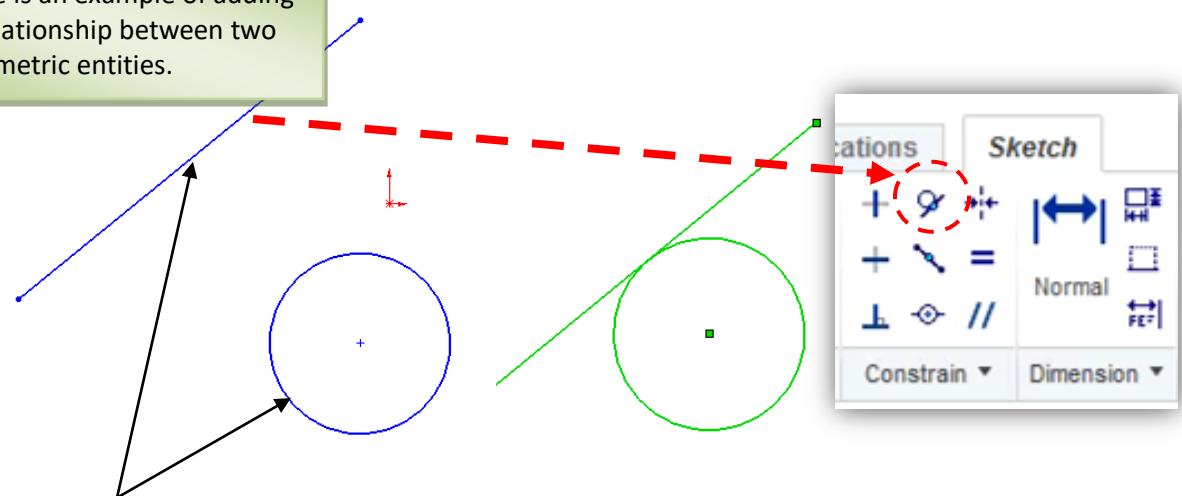


Cautious sketching can save time.

There are 3 primary file types in Creo, which include...

1. **Part** (.prt)
Single part or volume.
2. **Assembly** (.asm)
Multiple parts in one file assembled.
3. **Drawing** (.drw)
The 2D layout containing views, dimensions, and annotations.

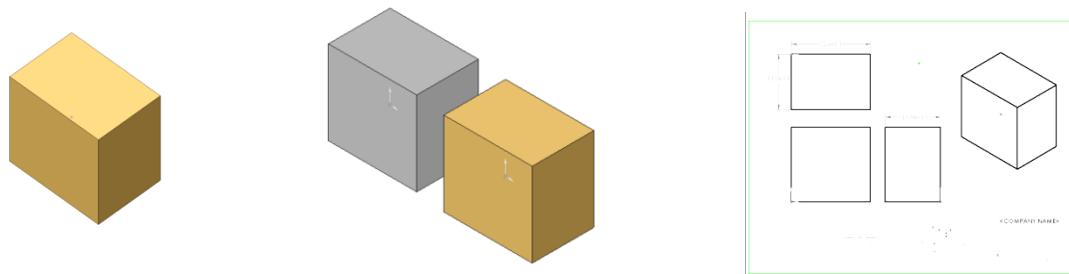


Switching between documents (Activating a document)

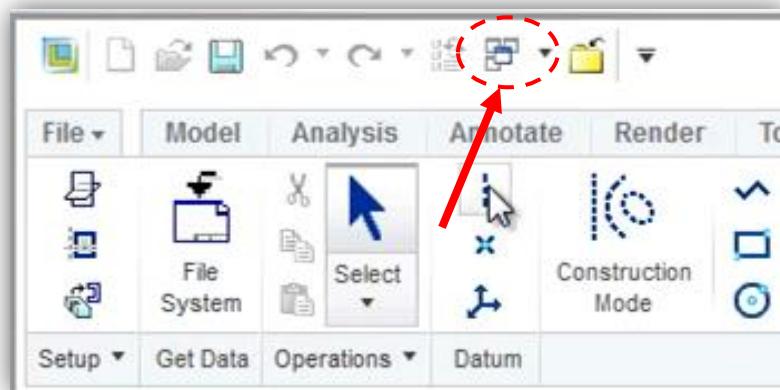


Select the Window pull-down menu and you will see the available documents. Click on the document you wish to work on from the list to “activate” it.

Sketch Constraints (Relations)

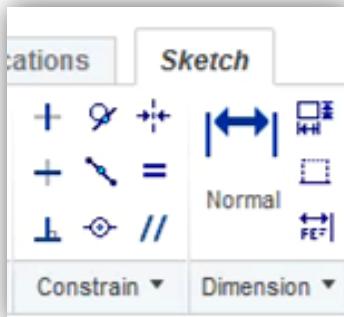

Constraint	Geometric entities to select	Resulting Constraint
Horizontal or Vertical	One or more lines or two or more points.	The lines become horizontal or vertical (as defined by the current sketch space). Points are aligned horizontally or vertically.
Collinear	Two or more lines.	The items lie on the same infinite line.
Perpendicular	Two lines.	The two items are perpendicular to each other.
Parallel	Two or more lines. A line and a plane (or a planar face) in a 3D sketch.	The items are parallel to each other. The line is parallel to the selected plane.
Tangent	An arc, ellipse, or spline, and a line or arc.	The two items remain tangent.
Concentric	Two or more arcs, or a point and an arc.	The arcs share the same centerpoint.
Midpoint	Two lines or a point and a line.	The point remains at the midpoint of the line.
Coincident	A point and a line, arc, or ellipse.	The point lies on the line, arc, or ellipse.
Equal	Two or more lines or two or more arcs.	The line lengths or radii remain equal.
Symmetric	A centerline and two points, lines, arcs, or ellipses.	The items remain equidistant from the centerline, on a line perpendicular to the centerline.

Controlling your geometry with dimensions...


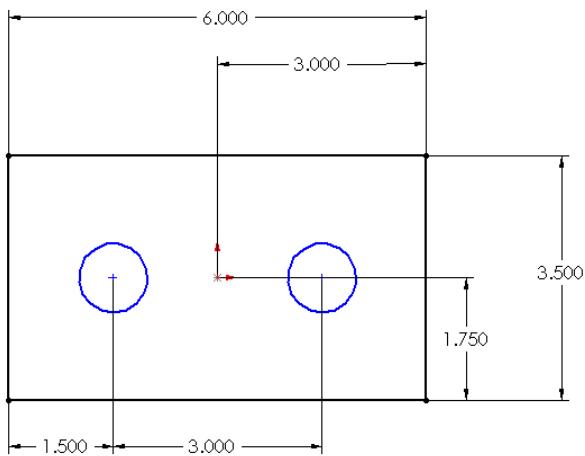


Strong versus Weak

Dimensions -
Double click and
change to make
them Strong!


Dimensioning this way will
enable the length of the
bracket to change but the
holes will always remain
positioned to 1.5" off each

Dimensioning this way will
enable the length of the
bracket to change but the
holes will always remain
positioned to the left side.

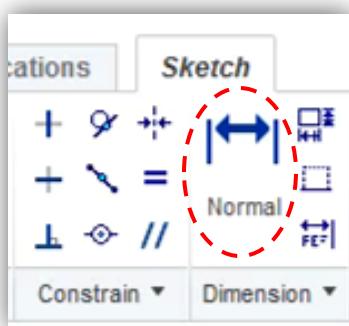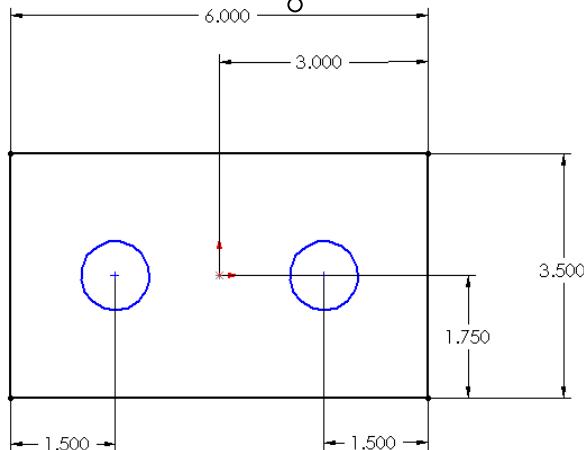

Solid Modeling Basics

Layer Cake method






Extruded Boss/Base (Creates/Adds material)




Extruded Cut (Removes material)

Ingredients:


- Profile

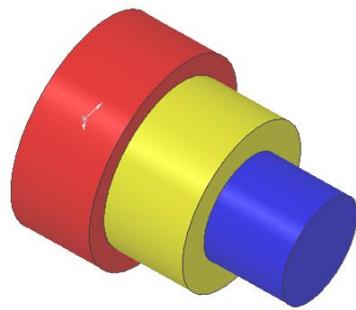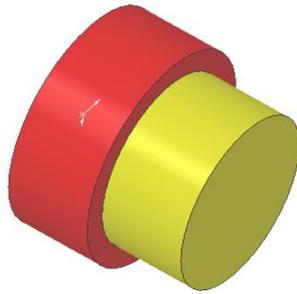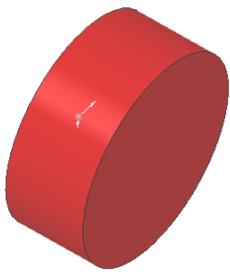

Revolve method






Revolve Boss/Base (Creates/Adds material)



Revolve Cut (Removes material)

Ingredients:


- Profile
- Center Line (*Note: The profile cannot cross over the center line!*)

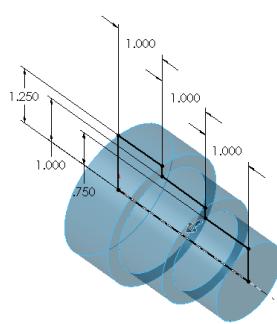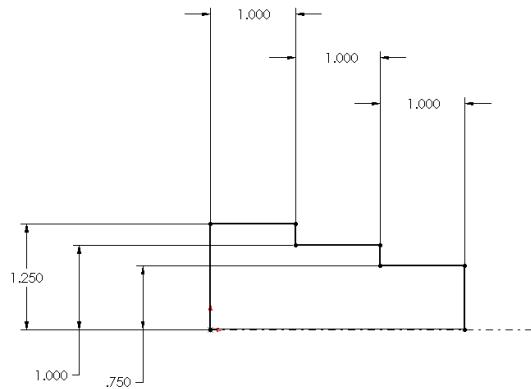


EXERCISE I


Introduction to basic part modeling


Base Extrude Features create a 3D solid representation by extruding a 2 dimensional profile of the entity.

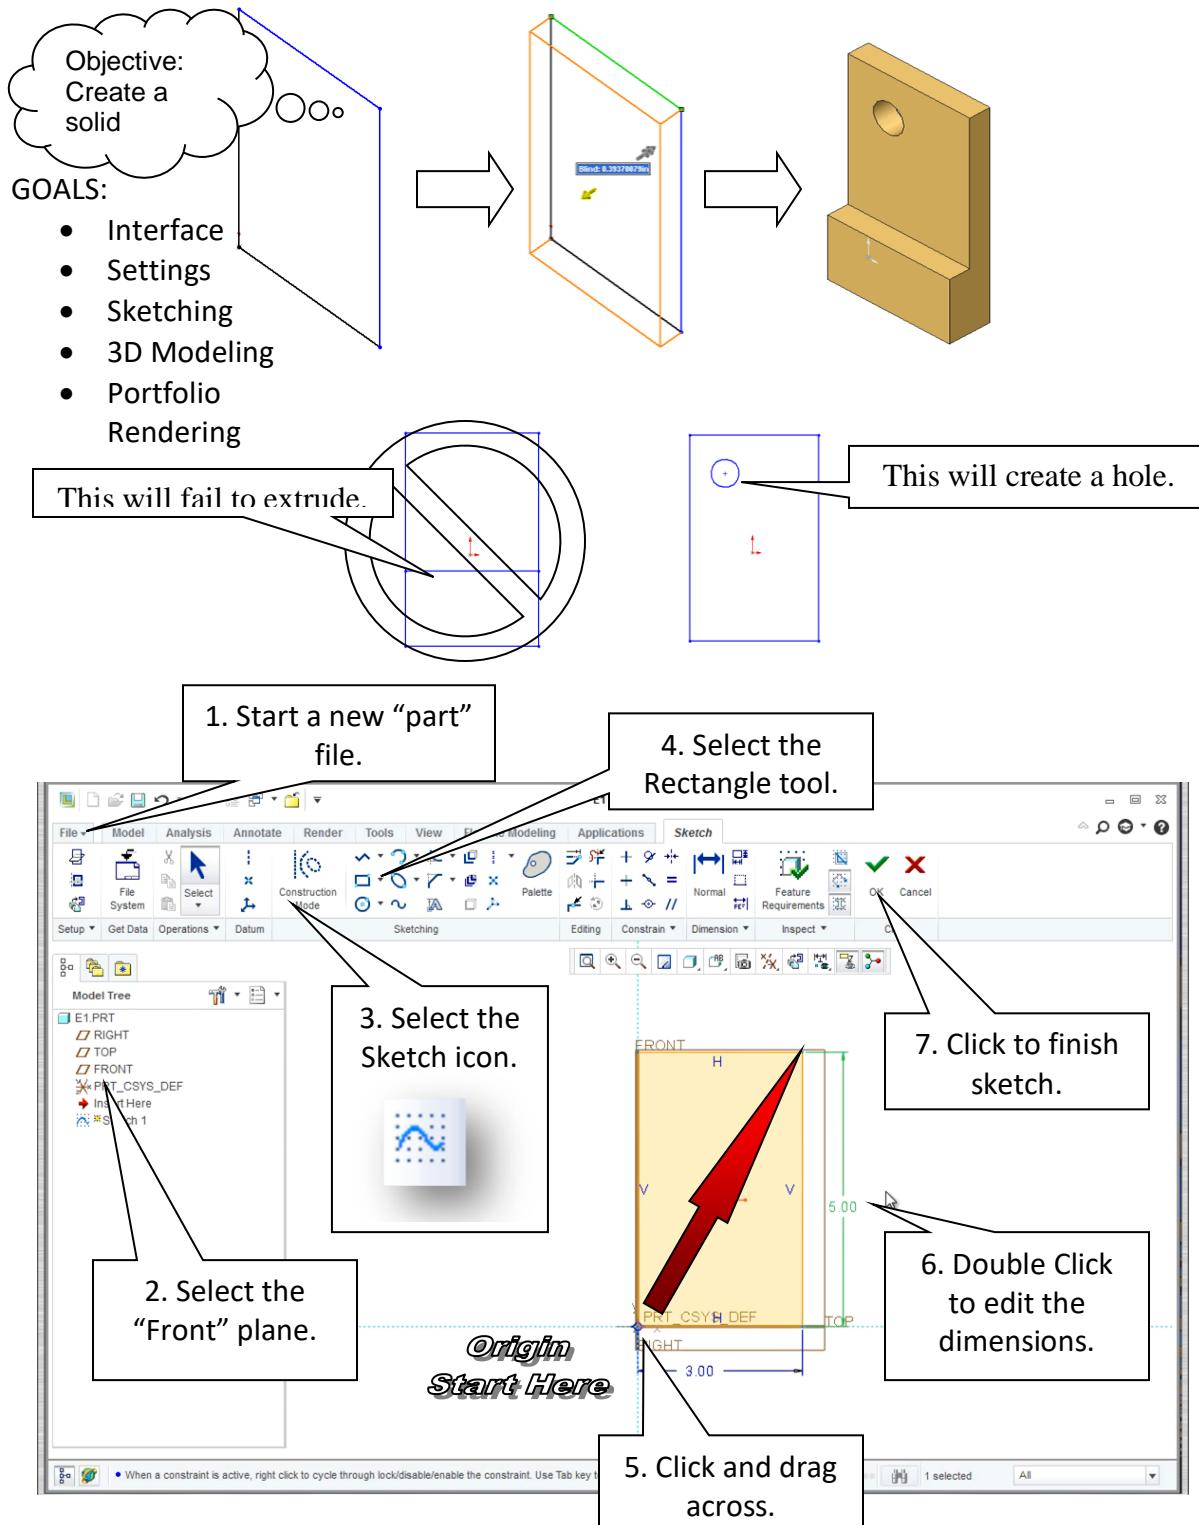

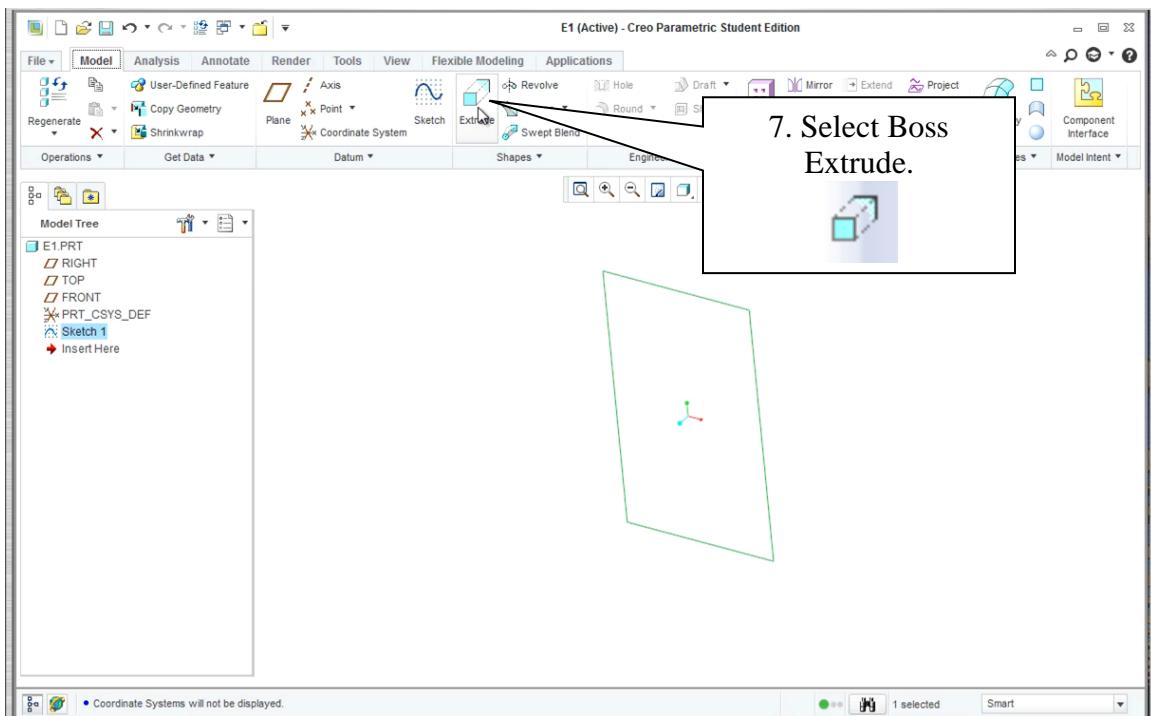


NOTE: When dimensioning use the dimension tool and make edge selections, mouse center button click to apply dimension.

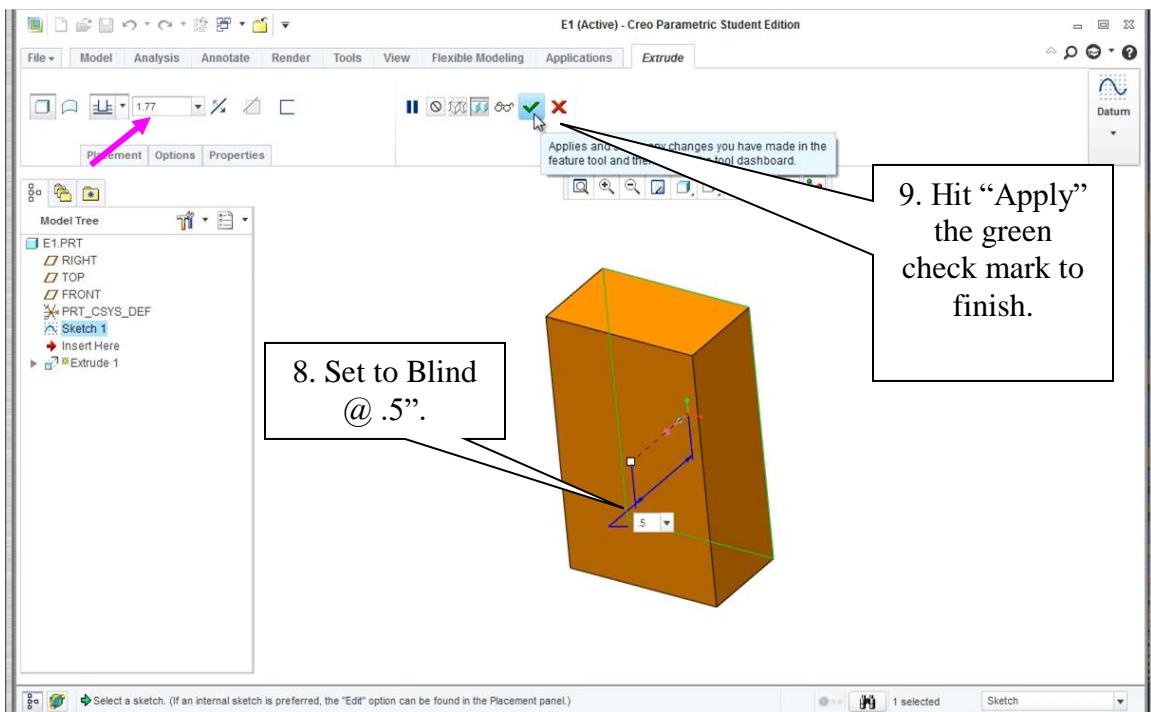


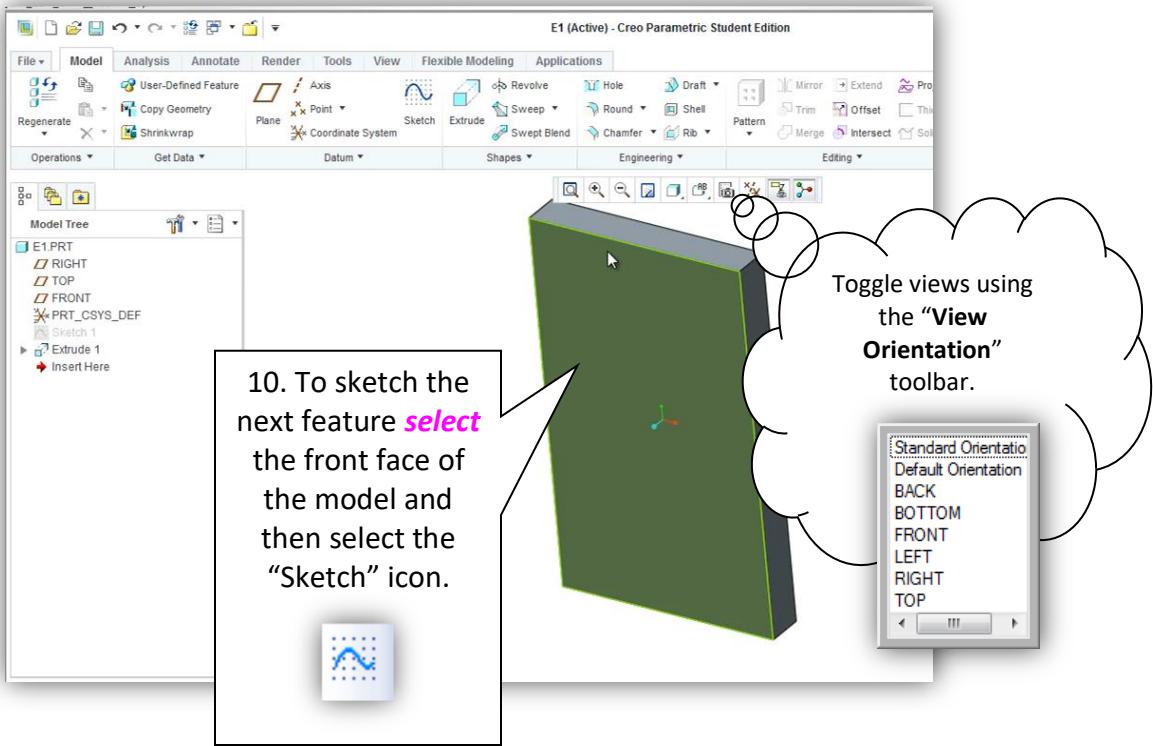


Adding a constraint – Ctrl Select both left edges of sketch and solid. Select Coincident

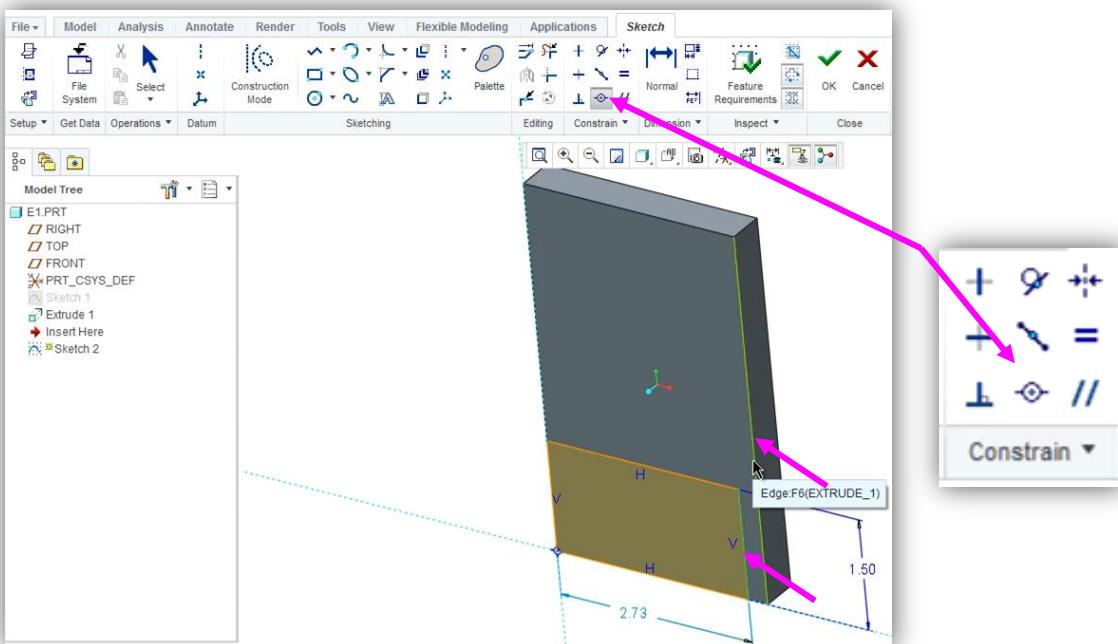


Extrude

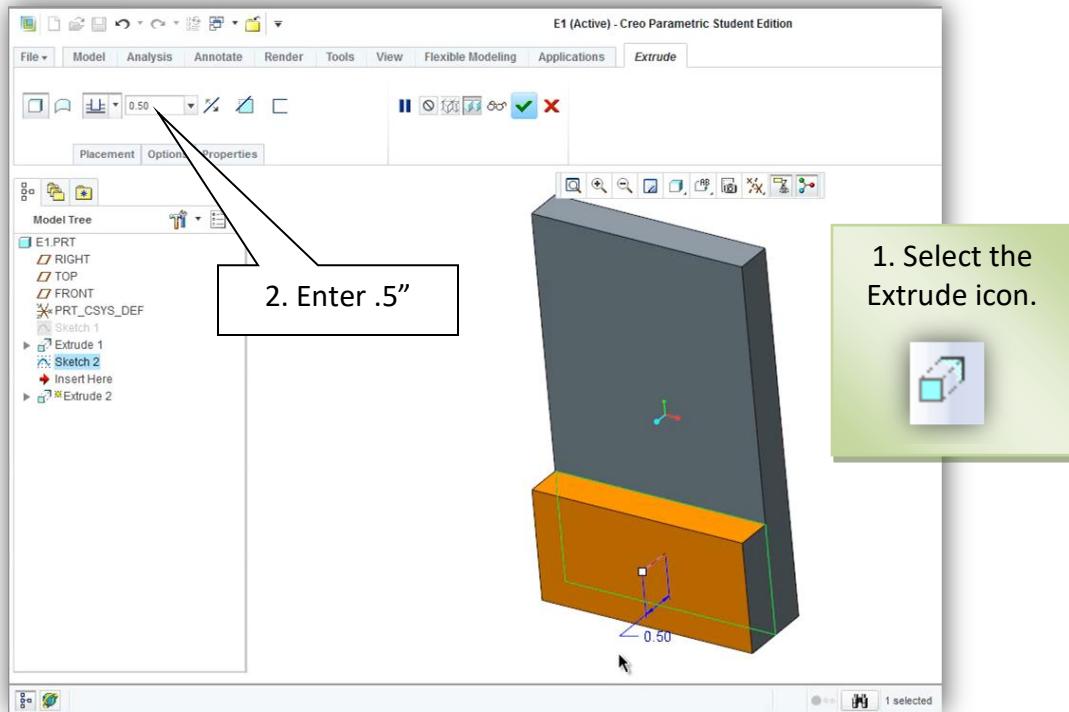


Select the face, select sketch icon and draw a circle on the face. Dimension, Hit "Ok"

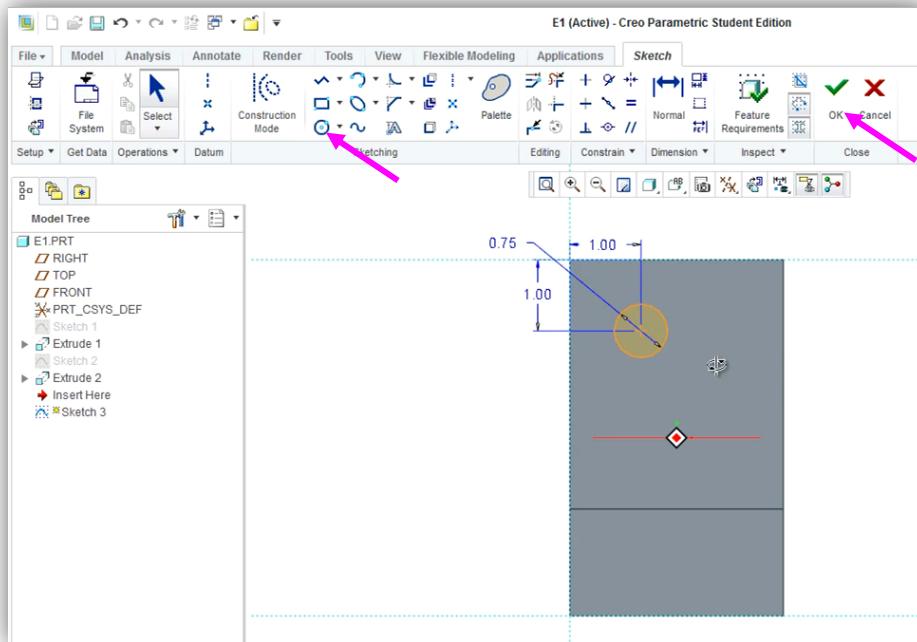

Extrude Cut

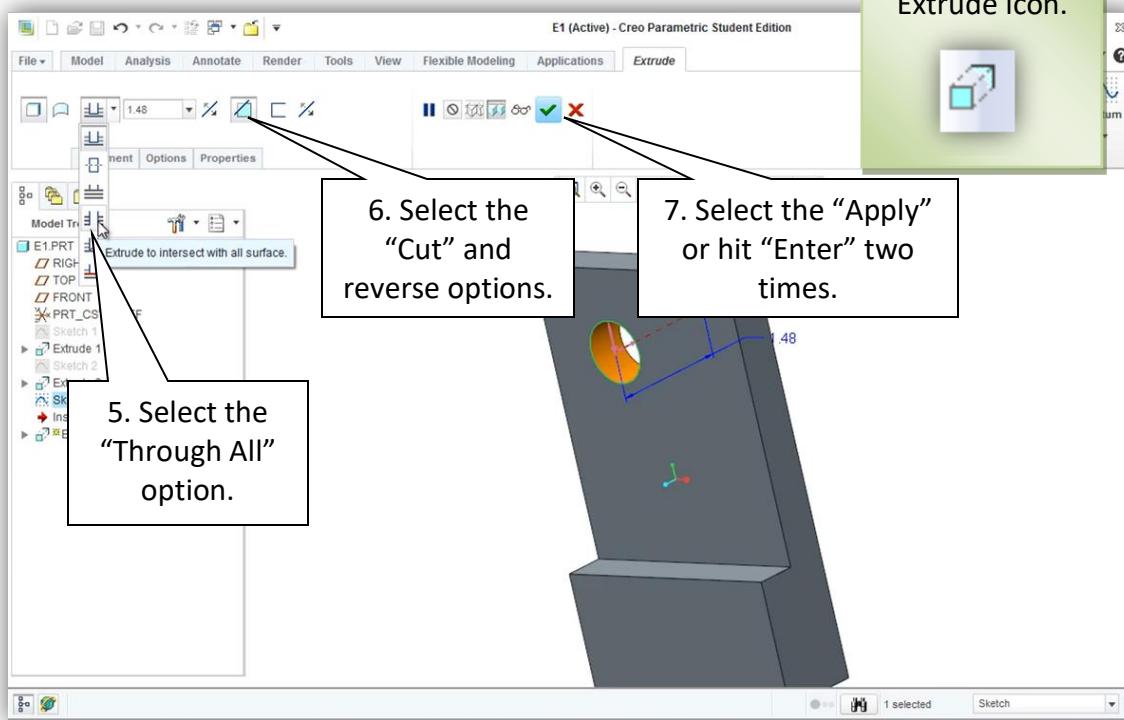


Go to file save and save-as “E1”

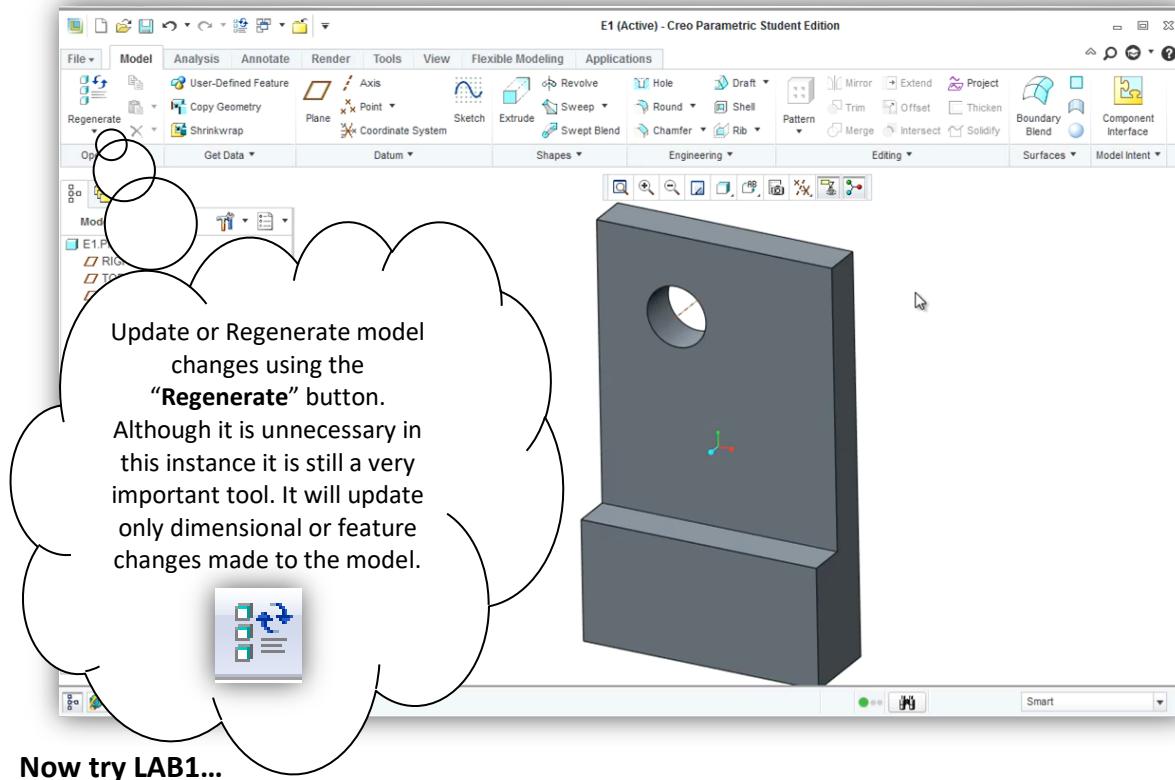


Now try LAB1...

NOTE: Patterns/Arrays and Mirroring will be covered in the next three chapters. Please try to model LAB 1 without using them. It's good practice to just dimension and sketch all geometry when first starting out learning this software.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>; ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.																																							
<table border="1"> <thead> <tr> <th colspan="2">UNLESS OTHERWISE SPECIFIED:</th> <th>NAME</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td colspan="2">DIMENSIONS ARE IN INCHES</td> <td>DRAWN</td> <td></td> </tr> <tr> <td colspan="2">TOLERANCES:</td> <td>CHECKED</td> <td></td> </tr> <tr> <td>FRACTIONAL ±</td> <td>ANGULAR: MACH. ±</td> <td>BEND ±</td> <td></td> </tr> <tr> <td>TWO PLACE DECIMAL ±</td> <td>ENG APPR.</td> <td></td> <td></td> </tr> <tr> <td>THREE PLACE DECIMAL ±</td> <td>MFG APPR.</td> <td></td> <td></td> </tr> <tr> <td colspan="2">INTERPRET GEOMETRIC TOLERANCING PER:</td> <td>Q.A.</td> <td></td> </tr> <tr> <td colspan="4">MATERIAL COMMENTS:</td> </tr> <tr> <td>NEXT ASSY</td> <td>USED ON</td> <td>FINISH</td> <td>DO NOT SCALE DRAWING</td> </tr> </tbody> </table>				UNLESS OTHERWISE SPECIFIED:		NAME	DATE	DIMENSIONS ARE IN INCHES		DRAWN		TOLERANCES:		CHECKED		FRACTIONAL ±	ANGULAR: MACH. ±	BEND ±		TWO PLACE DECIMAL ±	ENG APPR.			THREE PLACE DECIMAL ±	MFG APPR.			INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.		MATERIAL COMMENTS:				NEXT ASSY	USED ON	FINISH	DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED:		NAME	DATE																																				
DIMENSIONS ARE IN INCHES		DRAWN																																					
TOLERANCES:		CHECKED																																					
FRACTIONAL ±	ANGULAR: MACH. ±	BEND ±																																					
TWO PLACE DECIMAL ±	ENG APPR.																																						
THREE PLACE DECIMAL ±	MFG APPR.																																						
INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.																																					
MATERIAL COMMENTS:																																							
NEXT ASSY	USED ON	FINISH	DO NOT SCALE DRAWING																																				
SIZE A Part 1		DWG. NO. REV SCALE: 1:1 WEIGHT: SHEET 1 OF 1																																					

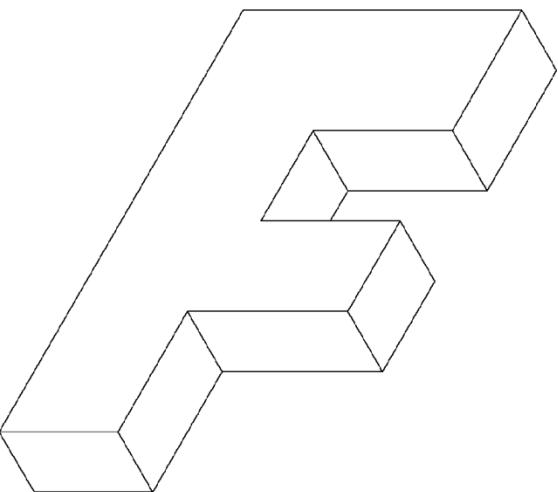

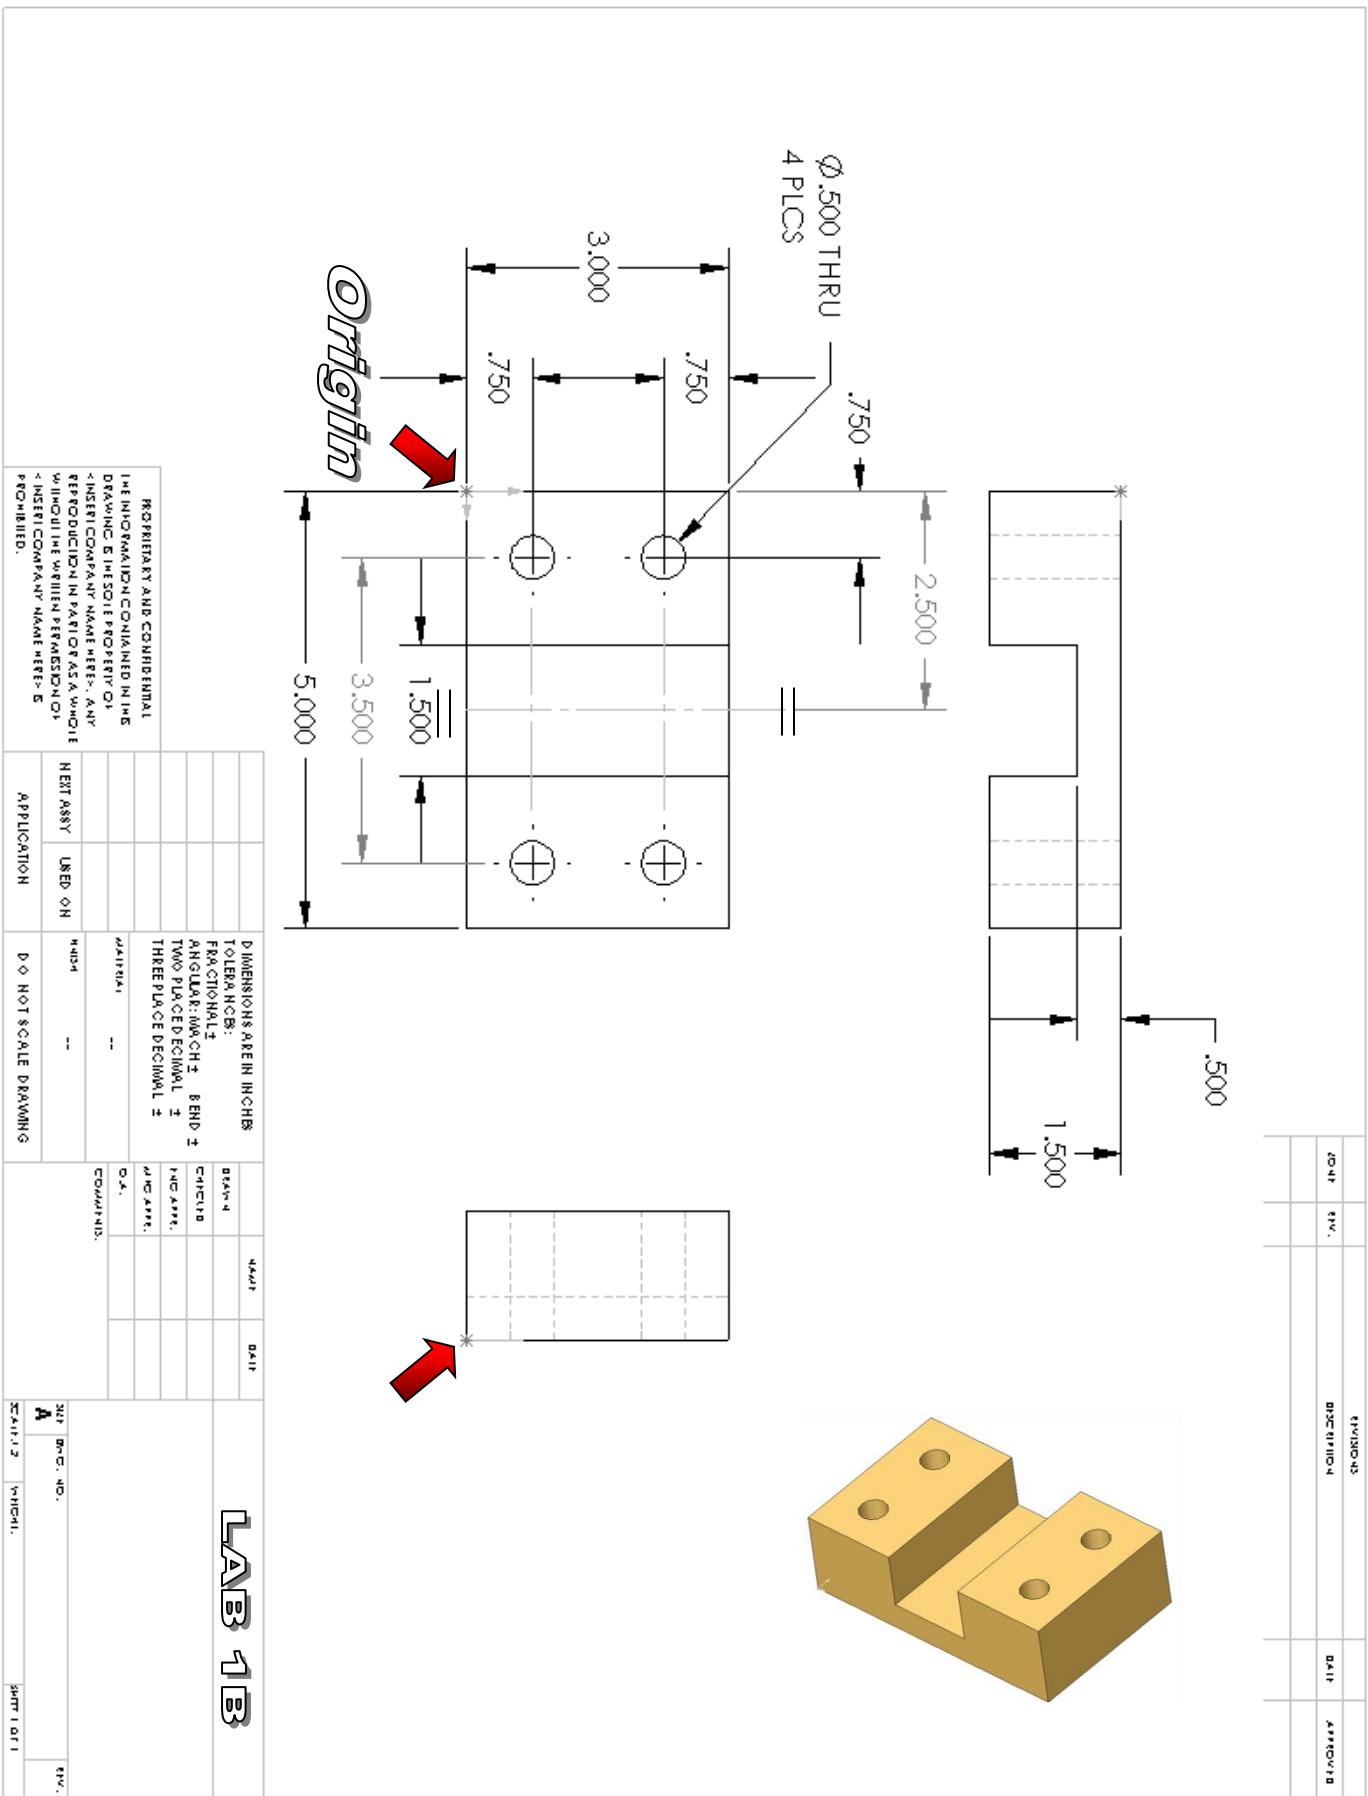


EXERCISE 2

Revolved Features


Revolved Feature - creates features that add or remove material by revolving one or more profiles around a centerline. The feature can be a solid, a thin feature, or a surface.

Tips...

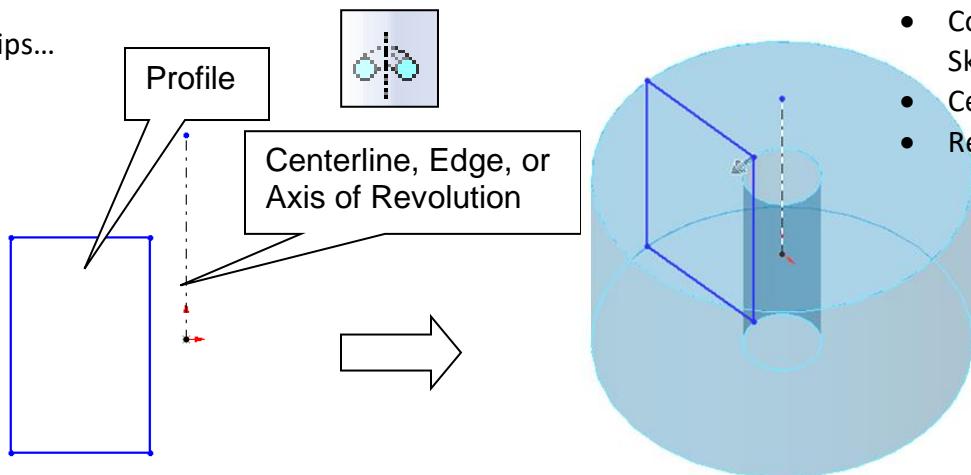


GOALS:


- Complex Sketching
- Centerlines
- Revolves

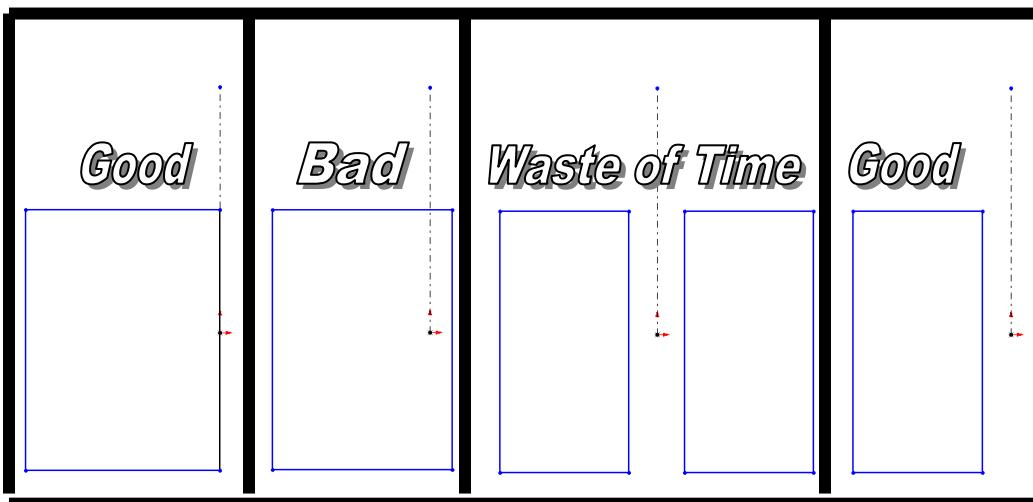


The profile should never cross over the centerline, nor should there be profiles on both sides of the centerline.

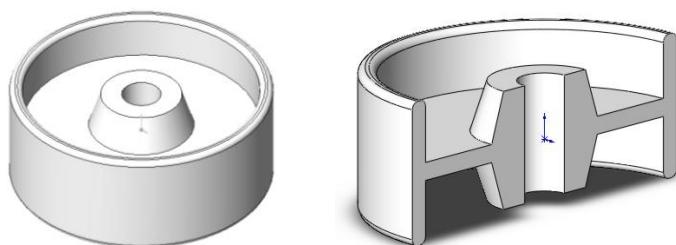


1. Create a new part file (E2) and then start a sketch on the “Front” plane.

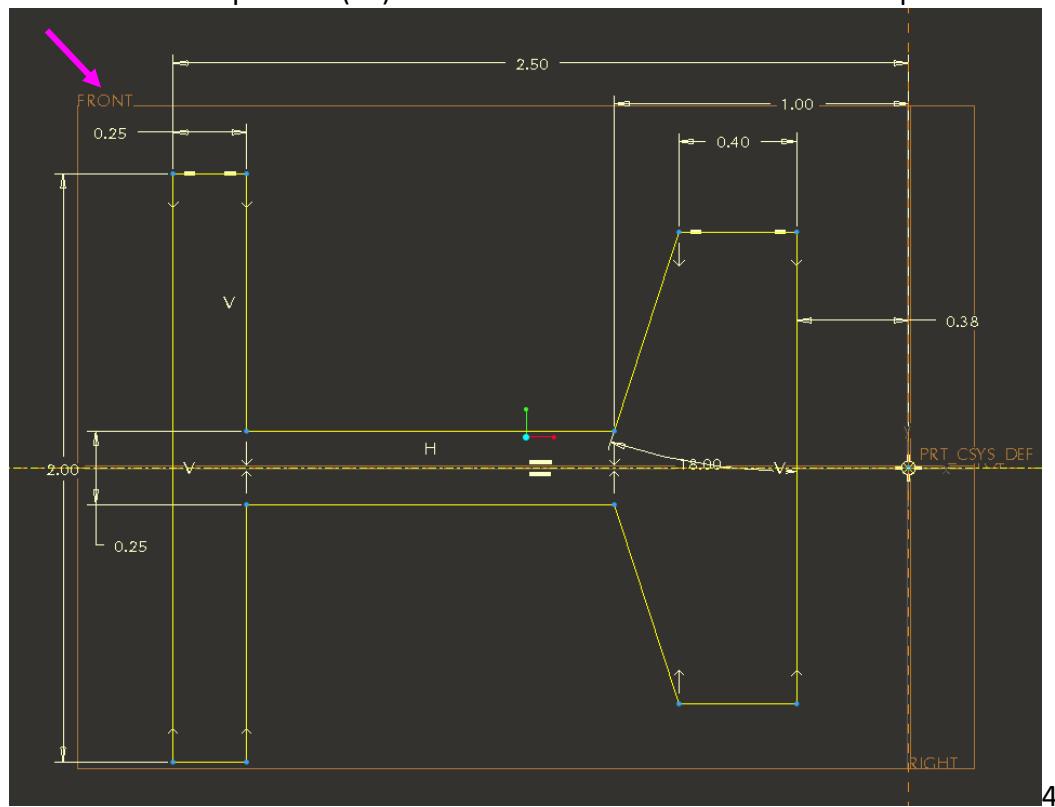


2. Sketch the following. Ctrl select the profile and the horizontal centerline, then using the “Mirror” tool to create a $\frac{1}{4}$ of the geometry and then mirror it to the other side. Make sure you finish adding the dimensions.

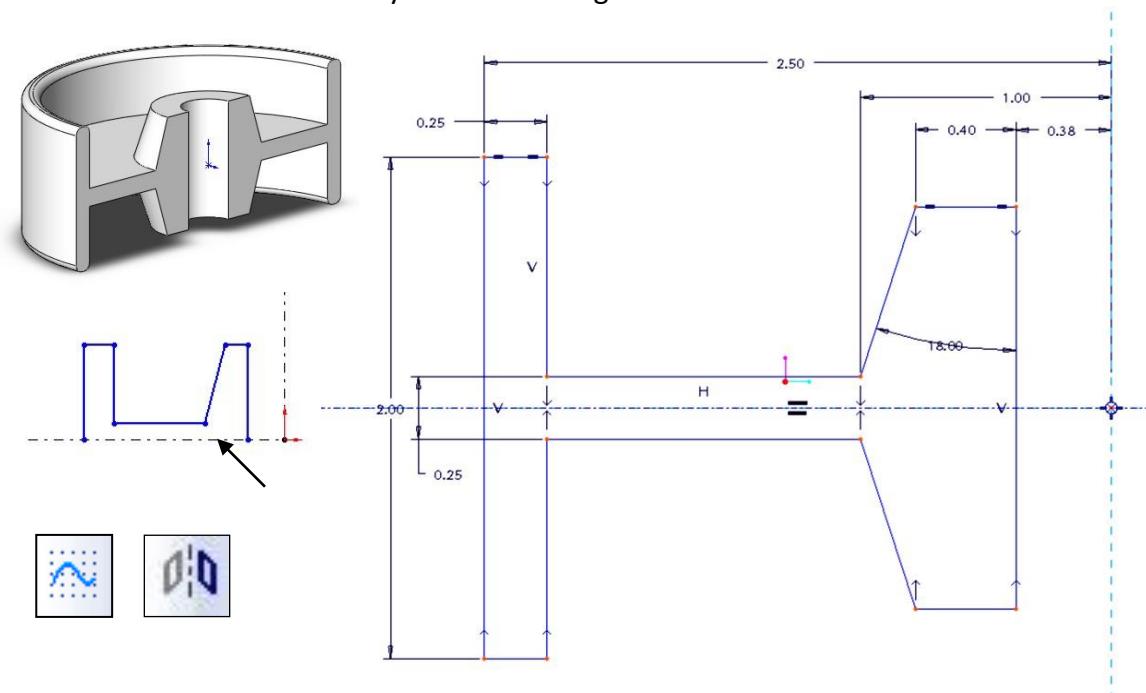

3. Select the **Revolve** feature icon.



Then select the axis/centerline.

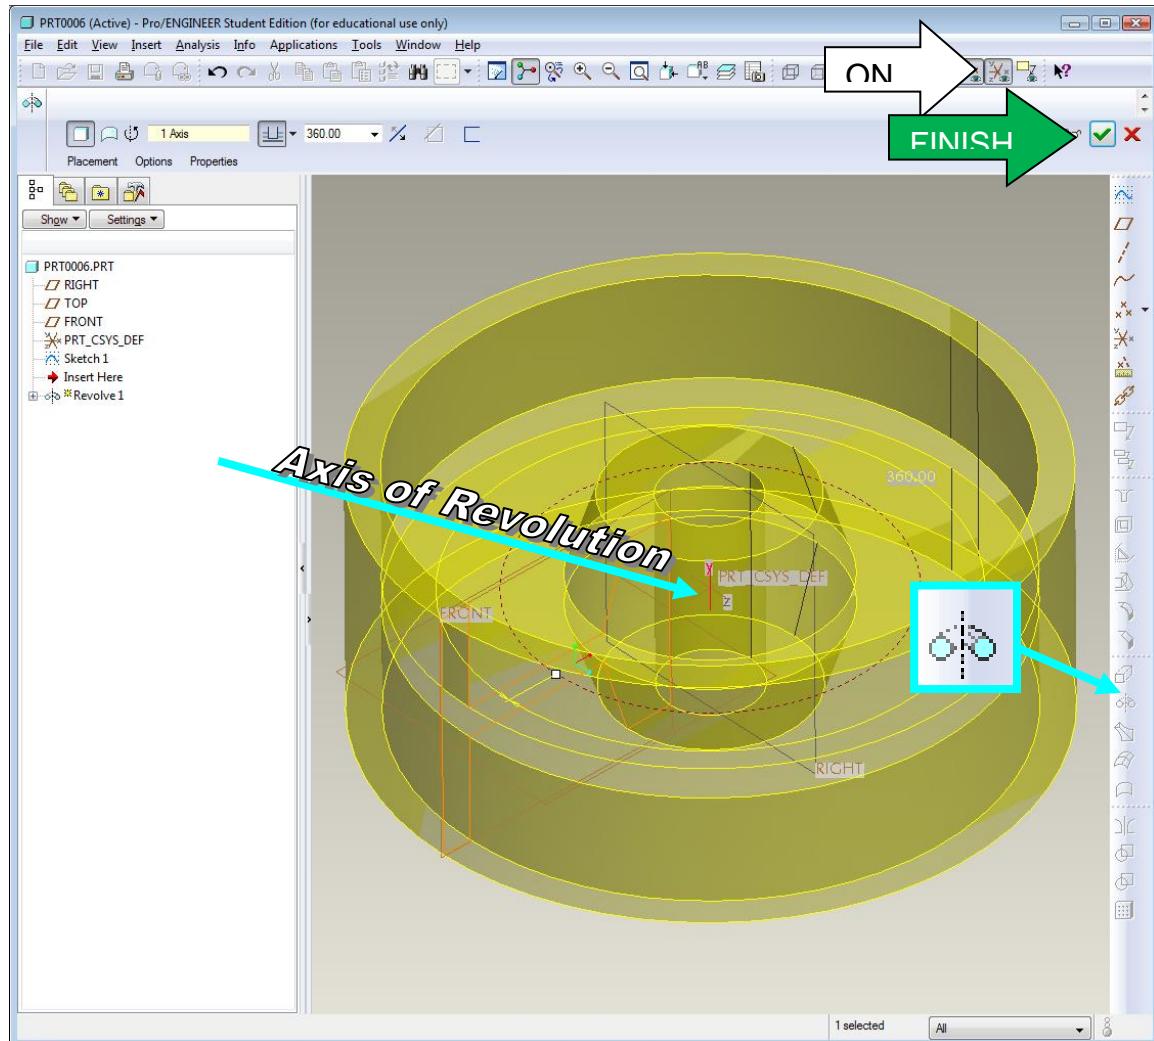


Rounds



4. Select the top and bottom edges and add a R.100"




ends/fillets.

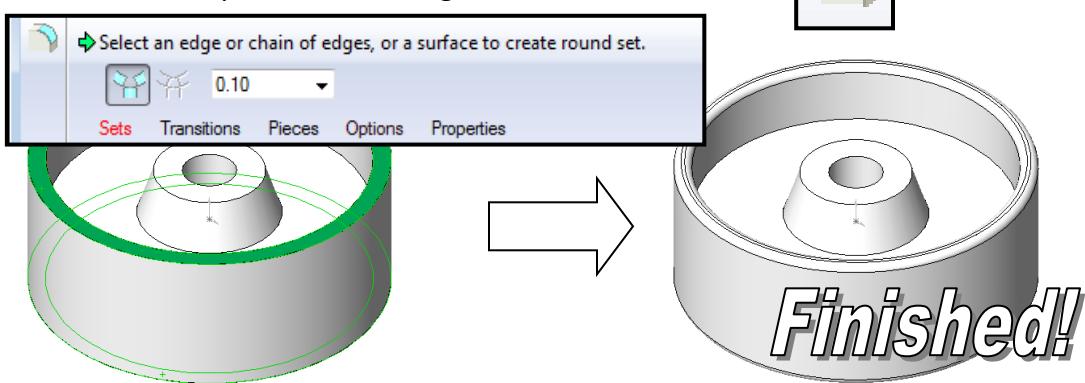

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

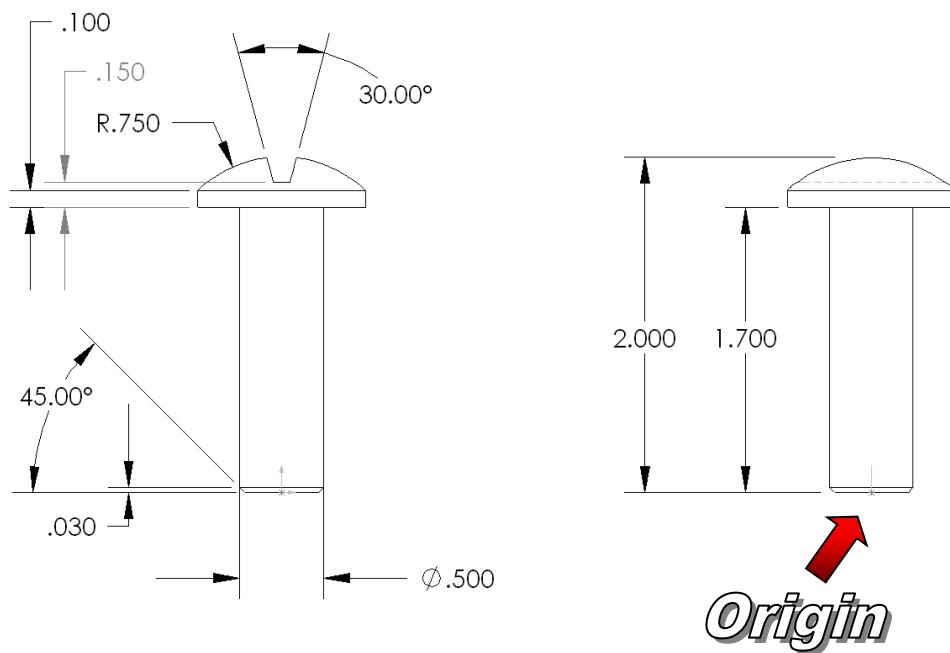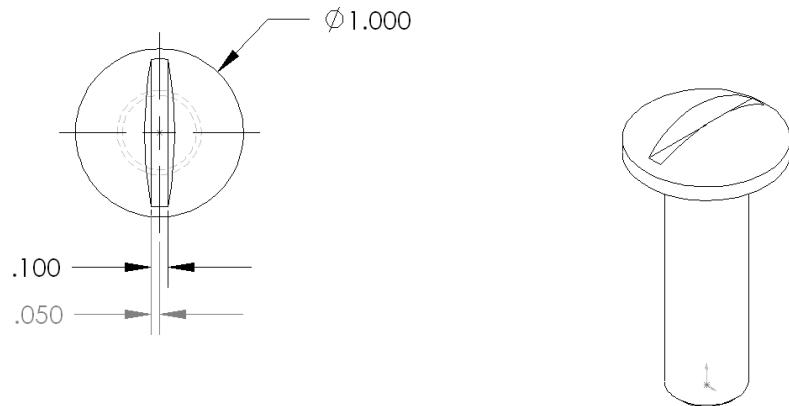


PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.	DIMENSIONS ARE IN INCHES		NAME _____ DATE _____ DRAWN _____ CHECKED _____ ENG APPR. _____ MFG APPR. _____ Q.A. _____ COMMENTS: _____	LAB 2	
	TOLERANCES:				
	FRACTIONAL ±				
	ANGULAR: MACH ± BEND ±				
	TWO PLACE DECIMAL ±				
	THREE PLACE DECIMAL ±				
	MATERIAL —				
	NEXT ASSY	USED ON			
	FINISH —				
	APPLICATION			DO NOT SCALE DRAWING	
		SIZE	DWG. NO.	REV.	
		A			
		SCALE:1:1	WEIGHT:	SHEET 1 OF 1	

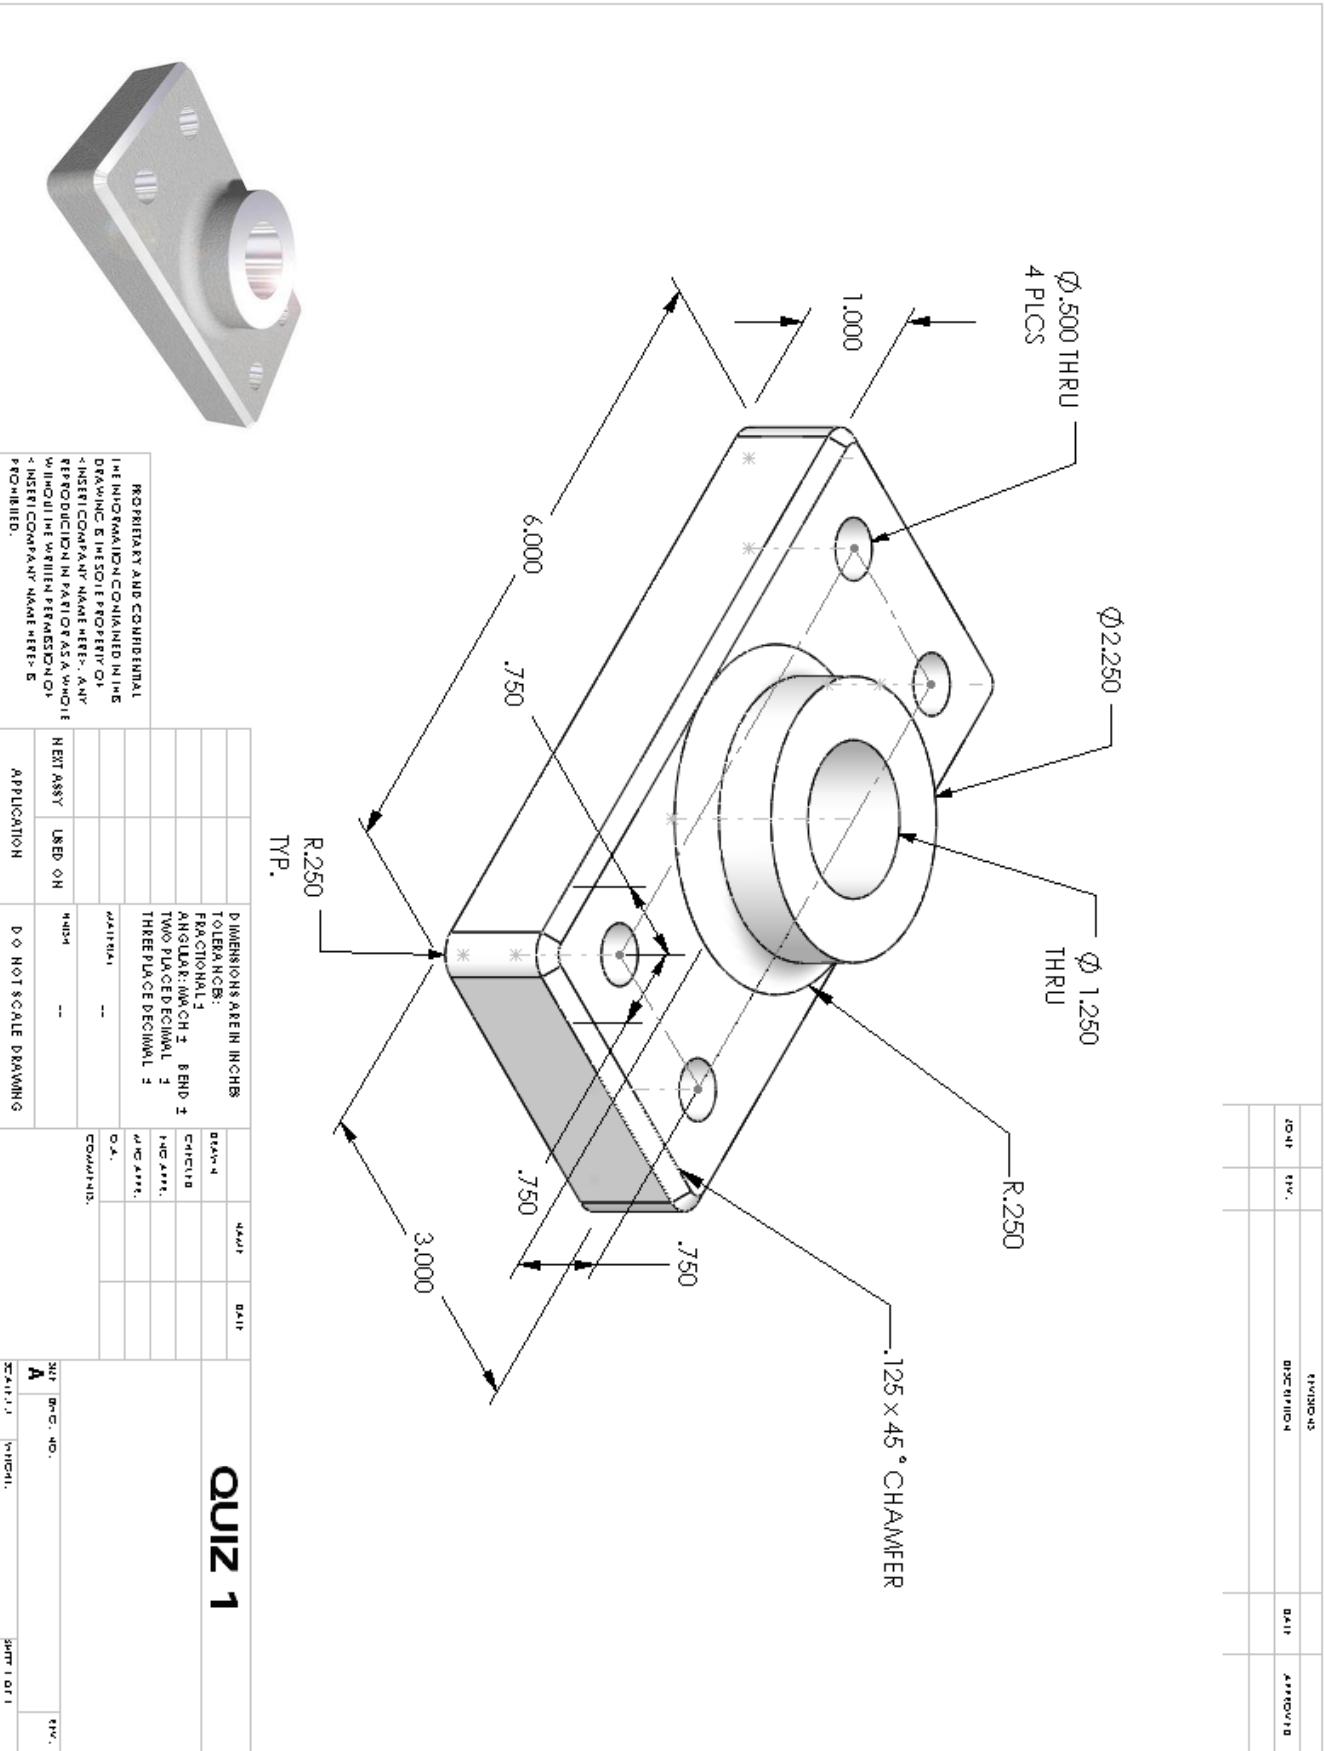


EXERCISE 3

Secondary Feature Modeling


1. Sketch the geometry as show below on the “Front” plane.

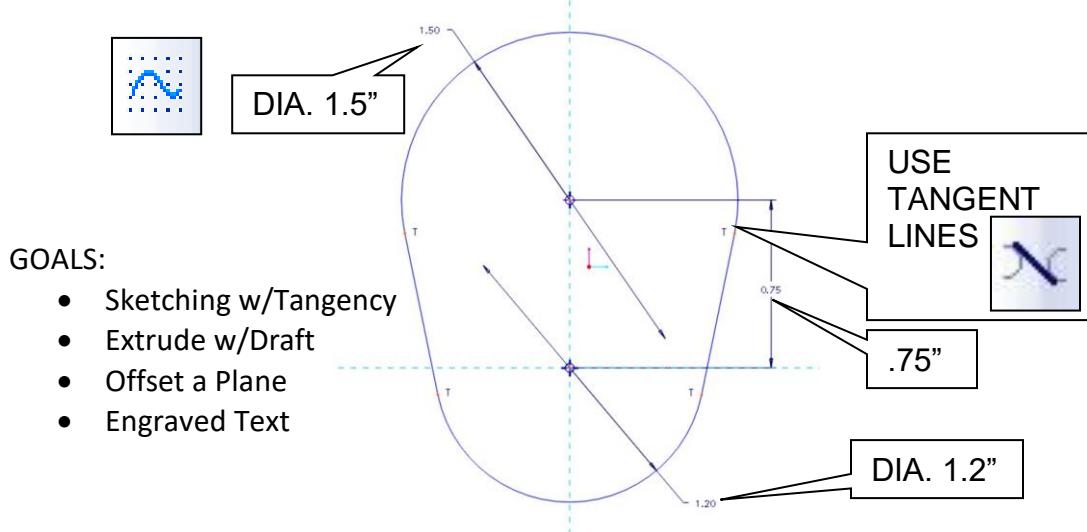


2. **Extrude.** Select Mid-Plane, 1".

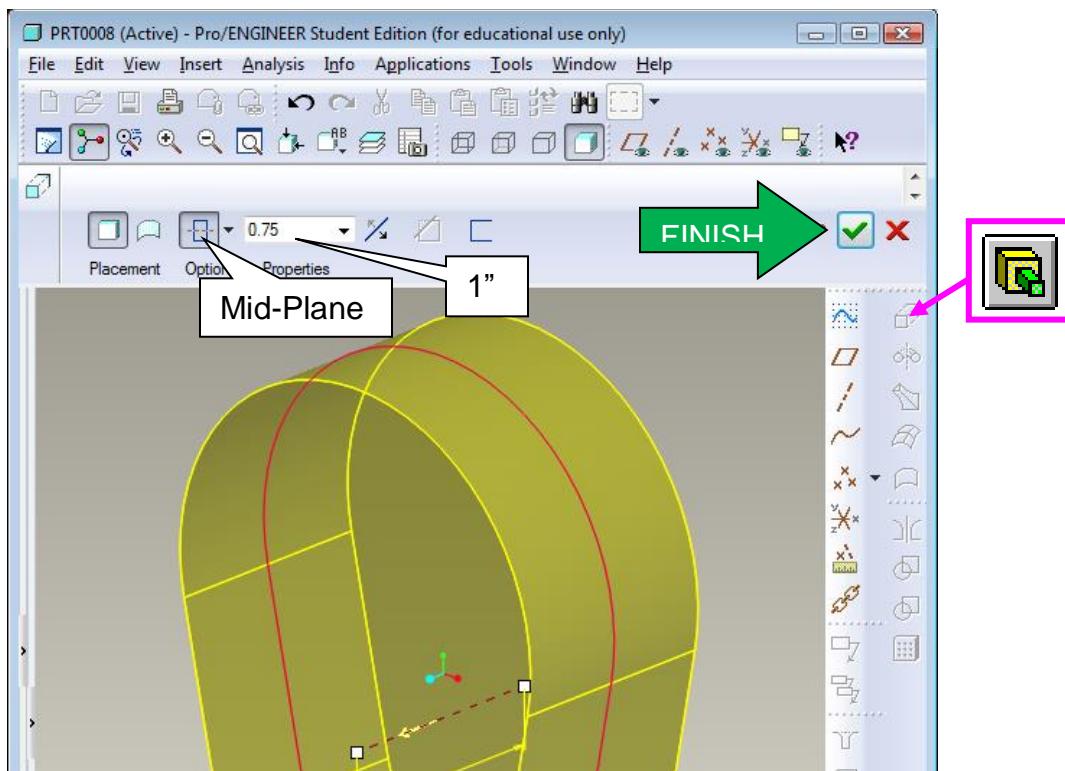


3. **DRAFT:** Select the Draft tool, and then References, Ctrl select all side faces of the model. Then Click on the draft hinges dialog box, and select the **Front Datum Plane**.

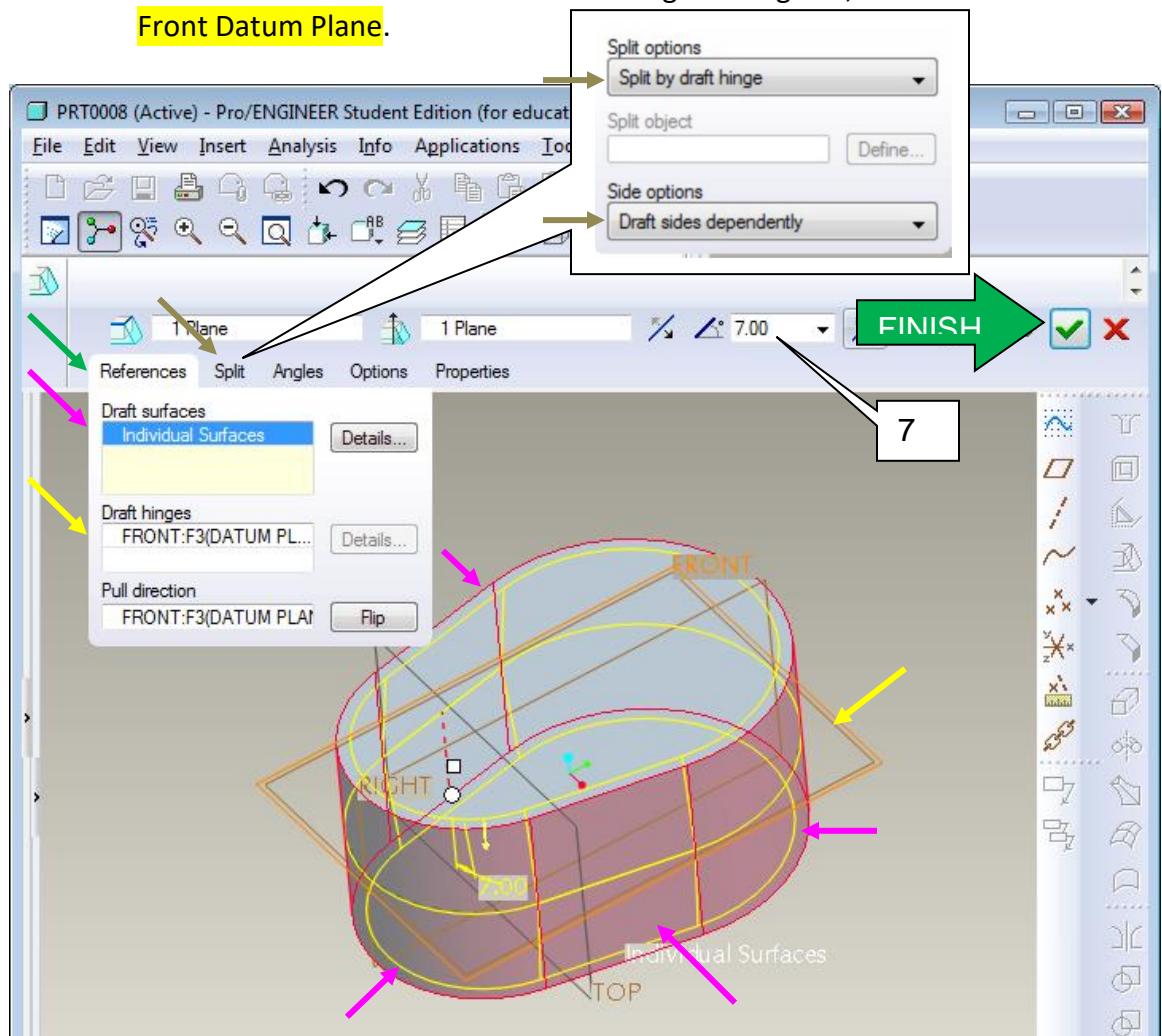


4. Select the top surface (LMB Click 2 x) on the model and start a sketch on it.

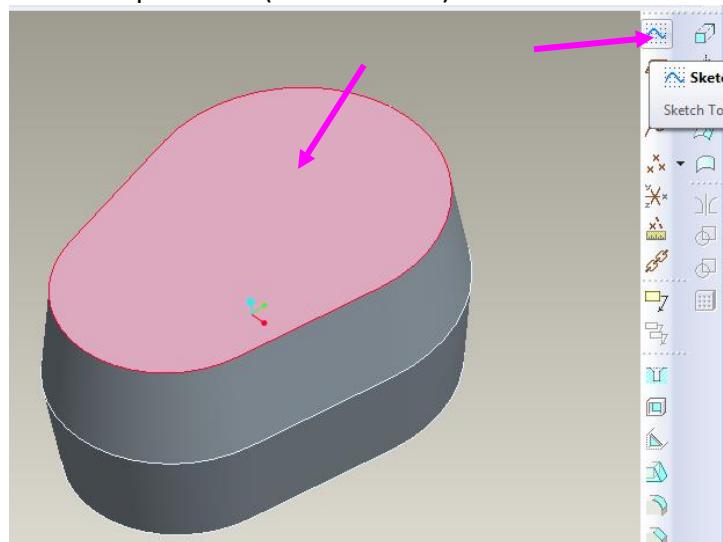


5. **OFFSET:** Select the **Offset** tool. Then select **Loop**. Then select the **face**.

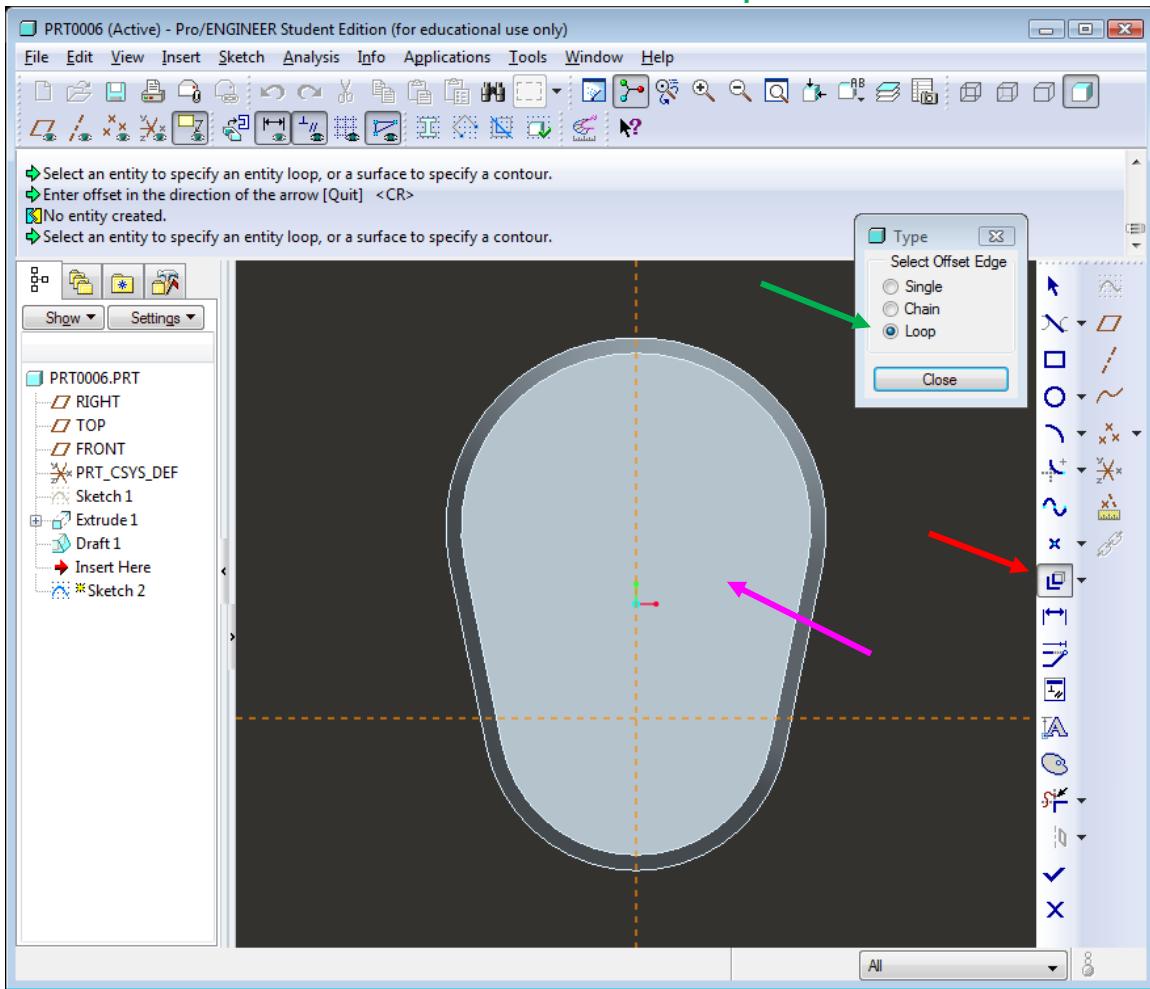


6. Enter **-.125** and to flip the offset direction.

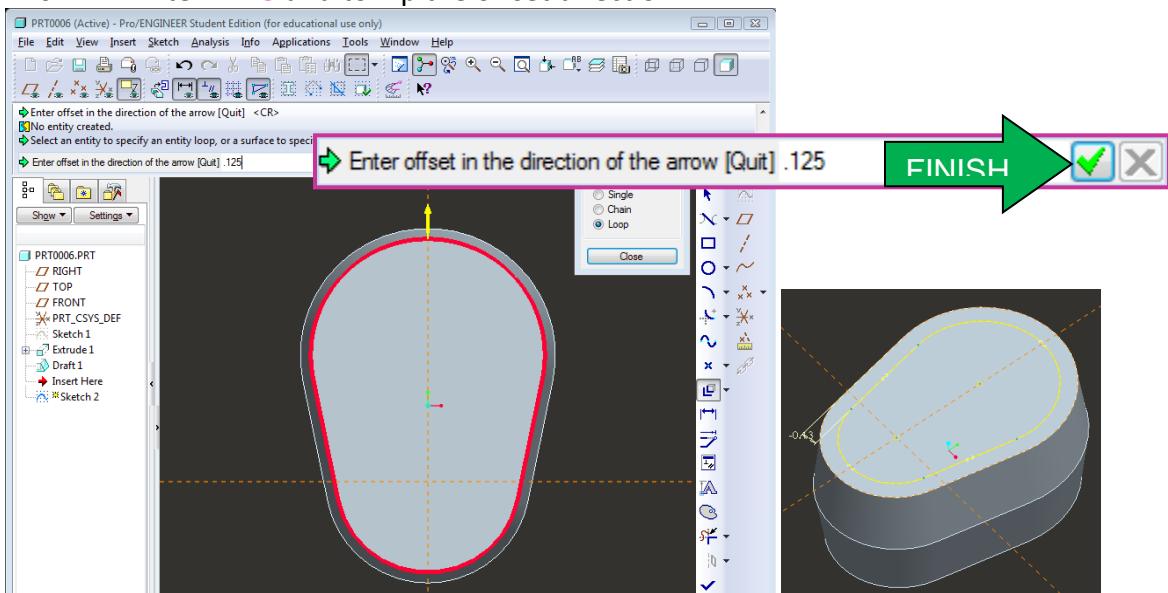


7. Select the **extrude** icon, and then set to **cut** and .125 depth.

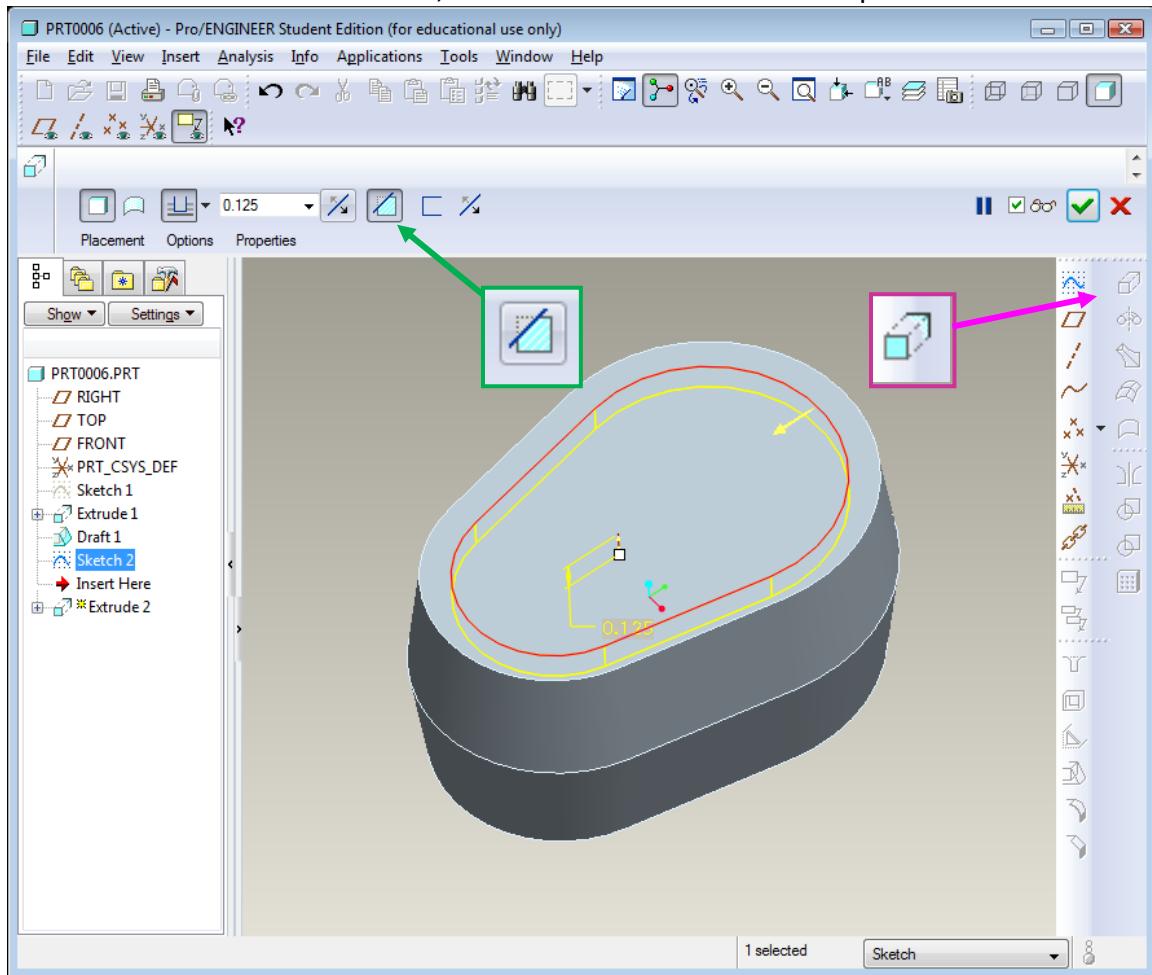


7. Select Concentric (Circle tool), then select the arc edge of the part.

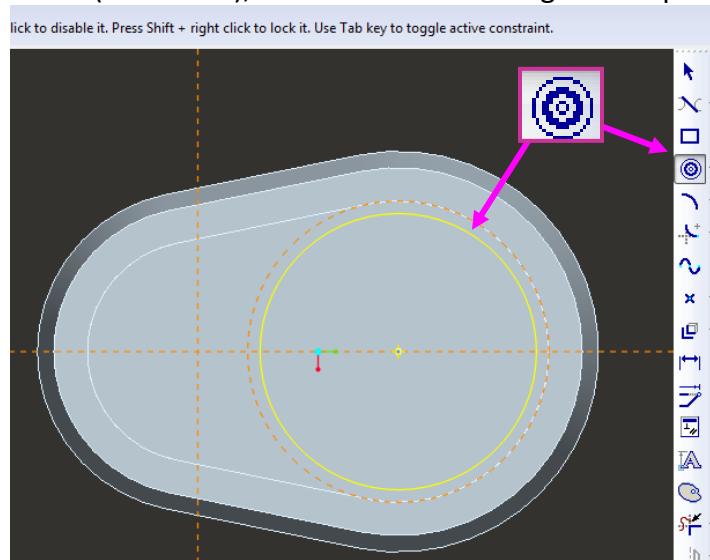


9. Trim the intersection.

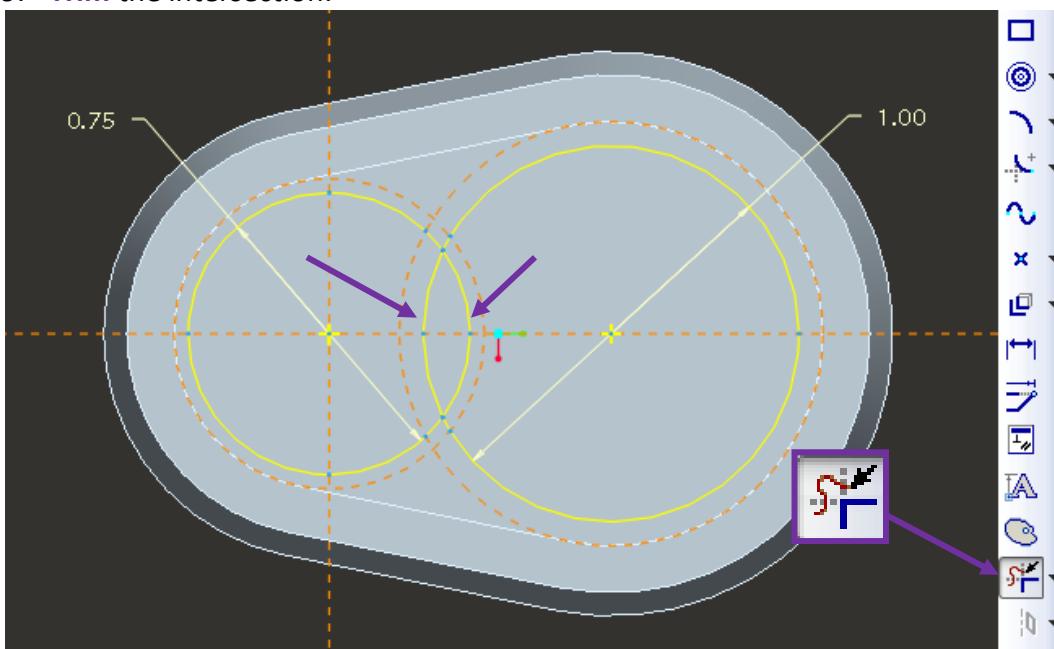


10. Select the extrude icon, and cut .700" depth.

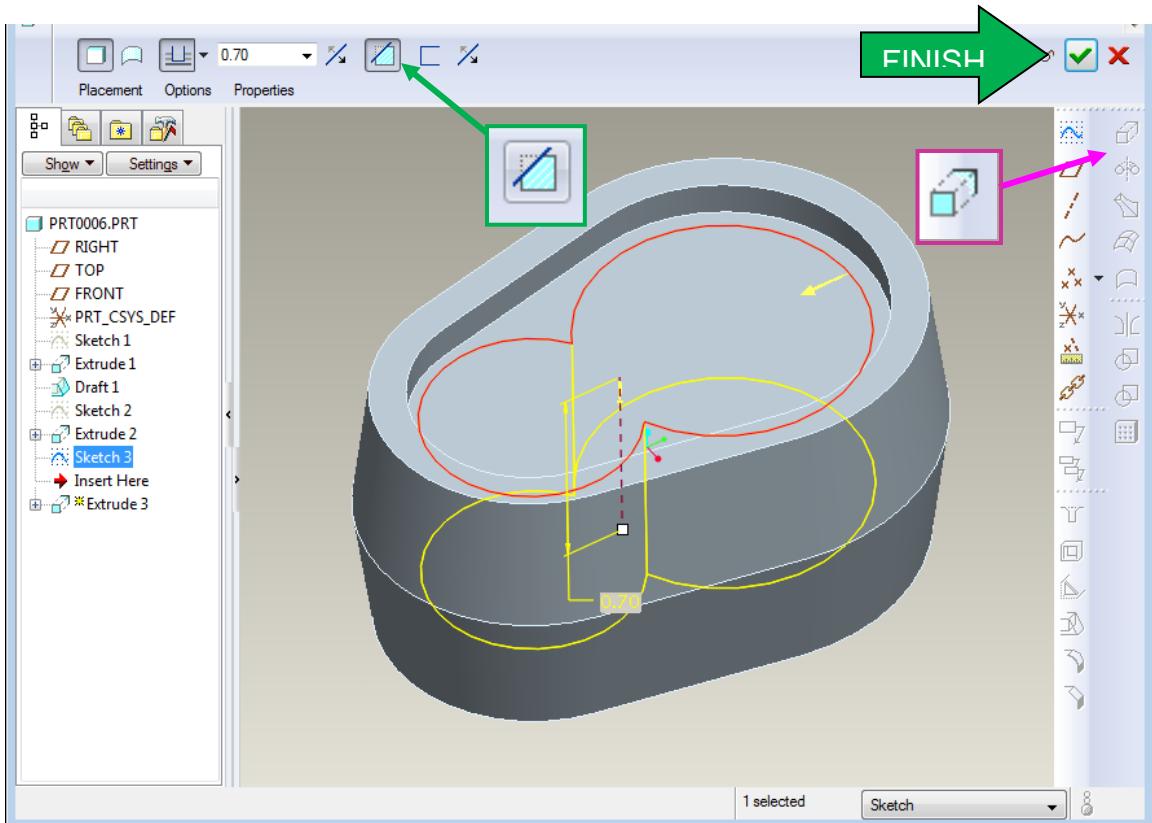


11. Select the base of the pocket and start a sketch. Draw the following two .375 DIA. circles, and extrude / cut “Through-all”.

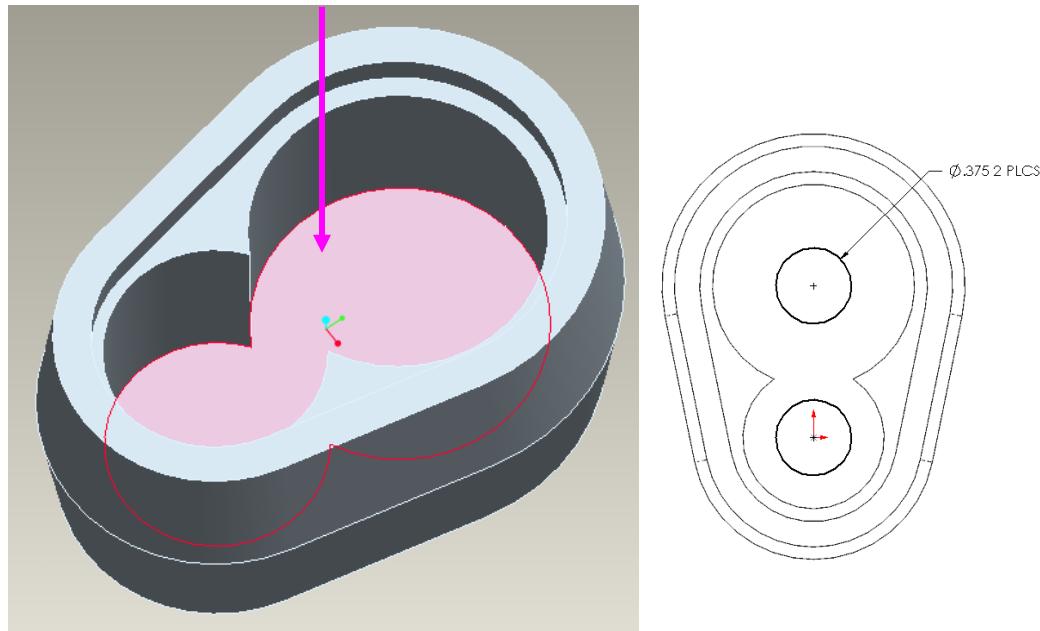


12. **DATUM PLANE OFFSET:** Select the Top datum plane, then select the Datum icon. Set to **-4 offset**.

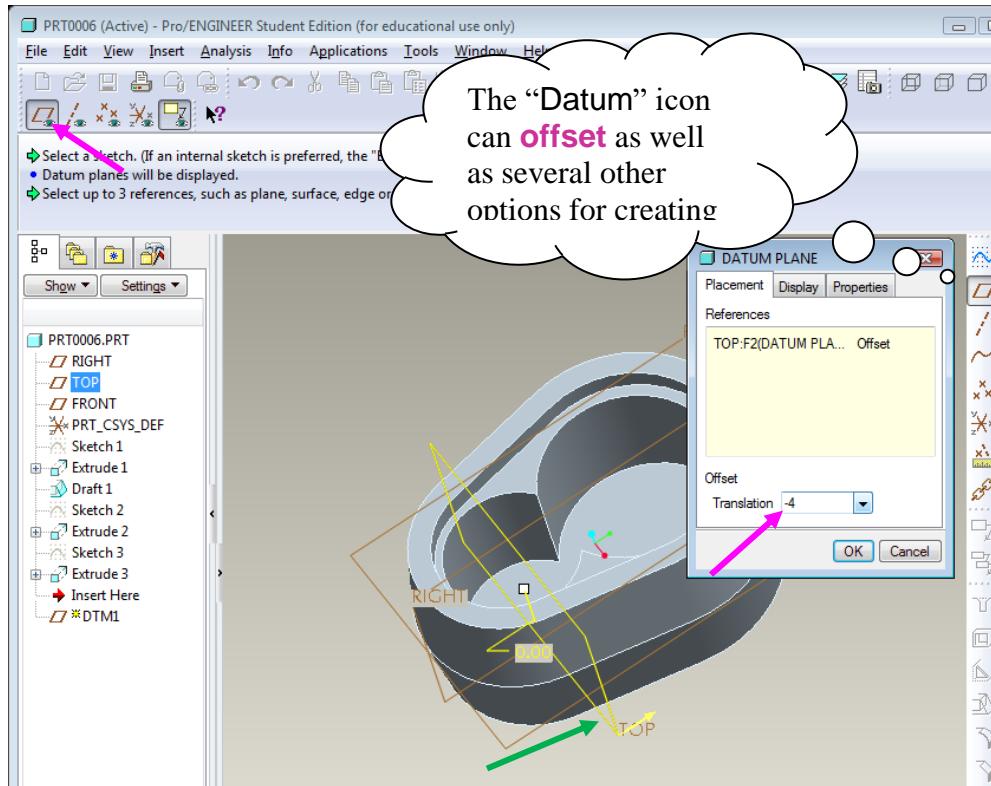



13. Start a sketch on “**DTM 1**” and draw a .5” dia. circle centered on the origin.

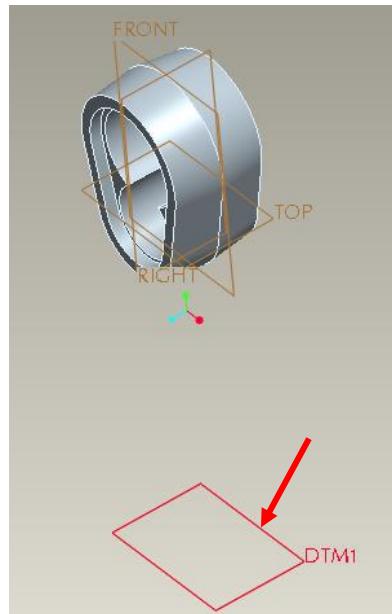


14. Extrude boss and use the “Up to next” option.

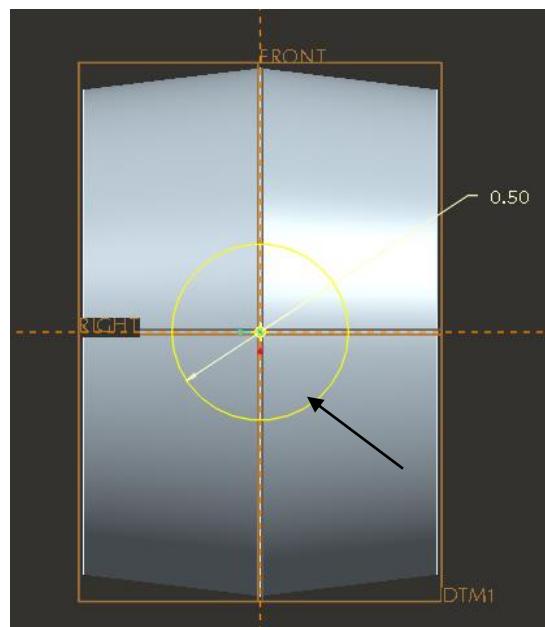


15. Select the circle and use the setting as shown in the illustration below.

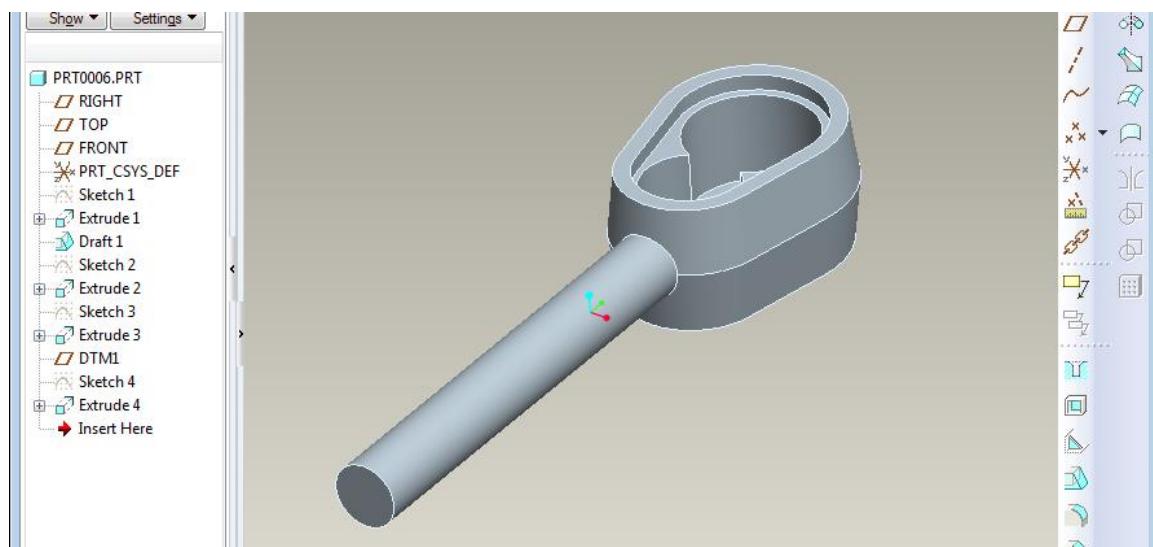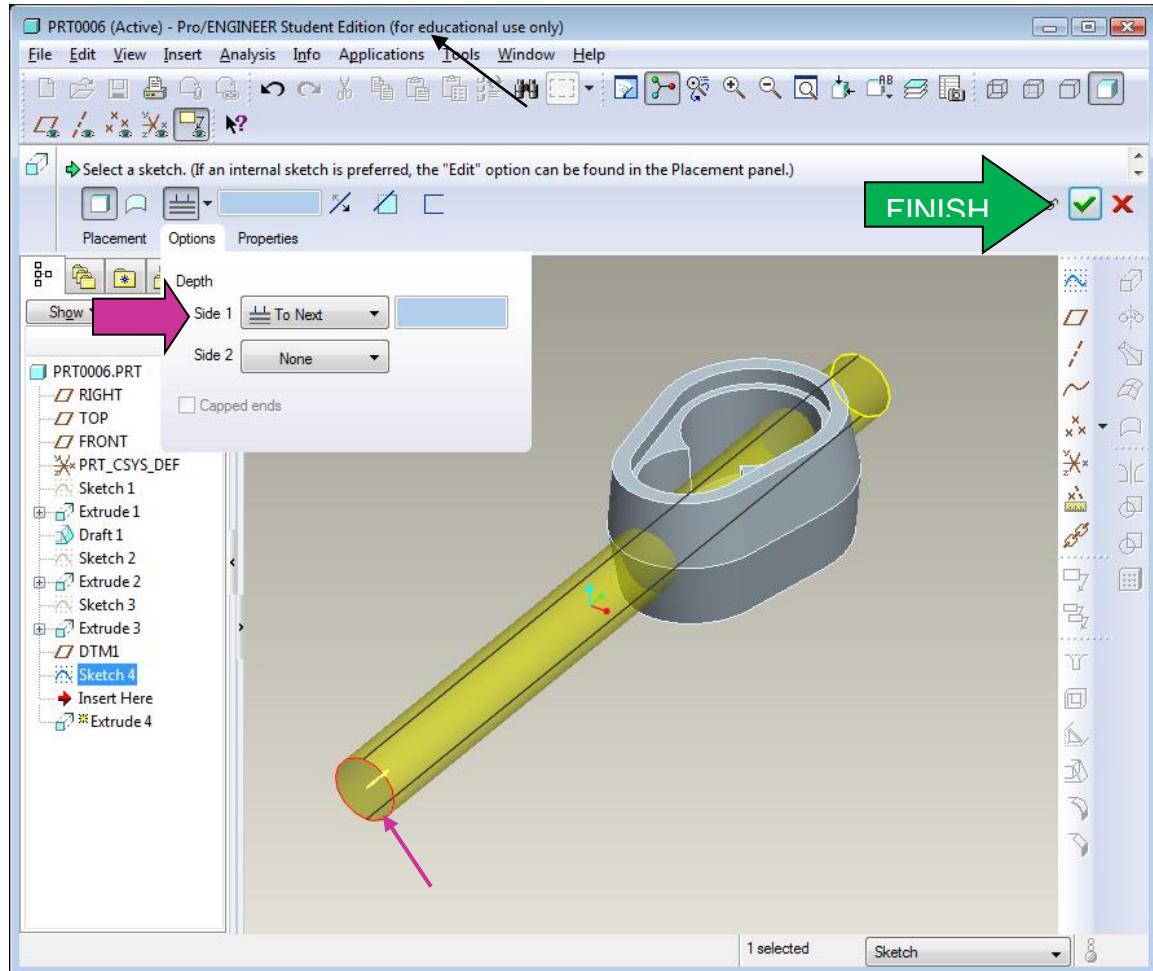


16. Start a sketch on the front datum plane and draw a rectangle with the following dimensions.

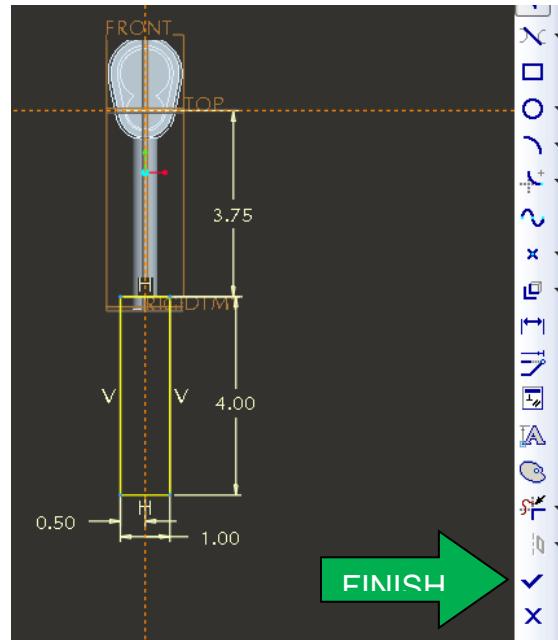


17. Extrude boss using the mid-plane option and .750 thick.

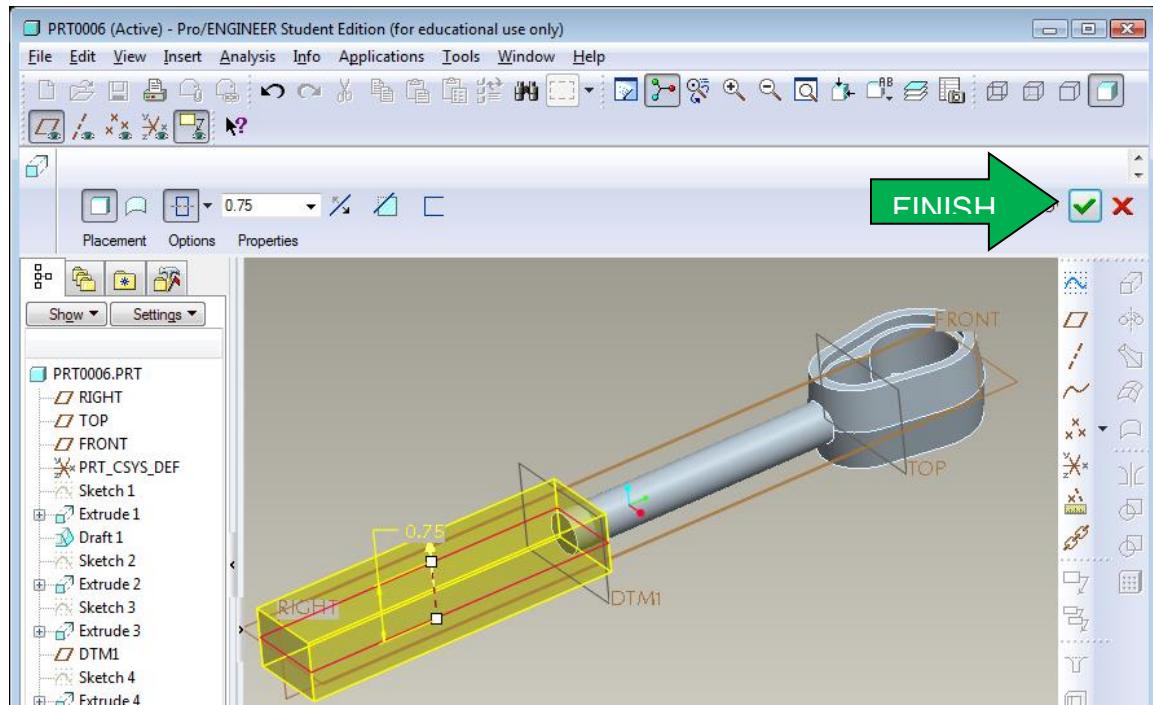


18. Using the **Draft** tool select the following faces and front plane and put 7° of draft on the side faces of the handle.

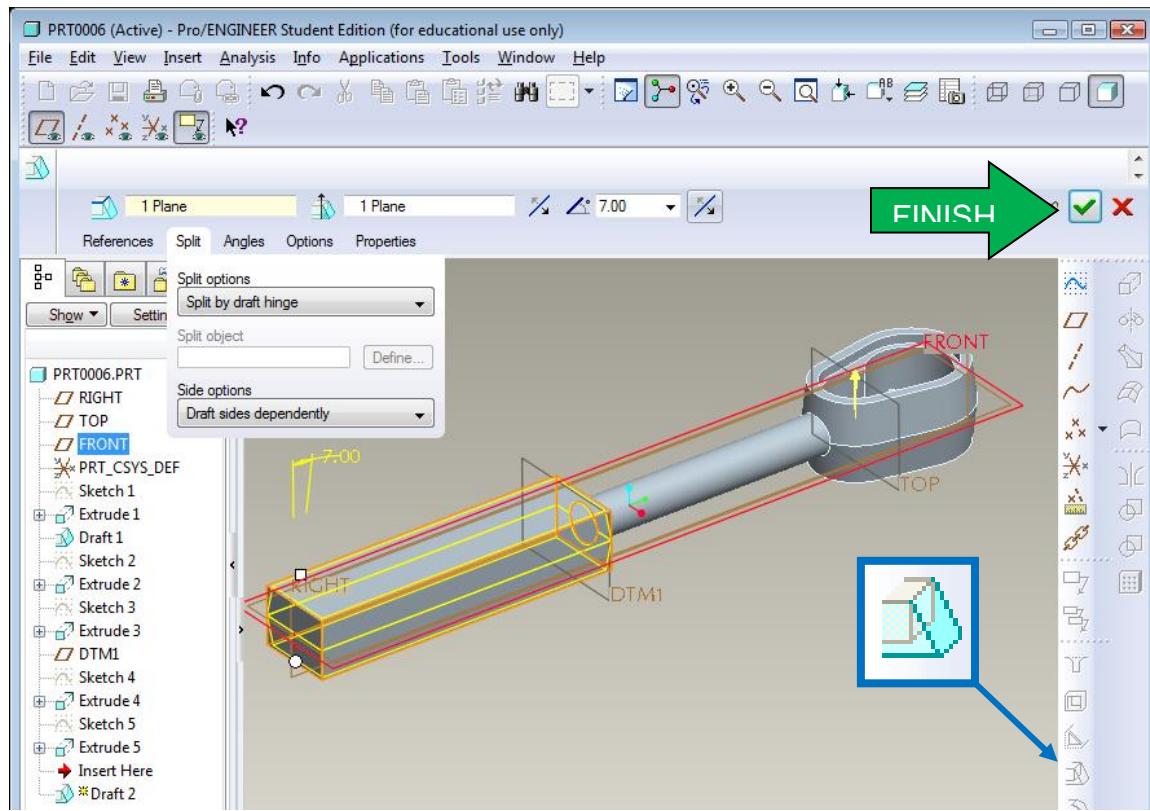


19. **Rounds:** Select the rounds/fillet icon, then select the edges as shown in the illustration below. Add .100".

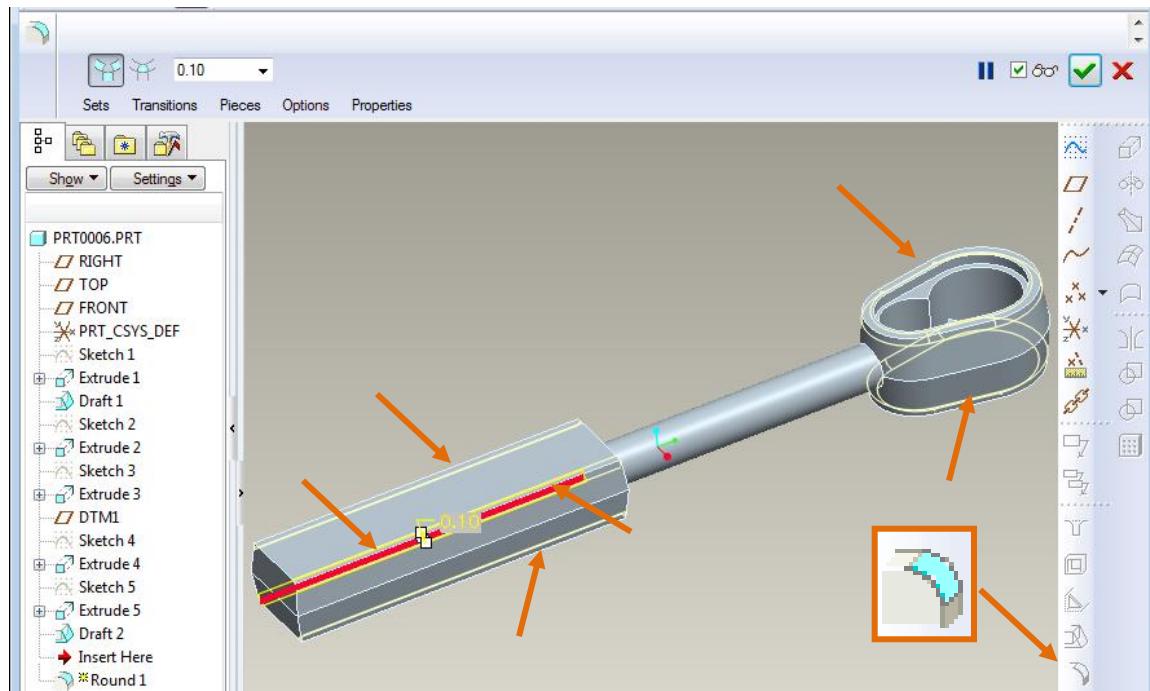


20. Add .060" Rounds to the following edges.

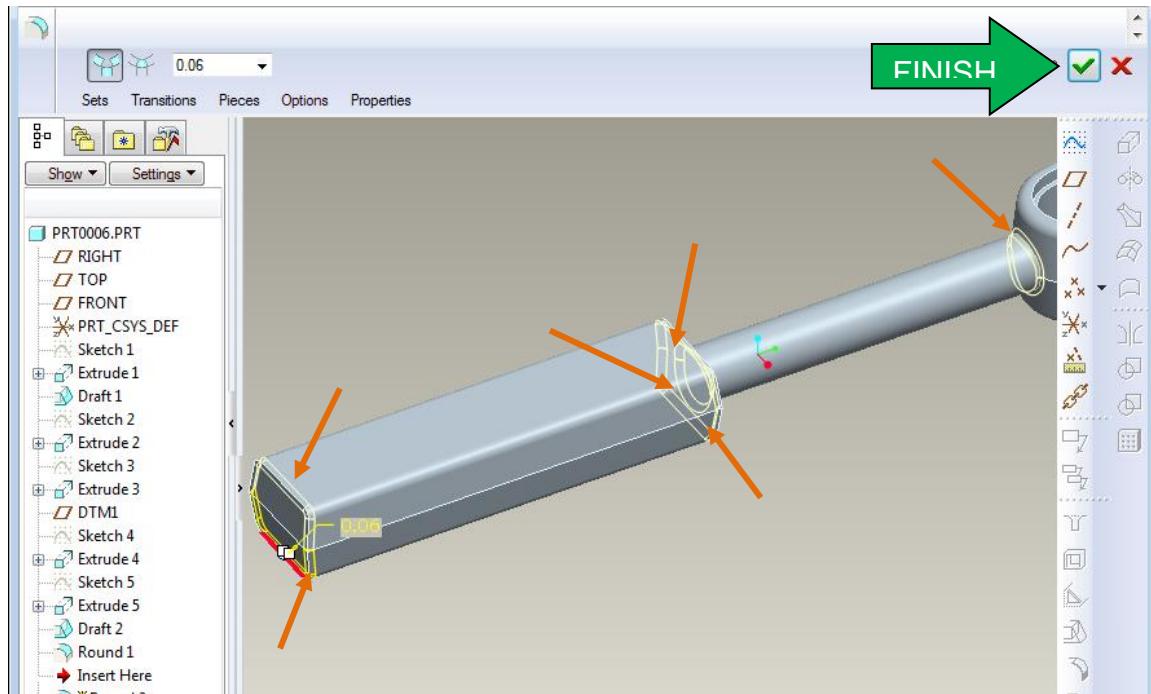


Finished

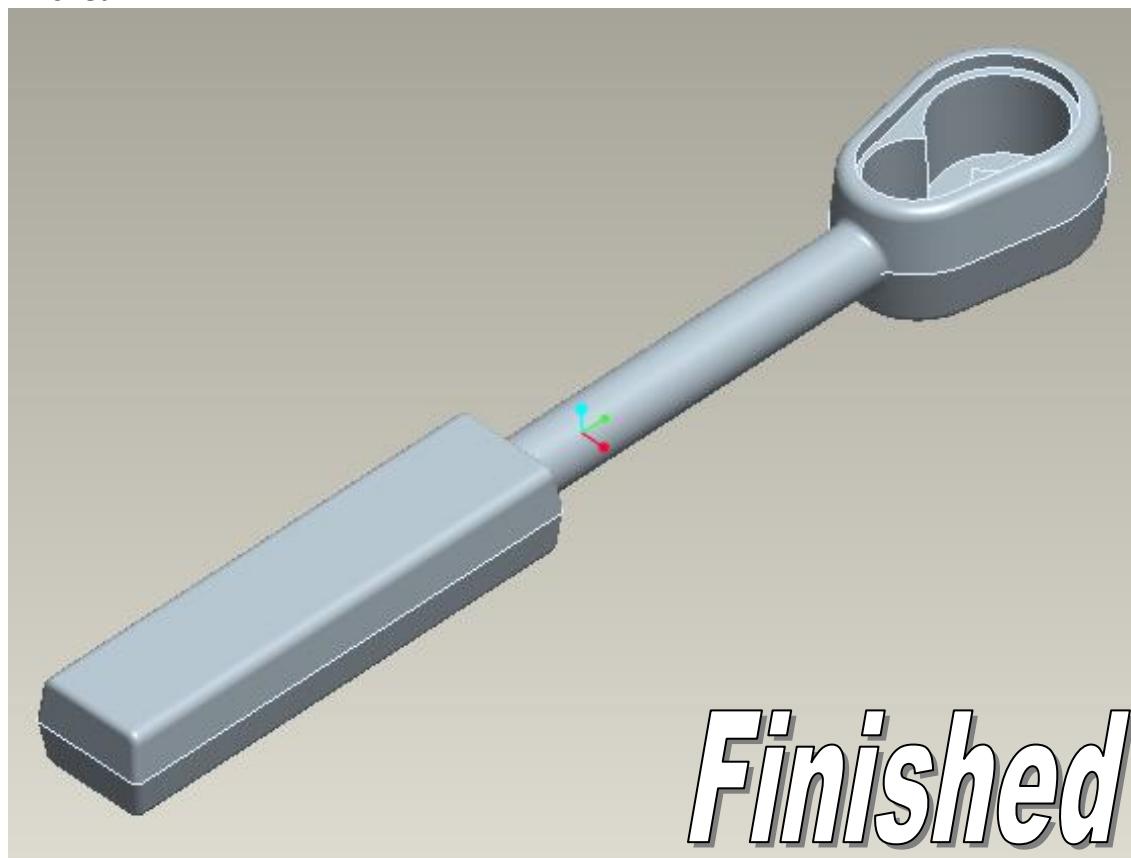

<p>PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.</p>			
<p>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL[±] ANGULAR: MACH⁺ BEND[±] TWO PLACE DECIMAL[±] THREE PLACE DECIMAL[±]</p> <p>INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL</p>			
<p>NEXT ASSY</p>		<p>USED ON</p>	
<p>FINISH</p>		<p>DO NOT SCALE DRAWING</p>	
		<p>SECTION A-A</p>	
<p>APPLICATION</p>		<p>SCALE: 1:2 WEIGHT: SHEET 1 OF 1</p>	
<p>4</p>		<p>3</p>	
<p>5</p>		<p>2</p>	

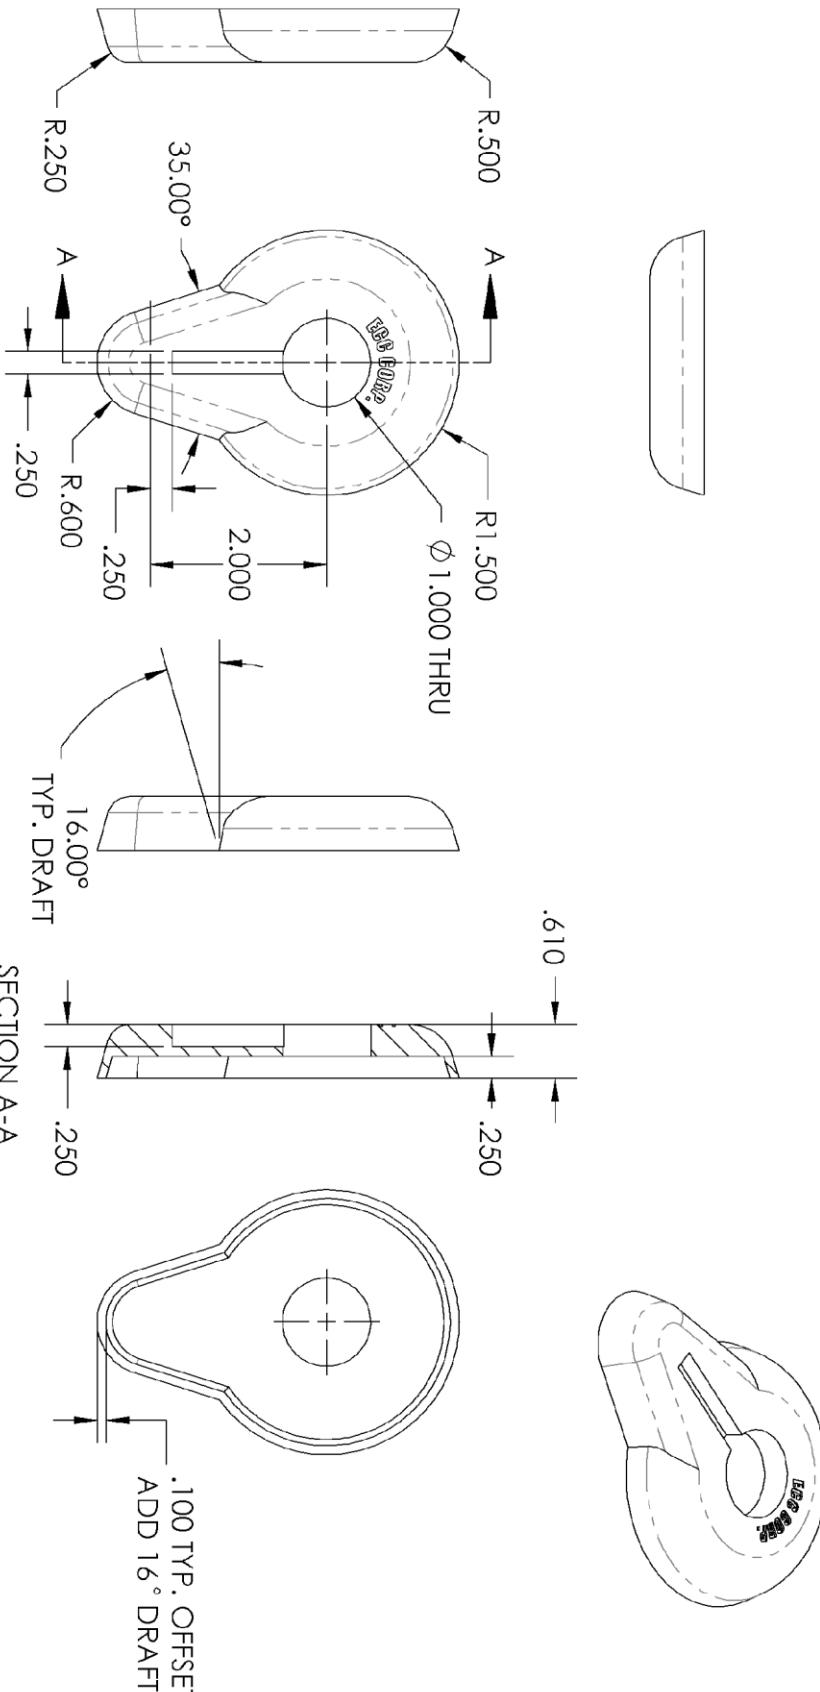

L3

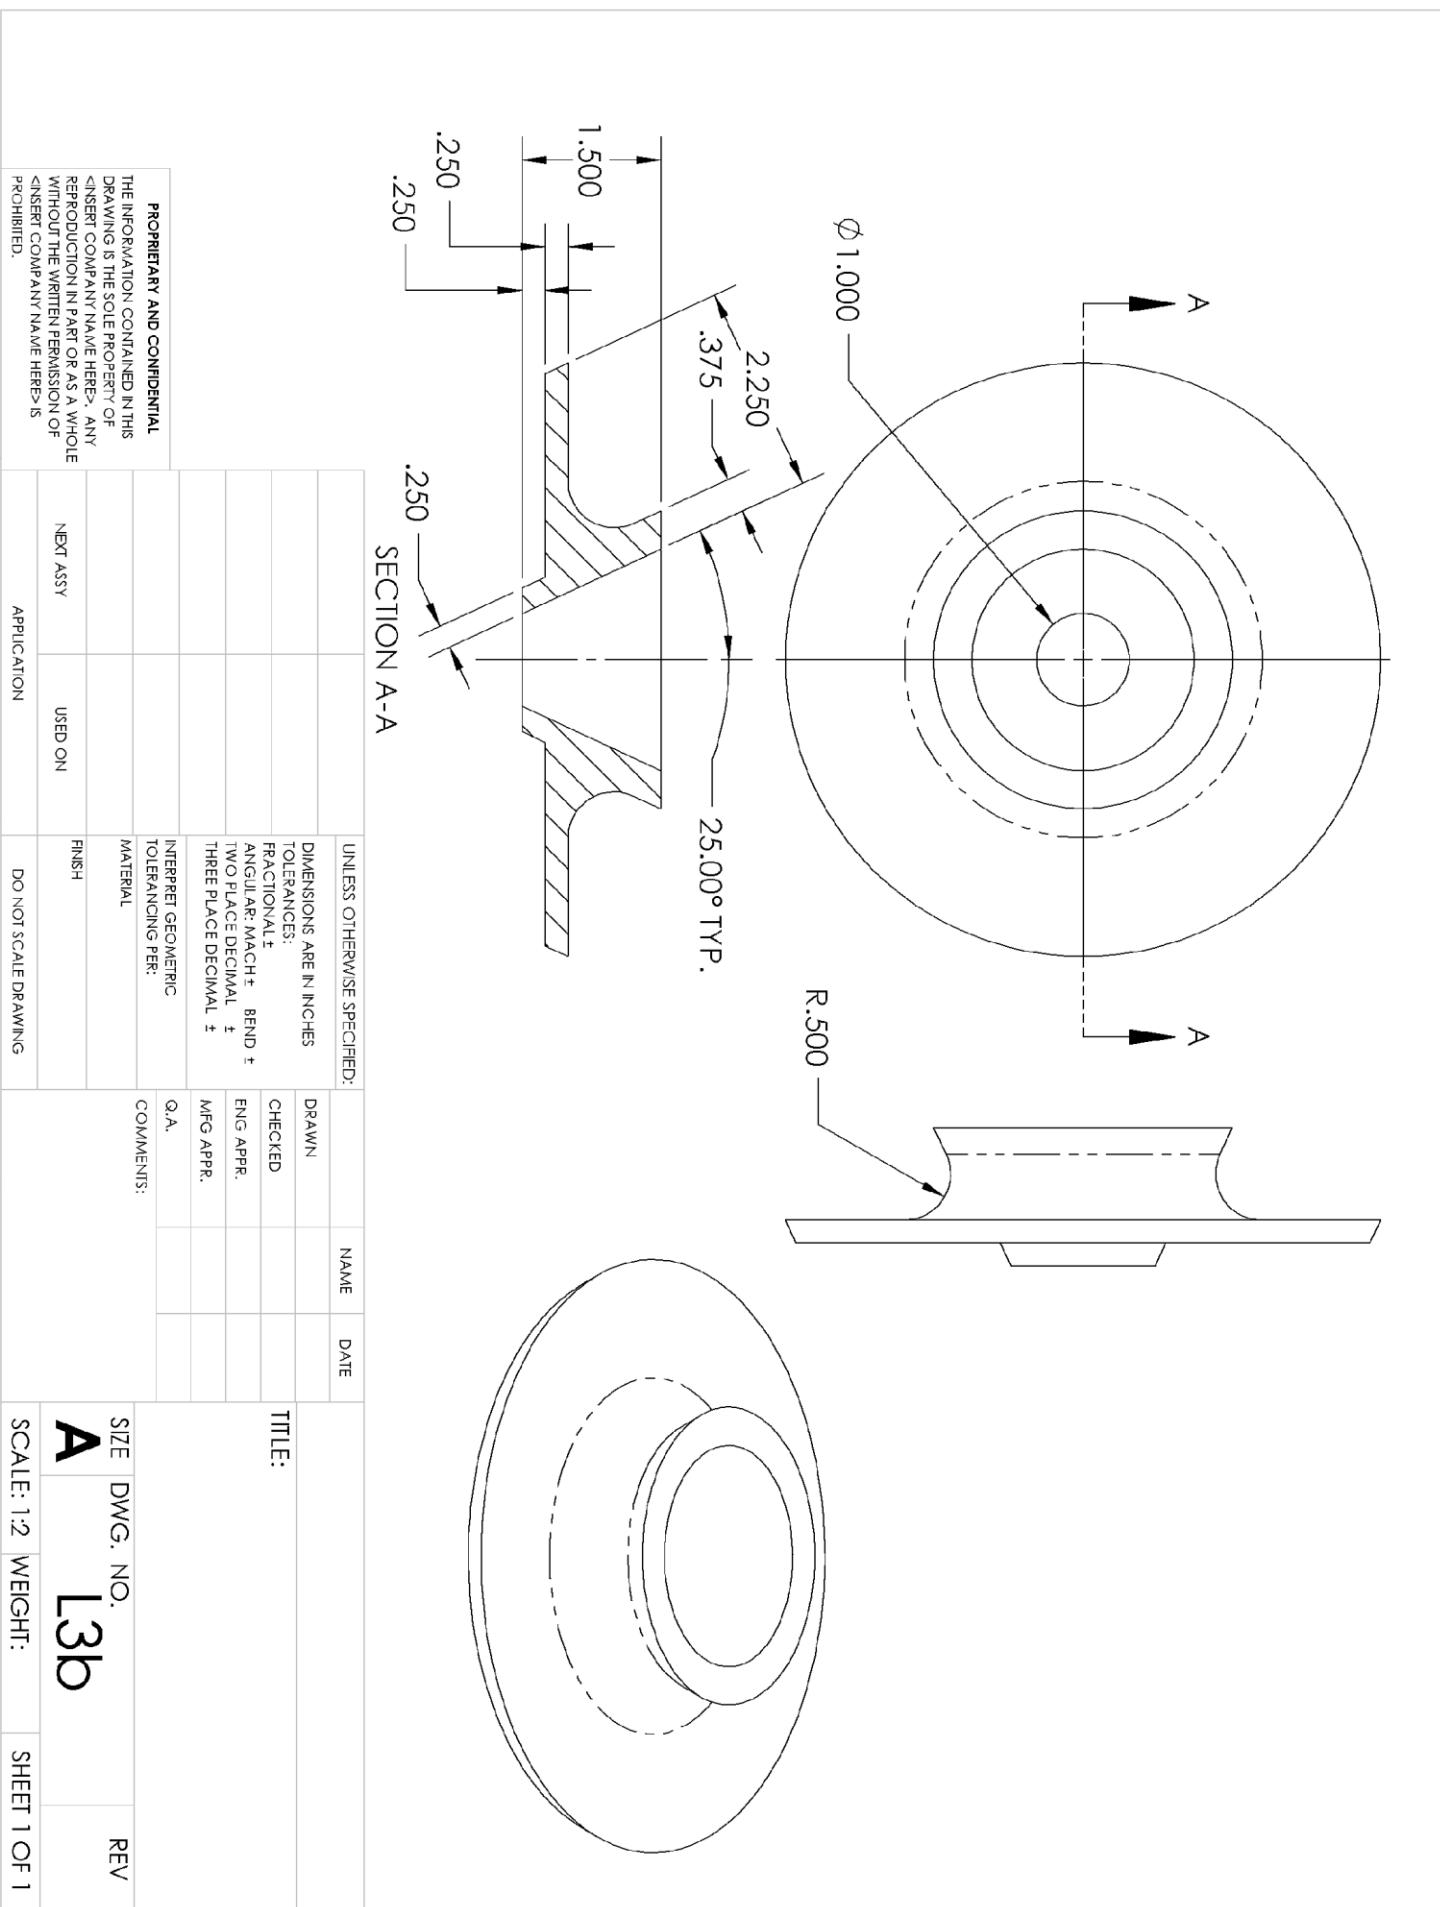


EXERCISE 4

Secondary Feature Modeling


- Sketch the geometry as show below on the “Front” plane. Then **Trim**.

GOALS:


- Sketch
- Chamfer
- Sweeps
- Circular Patterns
- Hole Wizard

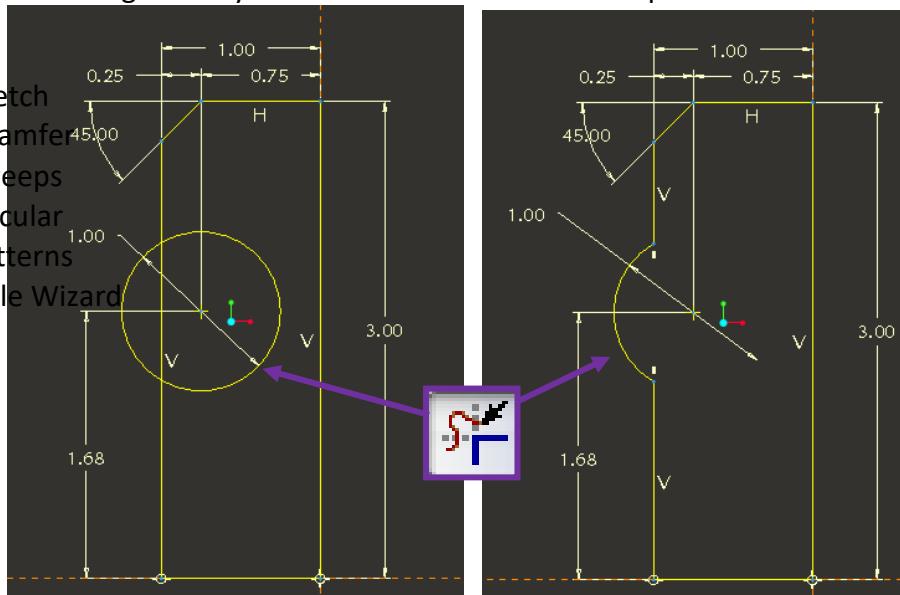

8. Revolve.

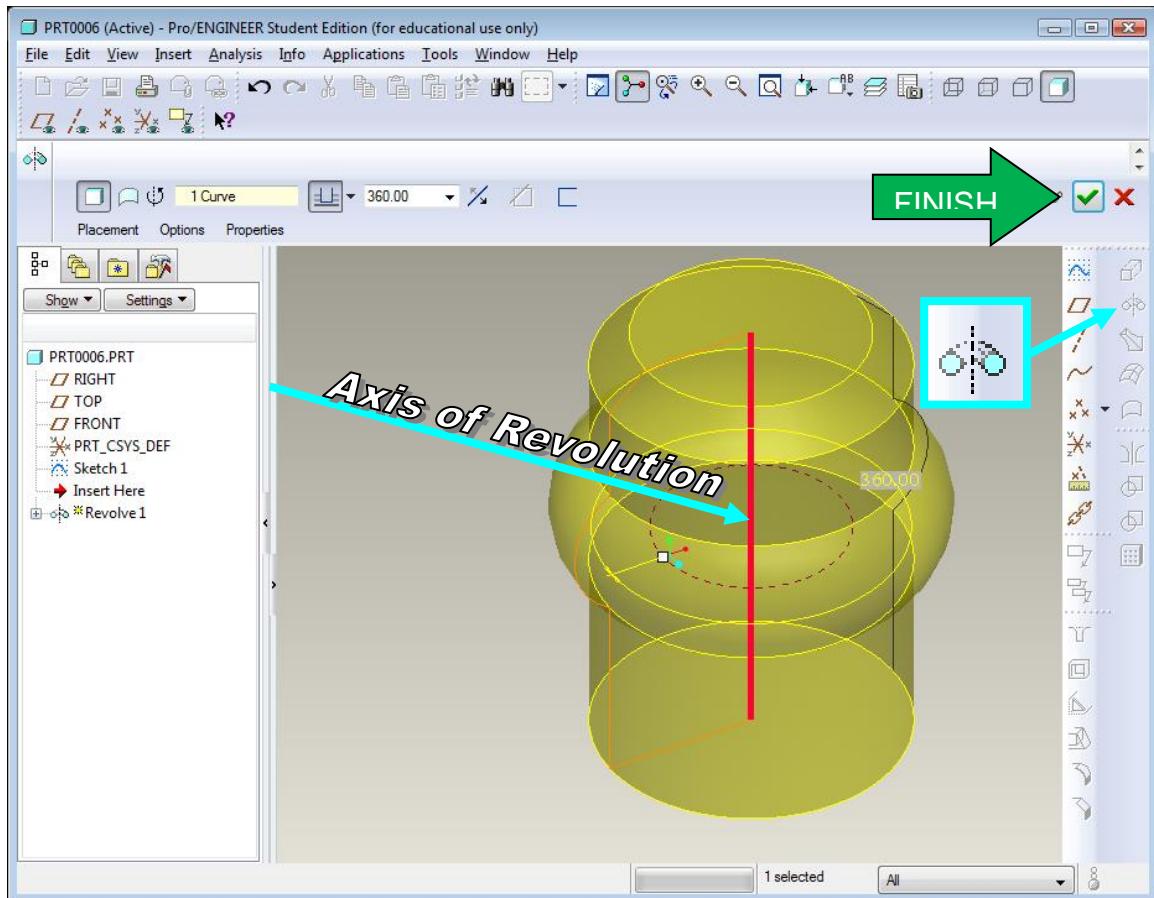


9. **Constraints:** Select the Front datum plane and sketch the following. Use the Constraint tool and select the **Tangent** option. Then select the left most horizontal line and the arc attached to it to establish a tangent relationship.

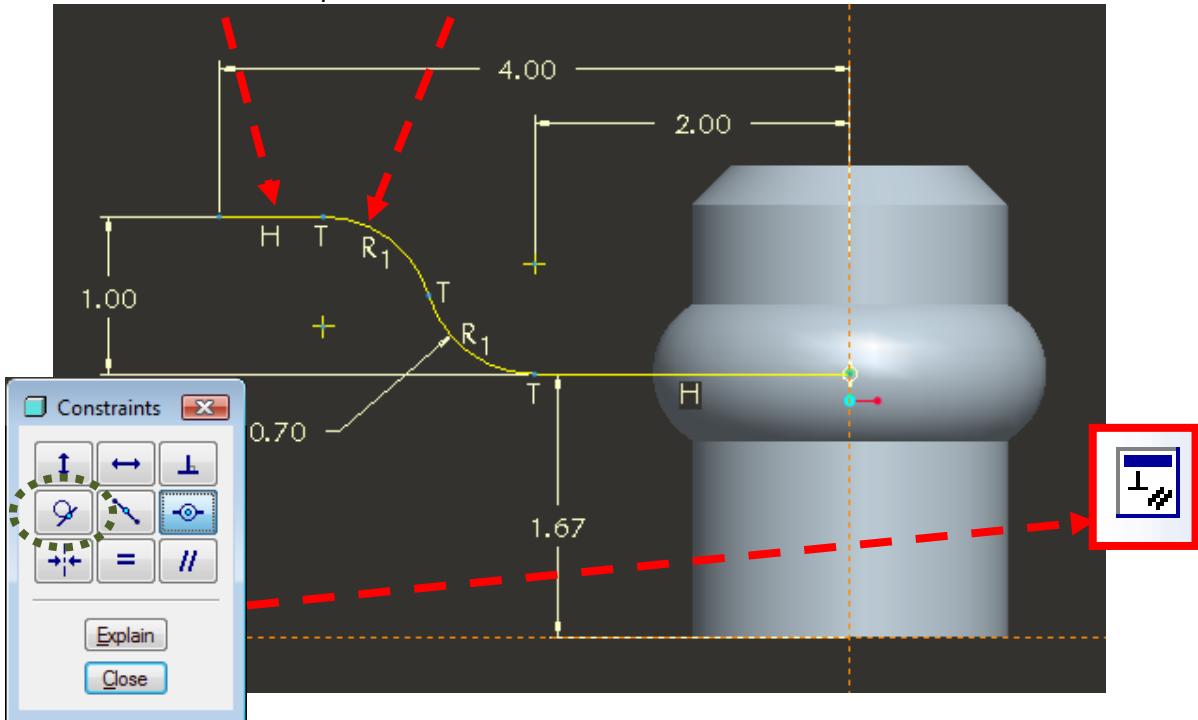


10. **Sweeps:** Use the pull-down menu “Insert/Sweep/Protrusion” Select the left side of the curve we just created to create a new sketch datum at the end.


11. Also select: “SelectTraj/Curve Chain>Select All/Done/Done”

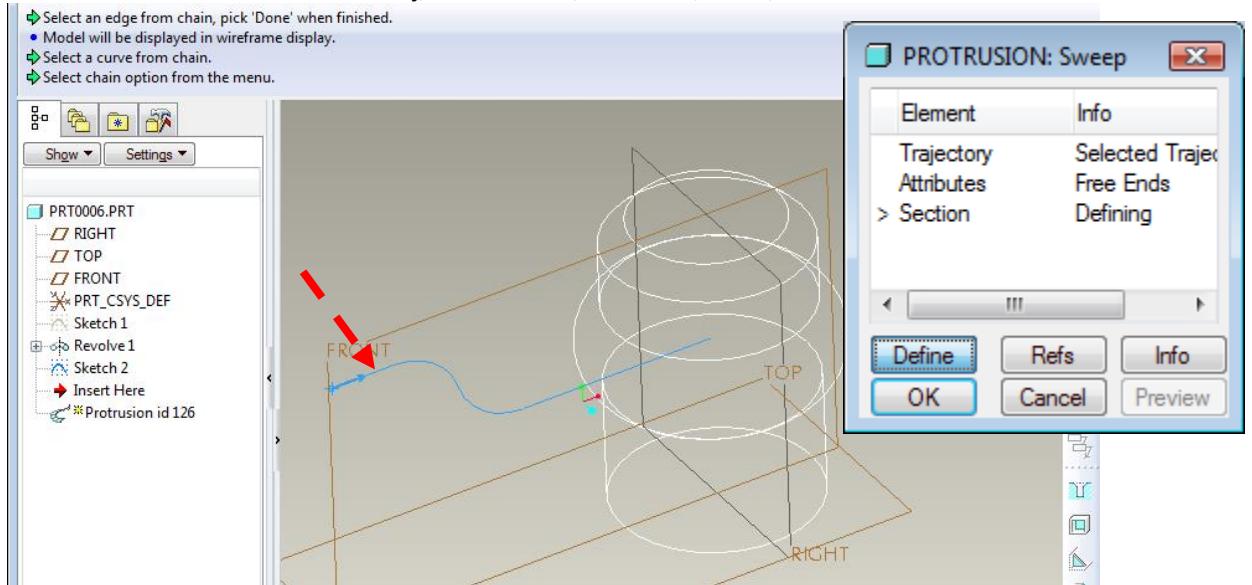



12. Draw the following sketch and select the “finish” option once complete.

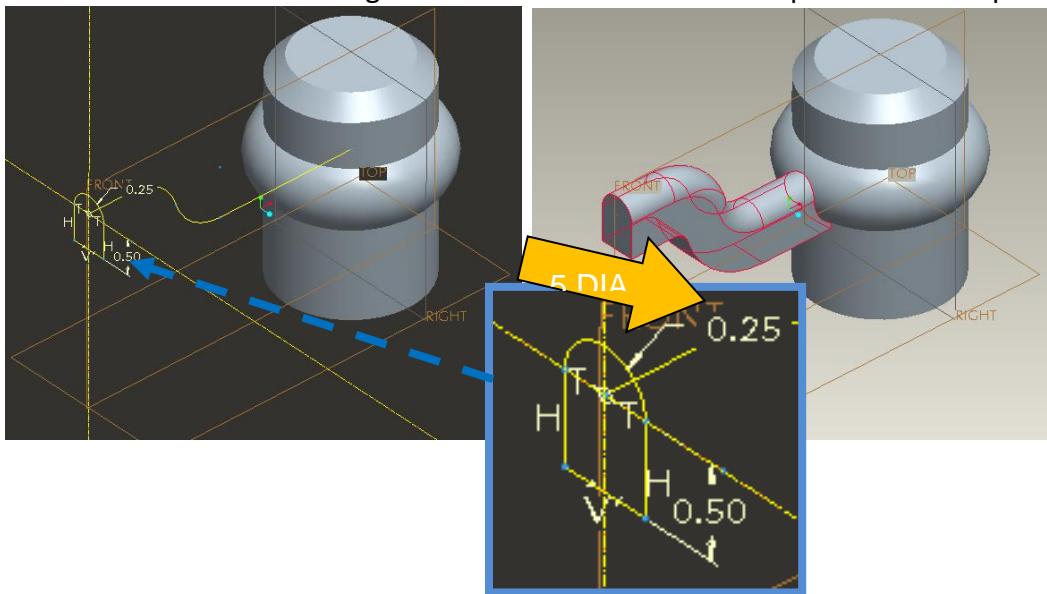


13. **Pattern Circular Pattern:** $360^\circ / 3 = 120^\circ$ (NOTE: First select the spoke to activate the icon.) Select “Axis” also select the “view axis”

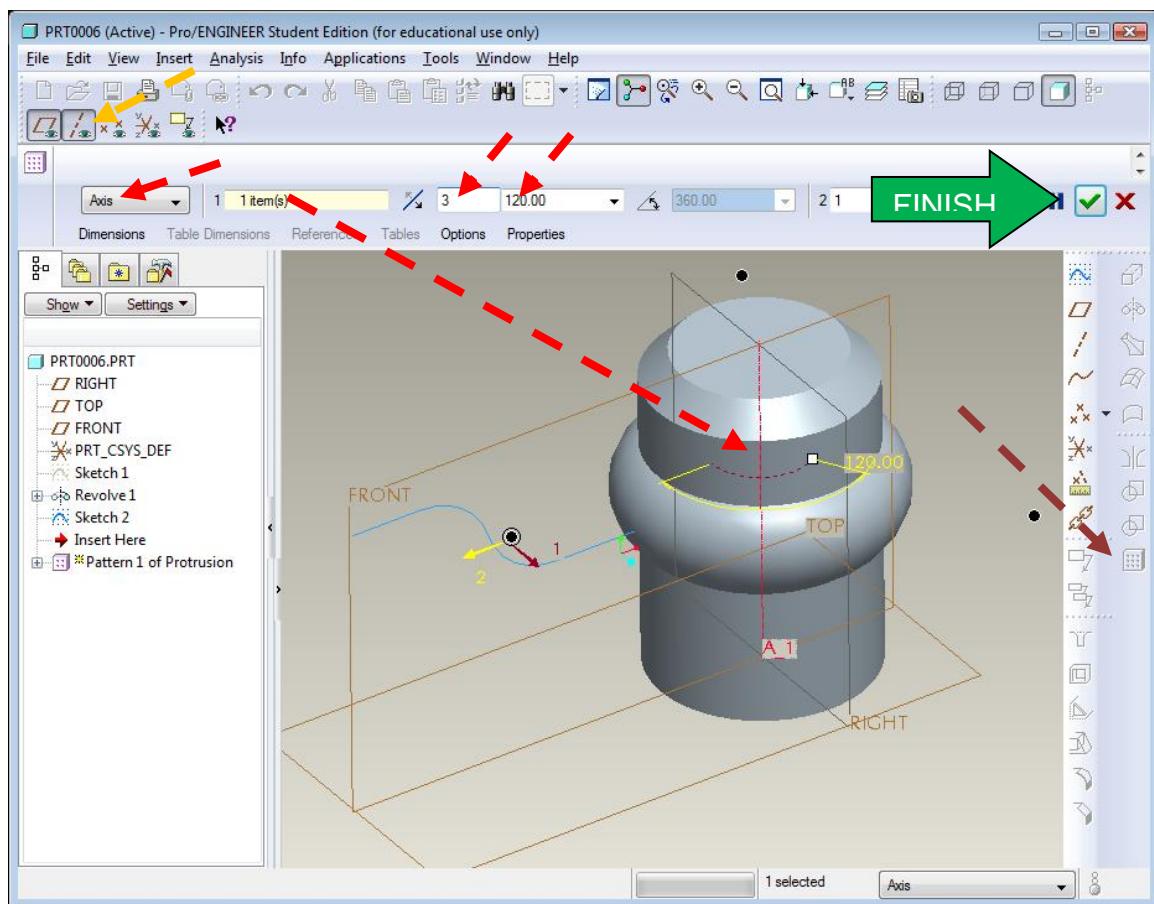


14. **Fillet all edges at .125"**

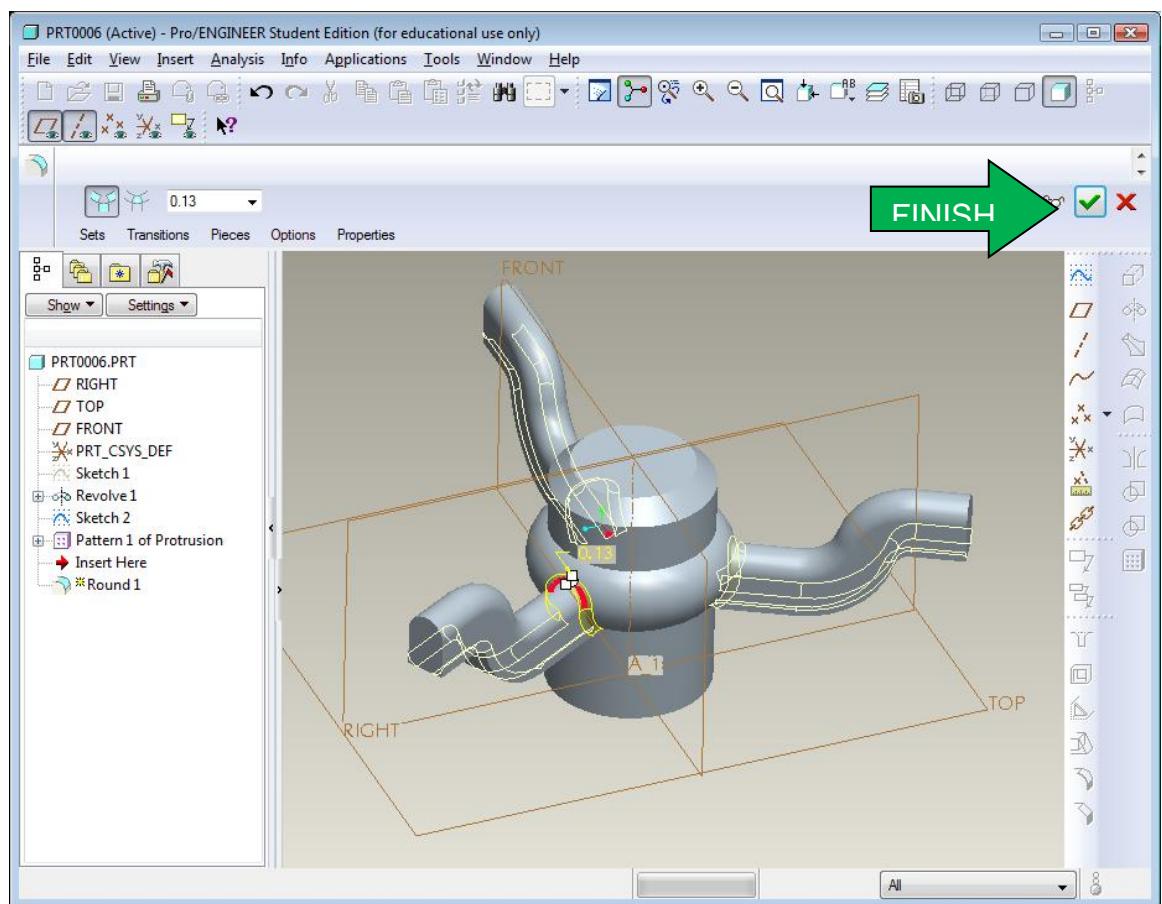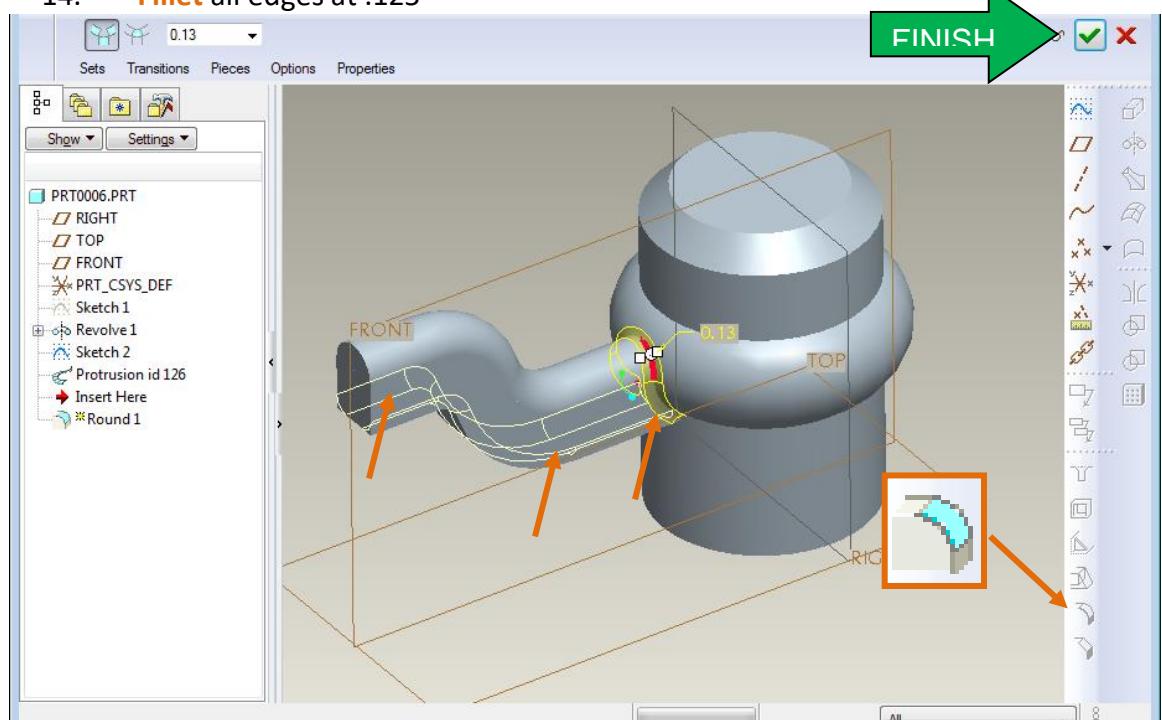


15. Select the “Front” plane and start a sketch on it. Rebuild after completion.

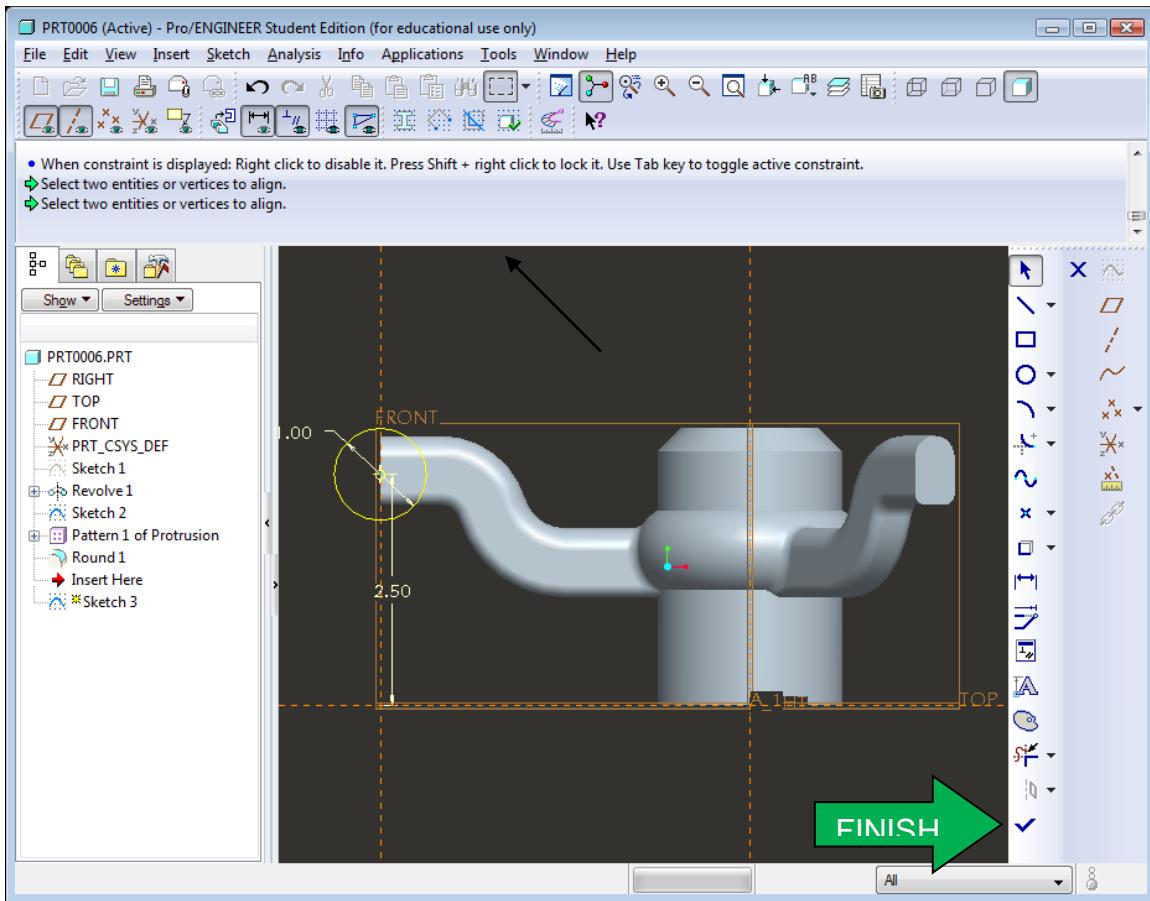


16. REVOLVE

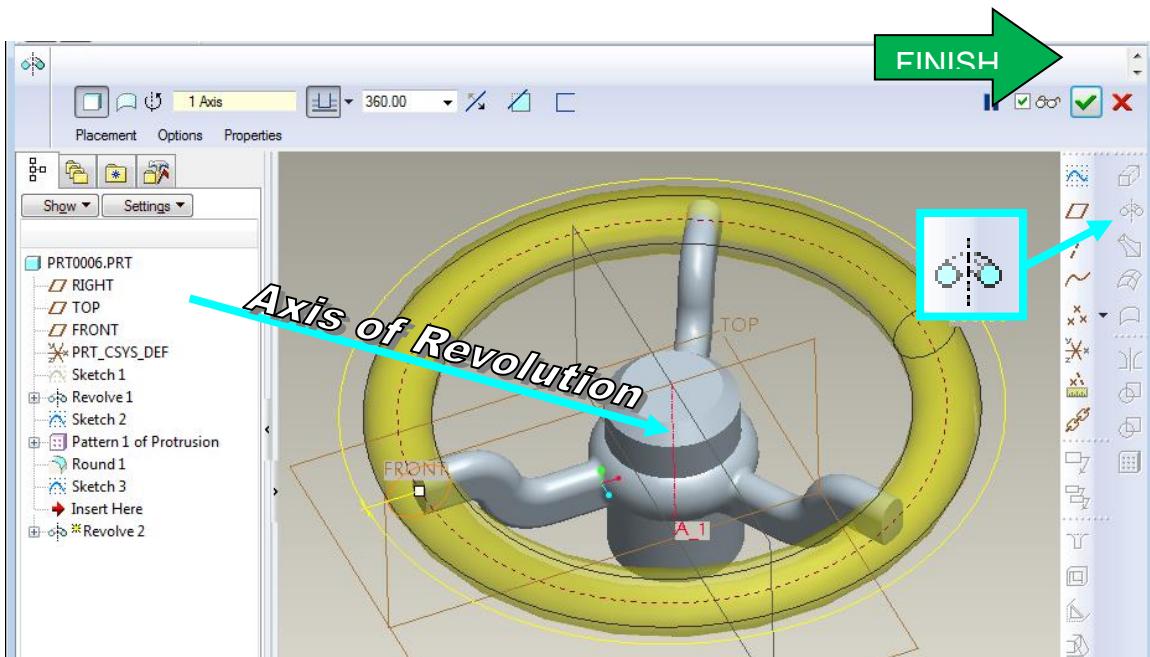

17. Add .250" Rounds to the spoke – handle sections.

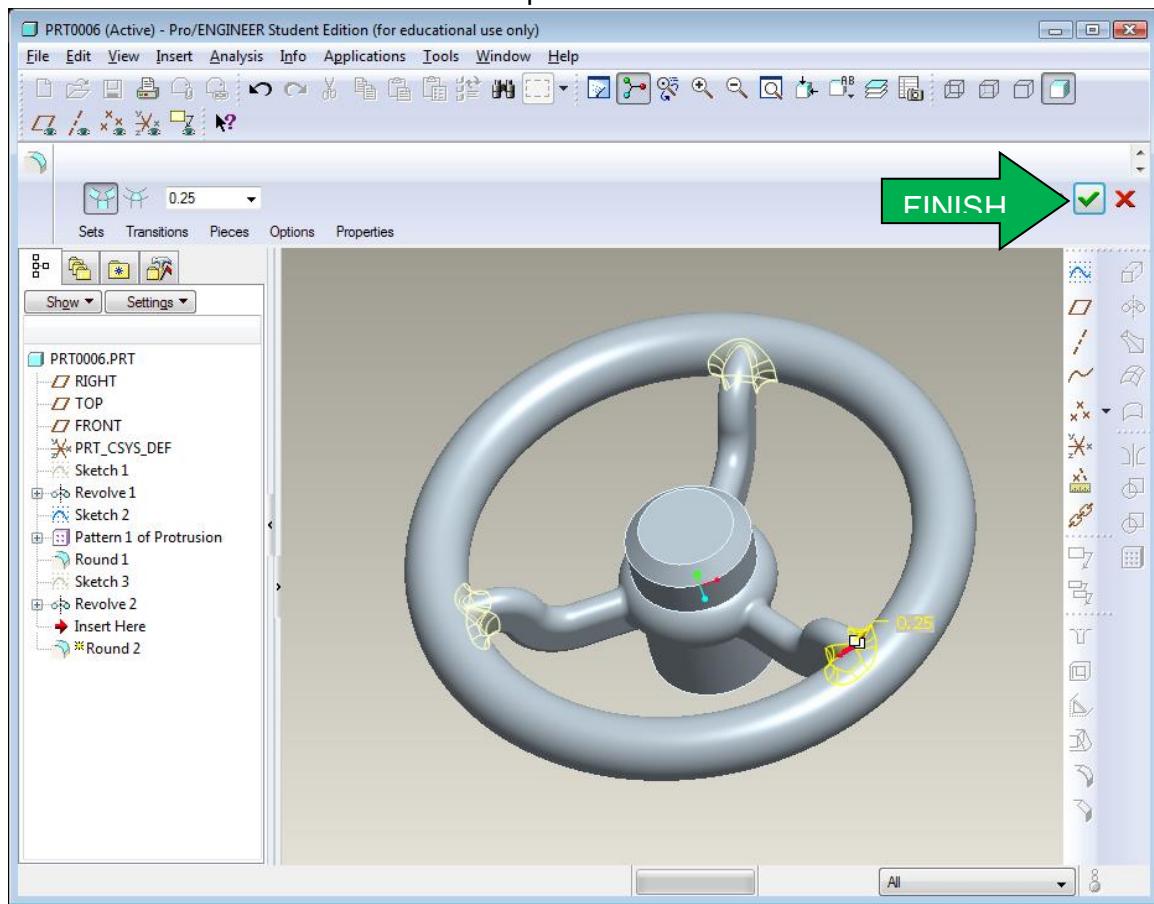



FINISHED

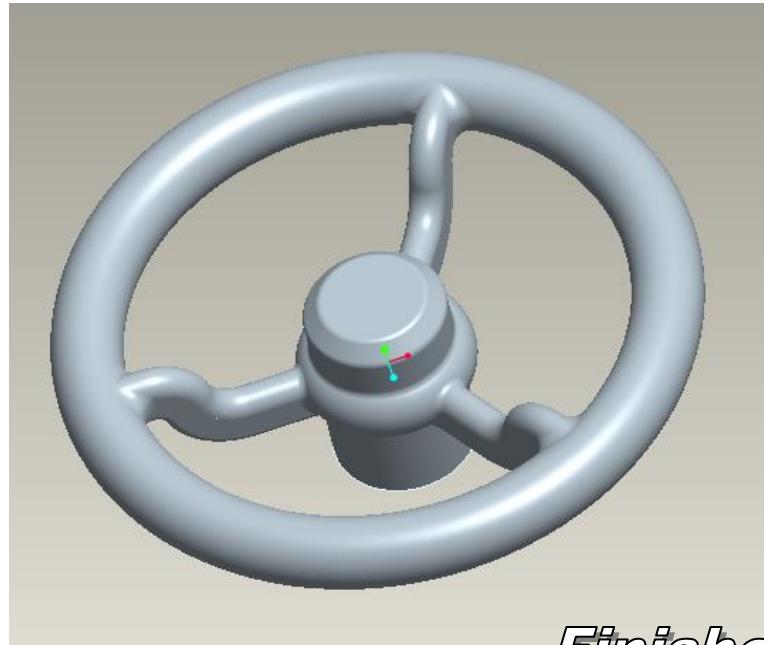

Finished

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.	
NEXT ASSY	APPLICATION
USED ON	DO NOT SCALE DRAWING
FINISH	

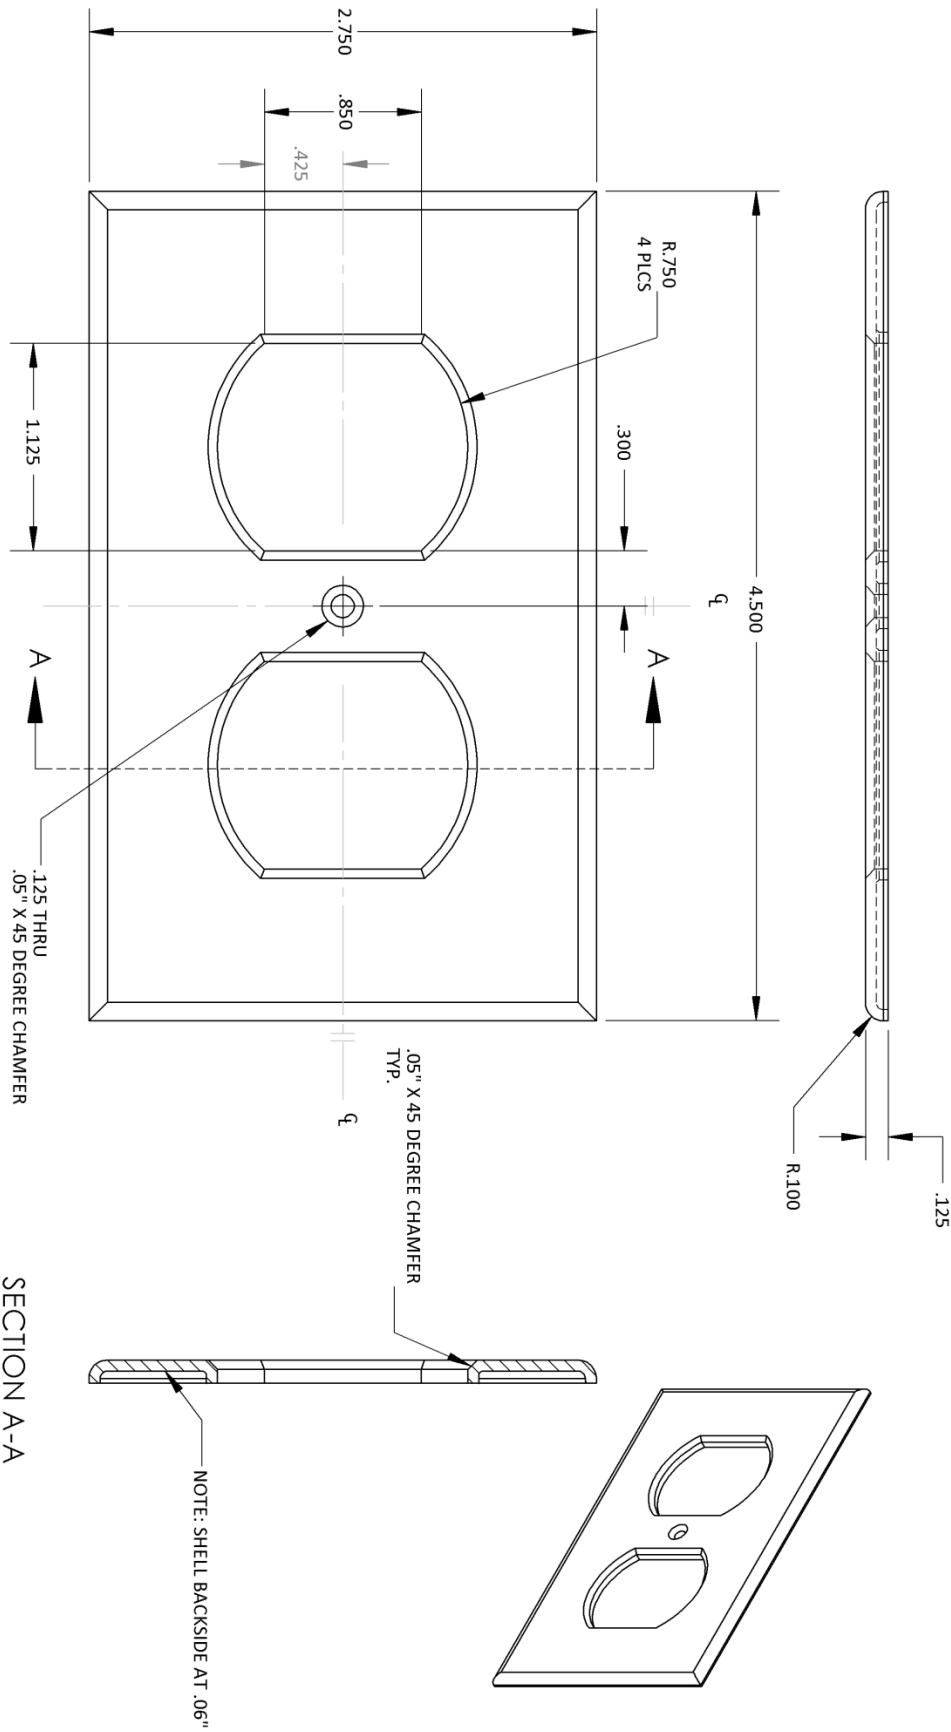


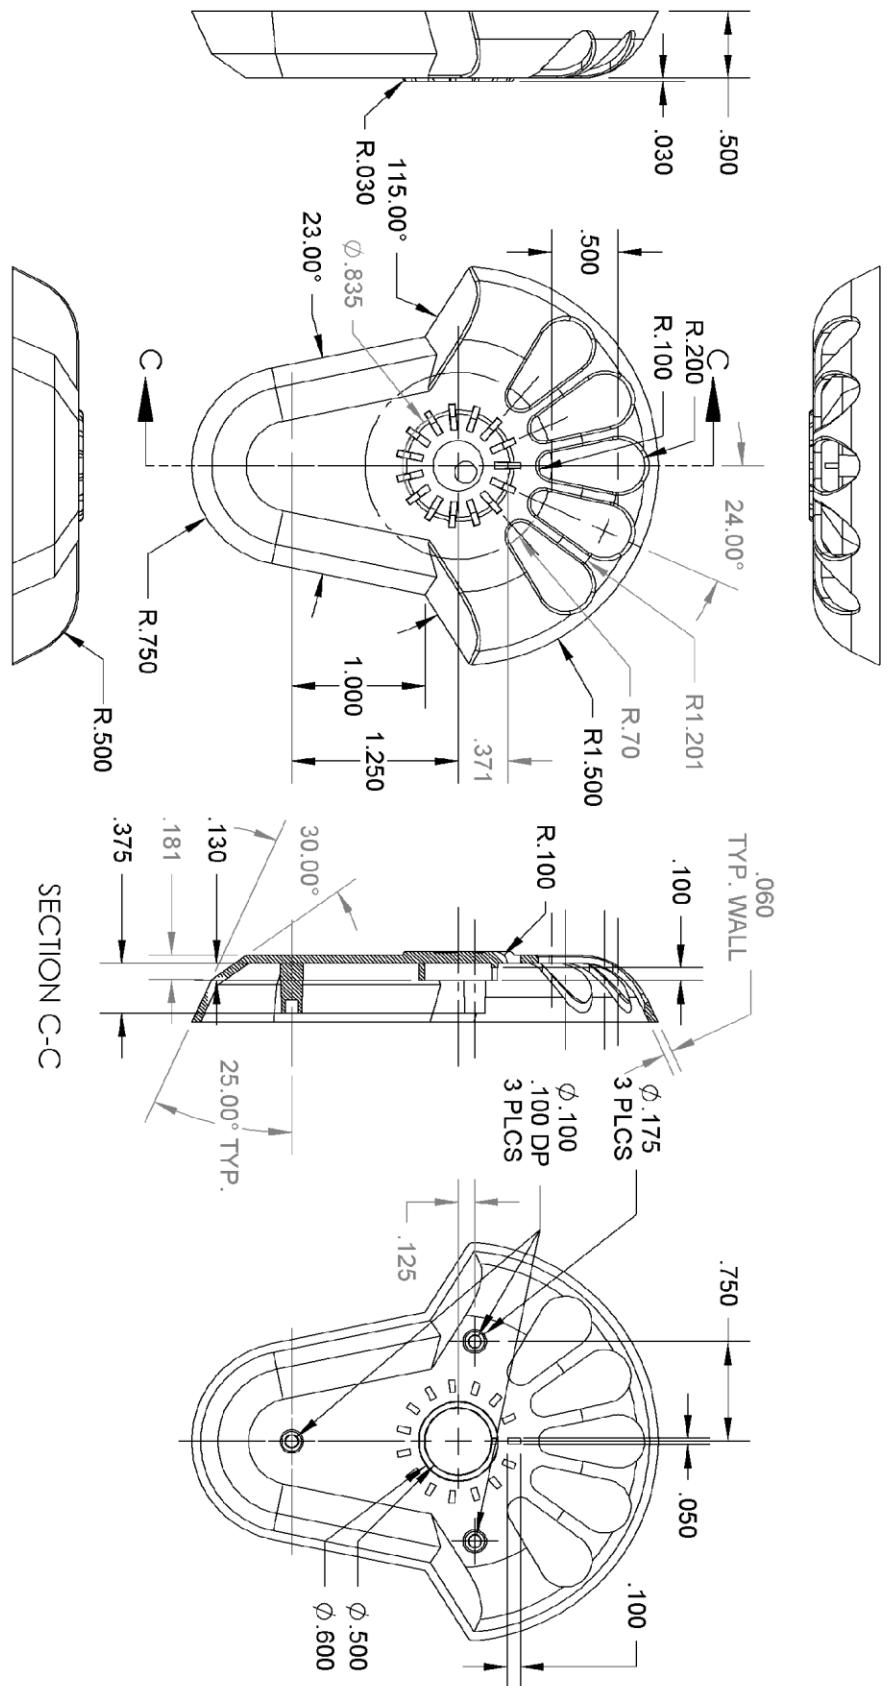


EXERCISE 5

Bottom-Up Assembly Creation


1. Go to “File/New and select the Assembly Template”.

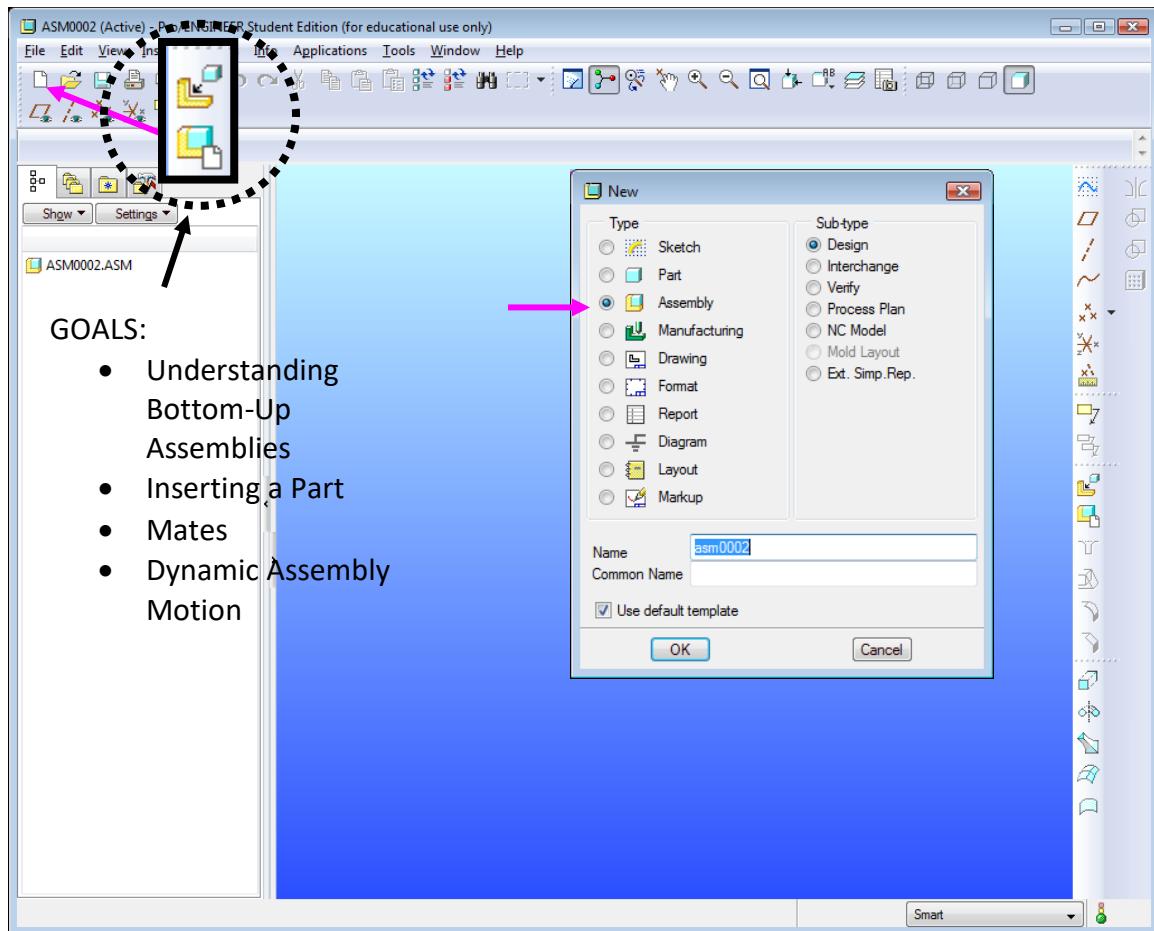


2. Assembly Tools.

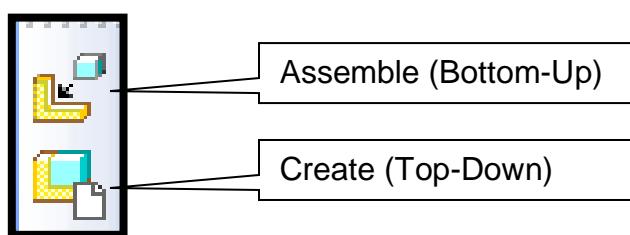

3. To insert a part into the assembly select the **Assemble** icon. Select the *Sheet_Metal_Bracket.prt*, and hit the “open” button at the bottom.

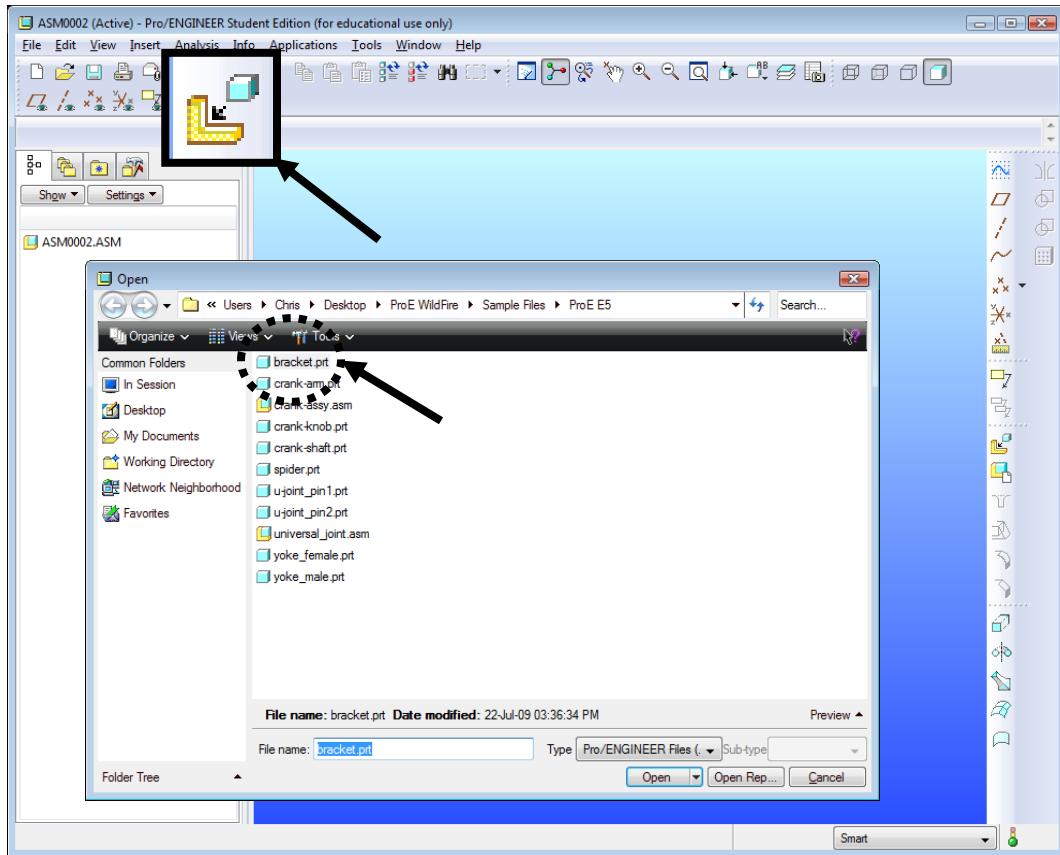


4. Select the **Automatic** pull down and select the **Default** option.

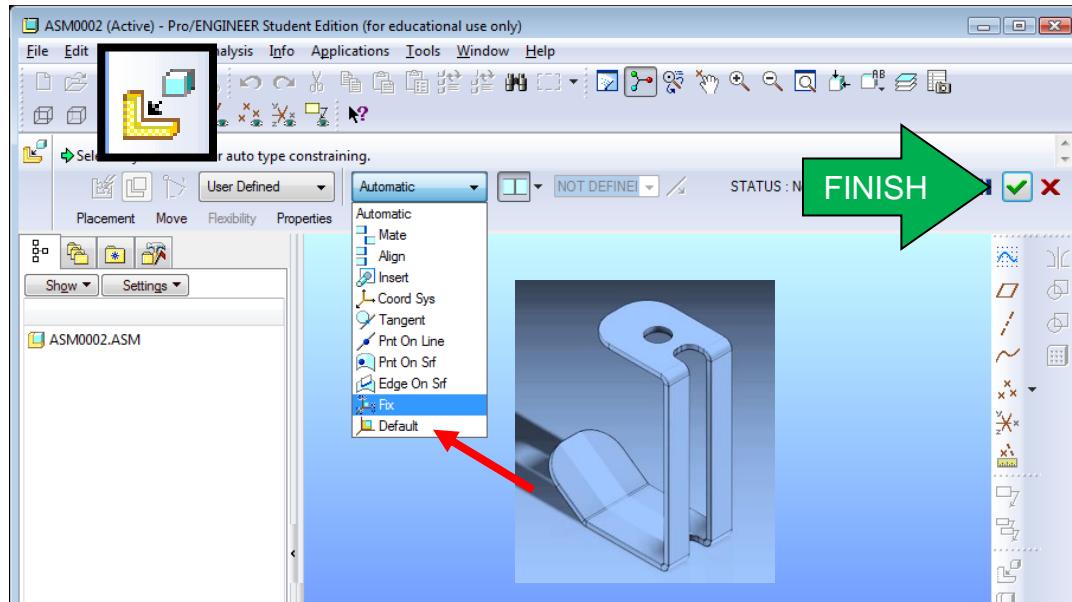


5. Select the Assemble icon and then insert the *yoke_male.prt*.


6. Select the radial surface of the **yoke_male** shaft and then select the surface of the hole on the **bracket**.

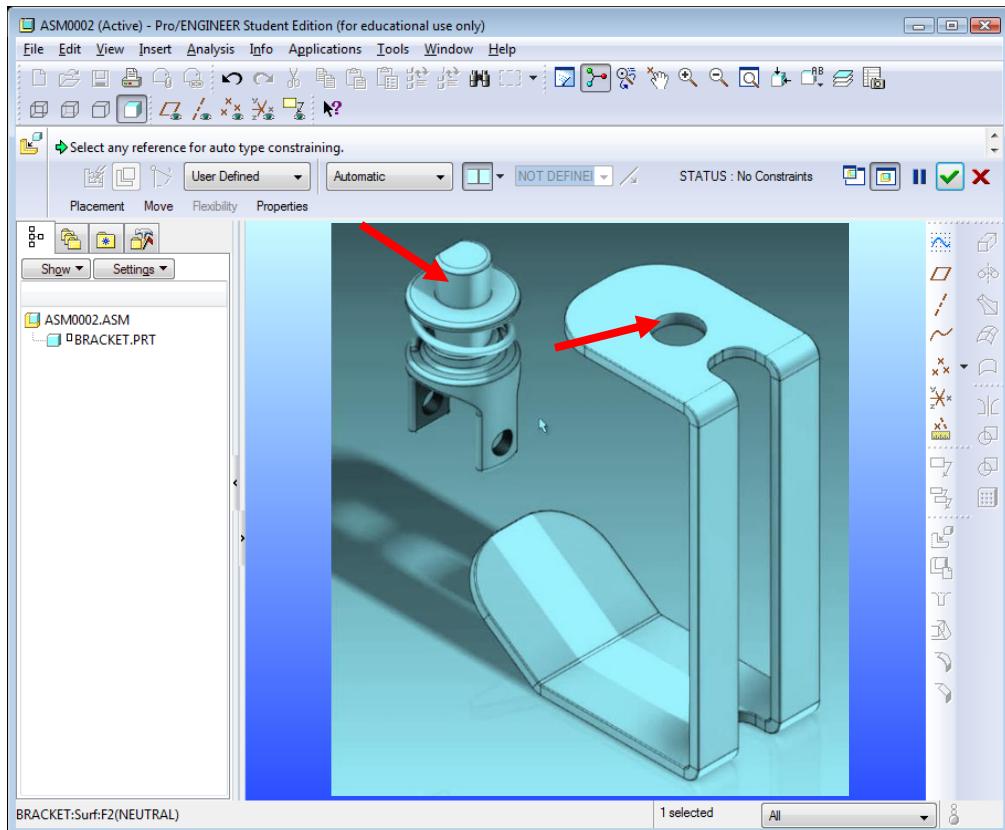


Notice the alignment that takes place.

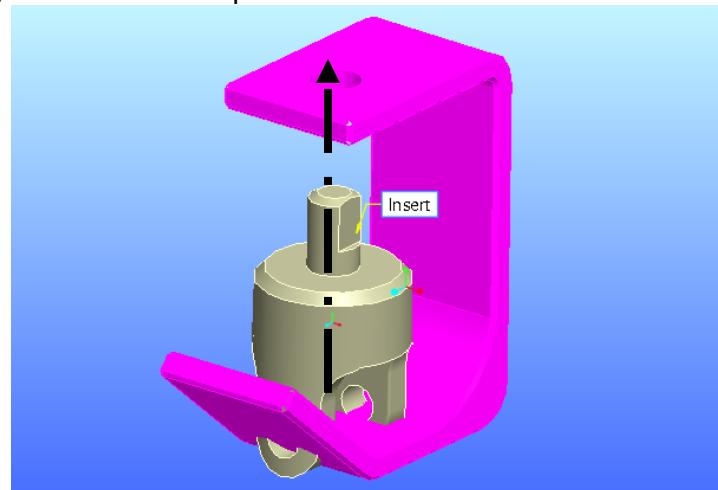


7. Select the **Placement** tab and then select **New Constraint** option. Then select the top surface of the **yoke_male**, and the underside face of the top flange of the **bracket**. Note: make sure you deselect the **Allow Assumptions** icon to enable dynamic assembly motion (it's located at the bottom of the Placement tab).

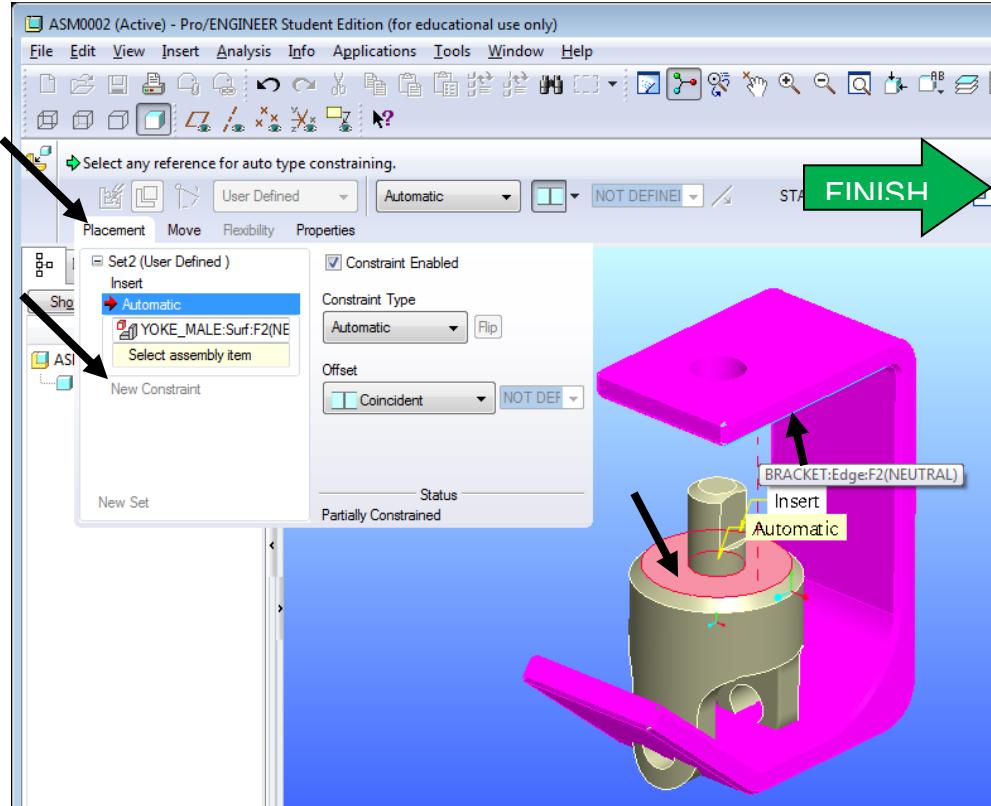


8. After applying the last constraint try moving the component using the **Drag Component** icon. Click on an edge of the yoke and drag with the left mouse button. It should spin in place only.

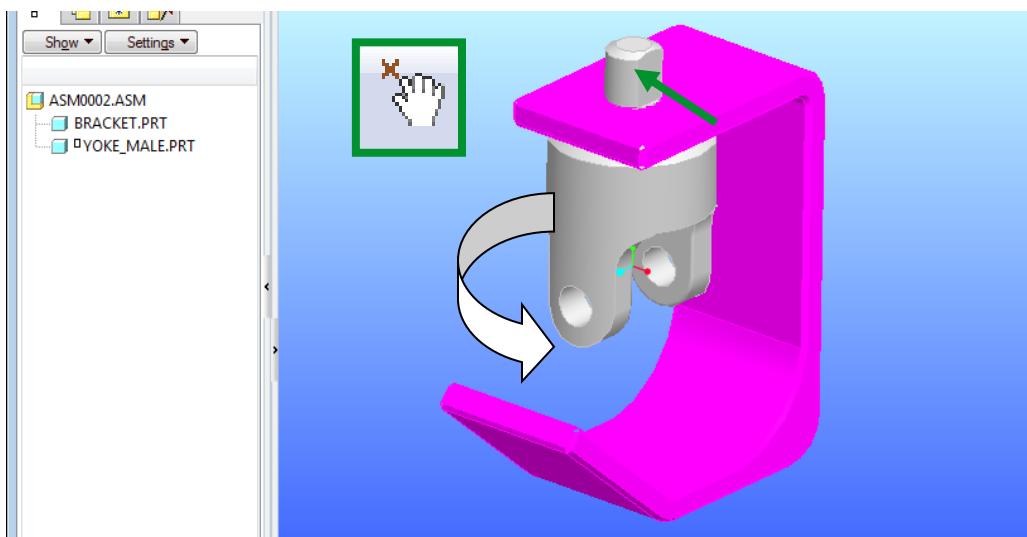


9. Insert the *spider.prt* and mate the cylindrical faces of the holes.

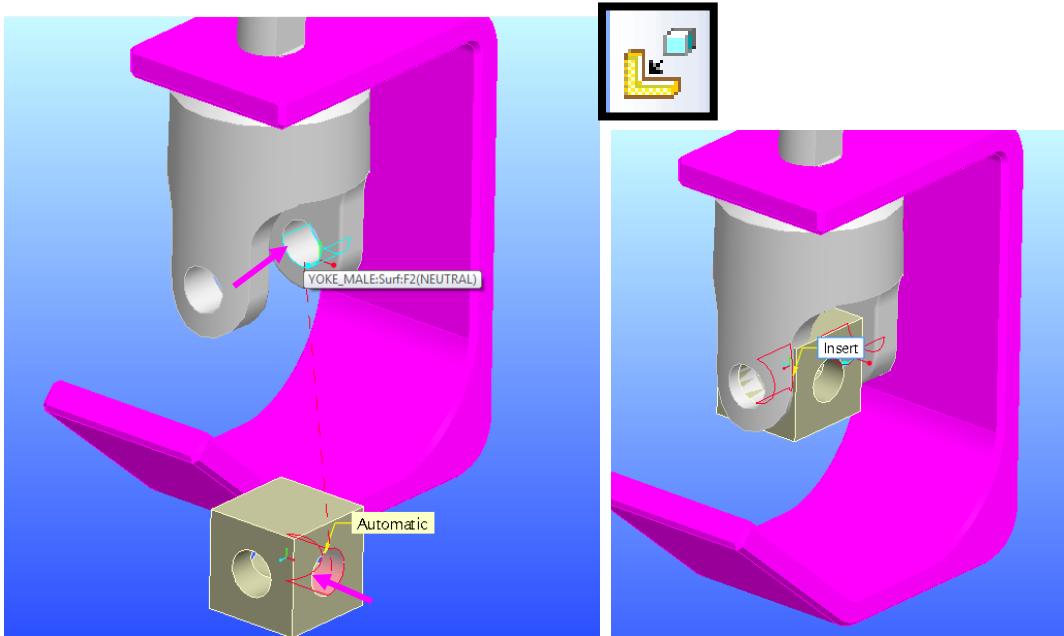


10. Select the side face of the *spider* and then the inside face of the *male_yoke* leg. You may need to rotate the assembly to see the correct faces. You may need to *Regenerate* after applying the last mate.

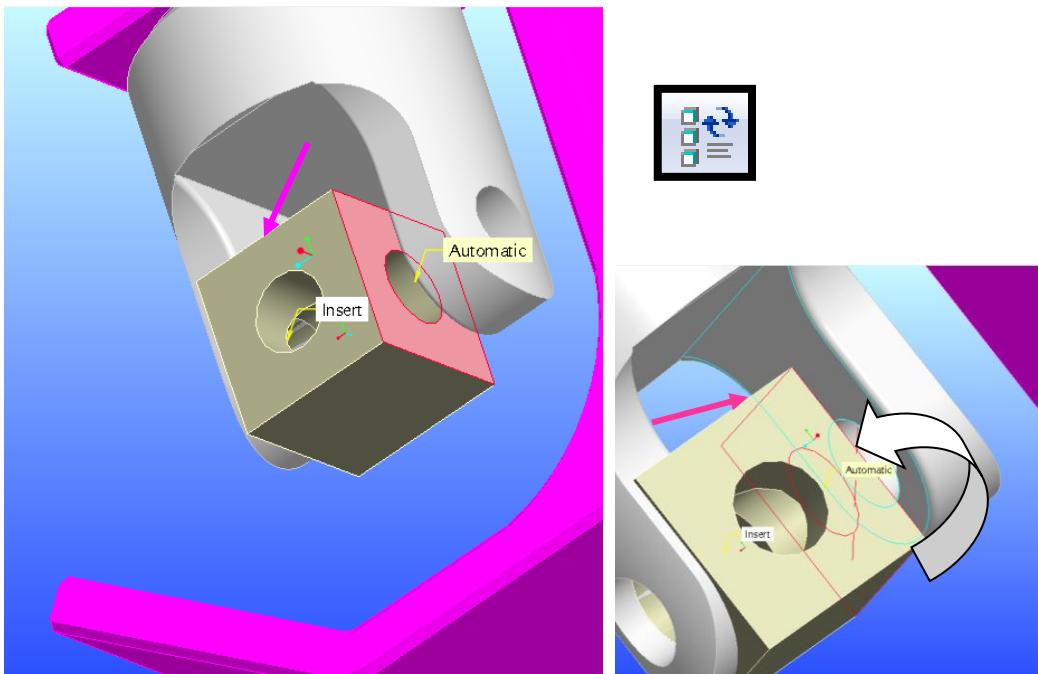


11. Select the concentric holes. Select the *yoke_female* leg and open face of the *spider*.

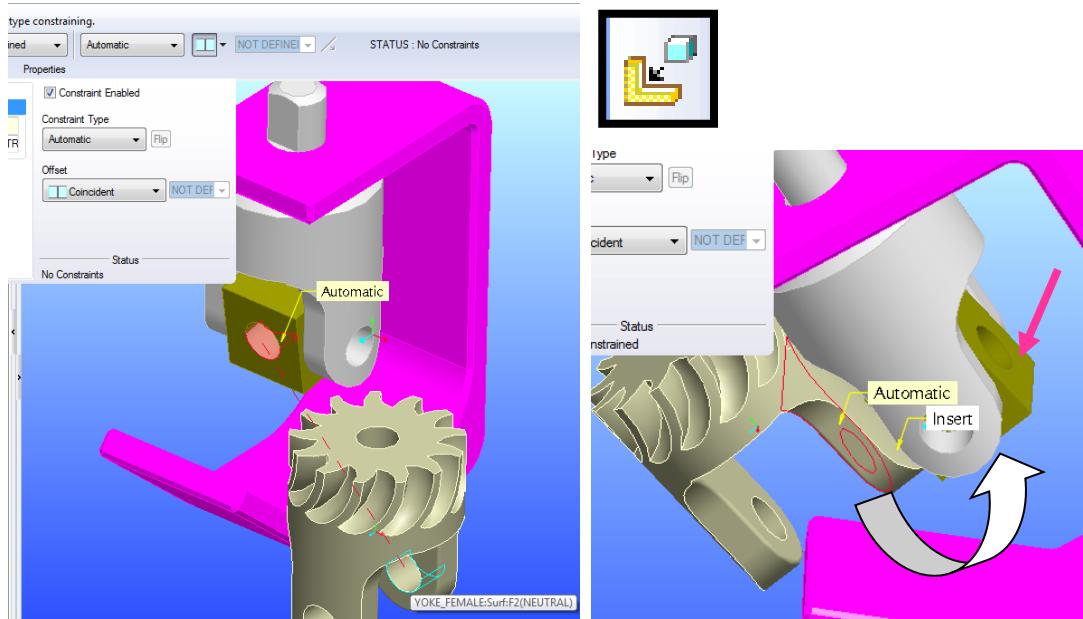


12. Use the **Drag Component** tool to locate the *yoke_female* near the bottom angled flange of the *bracket*.

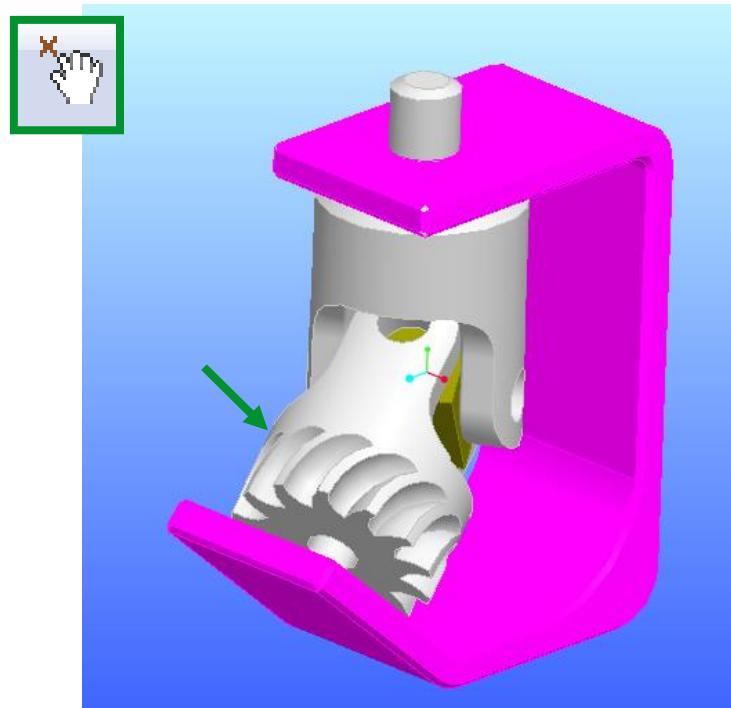


13. **Editing a Mate:** RMB select the Spider from the feature tree on the right of the screen. A pull-down menu will appear. Select Edit Definition.

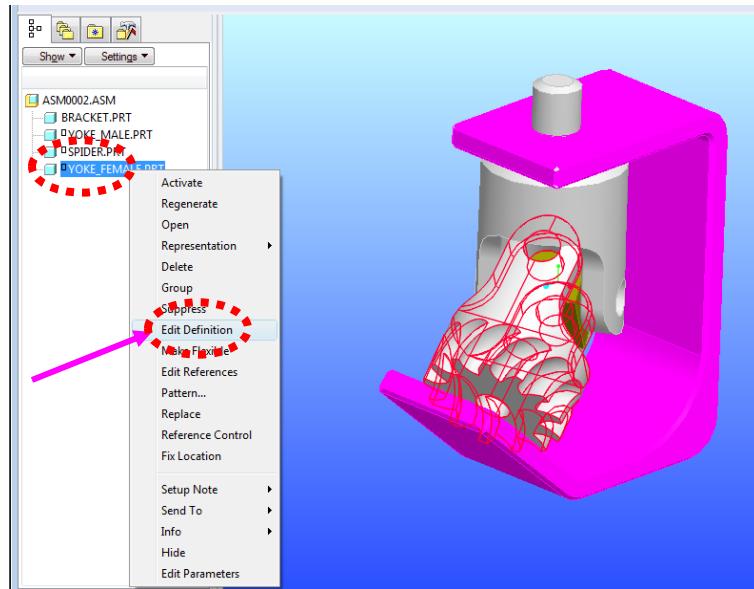


14. **Parallel Mate:** Select both bottom faces of the *yoke_female* and the angled flange of the *bracket*. Then select the *Orient to assembly reference* option to align parallel. (*Parallel* is needed here because there is a small gap between the parts.)

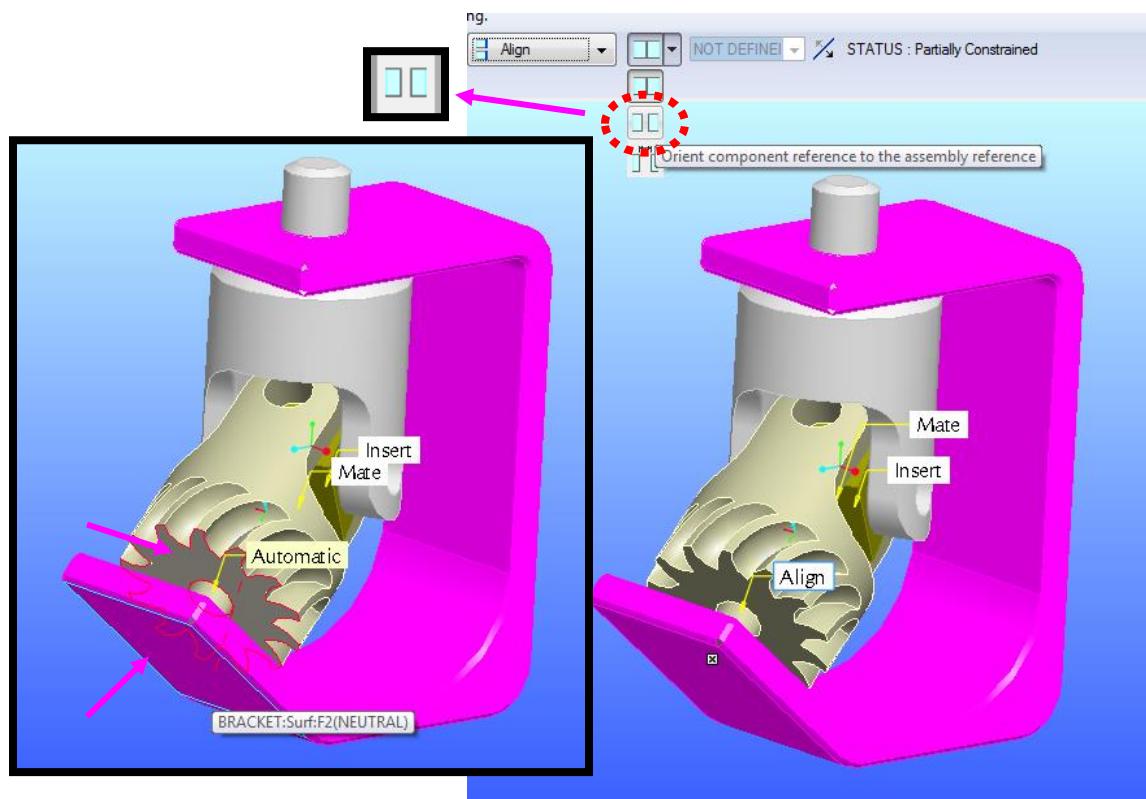


15. Insert the u-joint pin_2.prt, and select the cylindrical faces to mate.

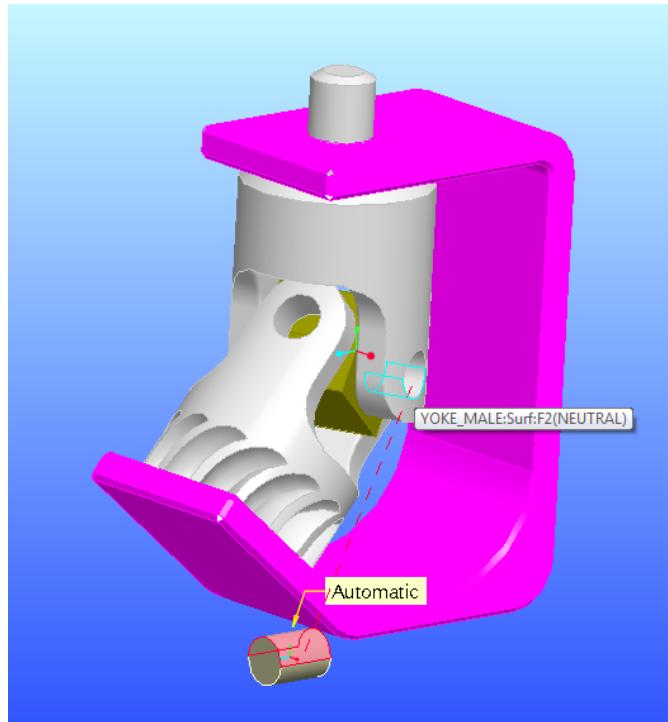


16. **Distance Mate:** Select the end face of the *pin* and then select a parallel flat face the *spider*. Add a distance of .35"

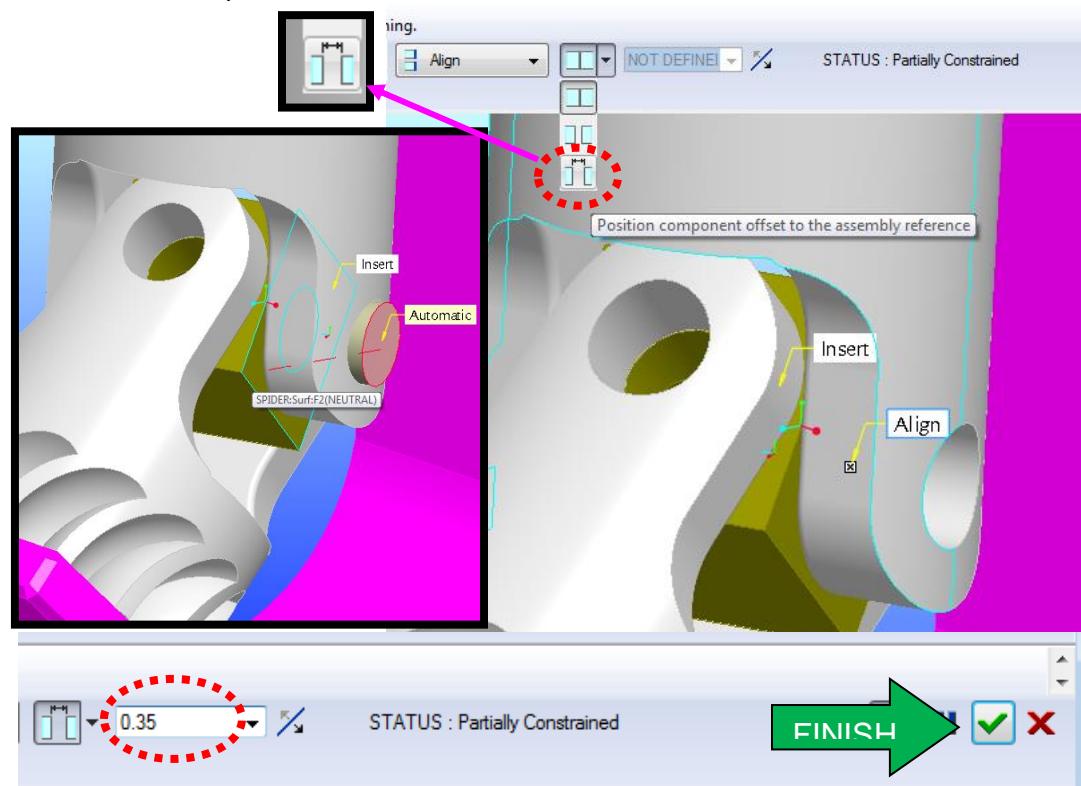


17. Attach the remainder of the components.

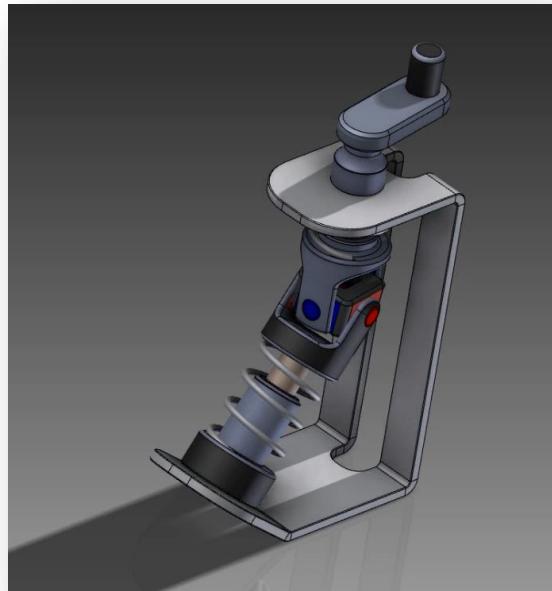

18. After completion you should be able to use the **Drag Component** icon to dynamically rotate the assembly.

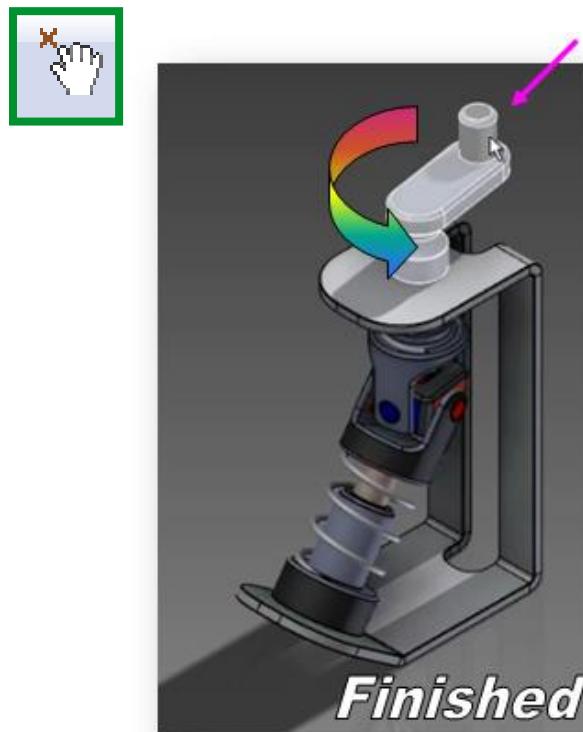

ITEM NO.	QTY.	PART NO.	DESCRIPTION
1	1	L4 REAR BEZEL	
2	1	L4 PC Board	
3	1	L4 FRONT BEZEL	
4	4	Battery Cell	
5	1	Connector	
6	1	LIGHT FRAME	
7	1	Battery Shield	

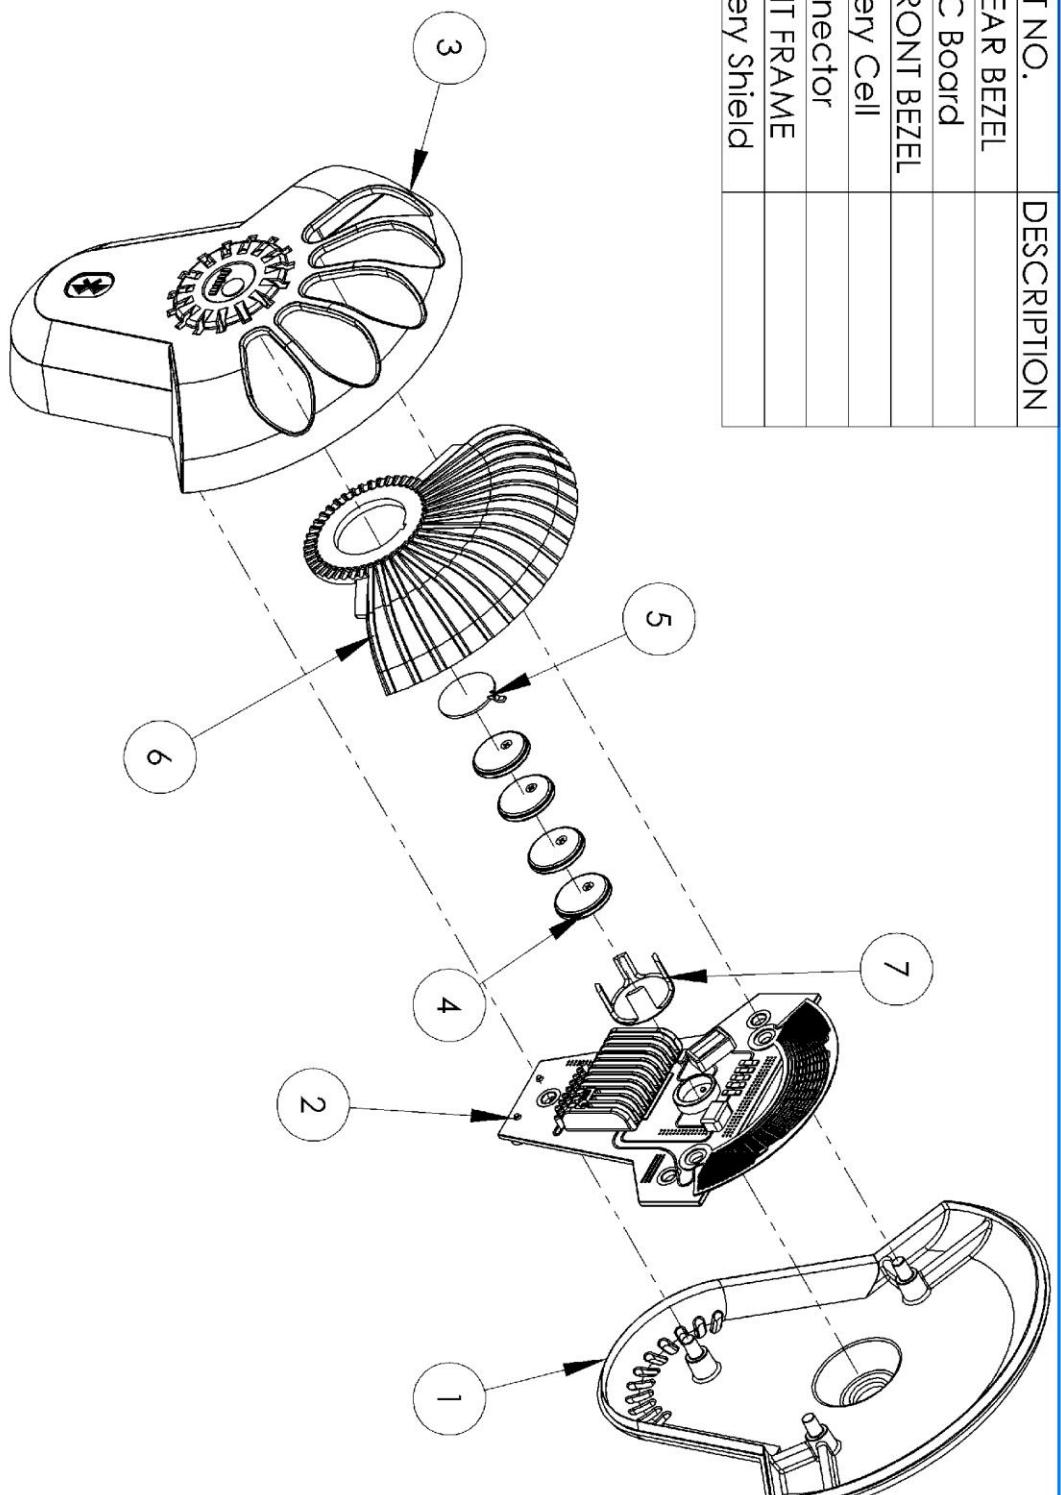


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
<INSERT COMPANY NAME HERE> ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
<INSERT COMPANY NAME HERE> IS
PROHIBITED.


EXERCISE 6

Fundamental 2D Drawing Creation


1. Open the “Exercise 6” part file.

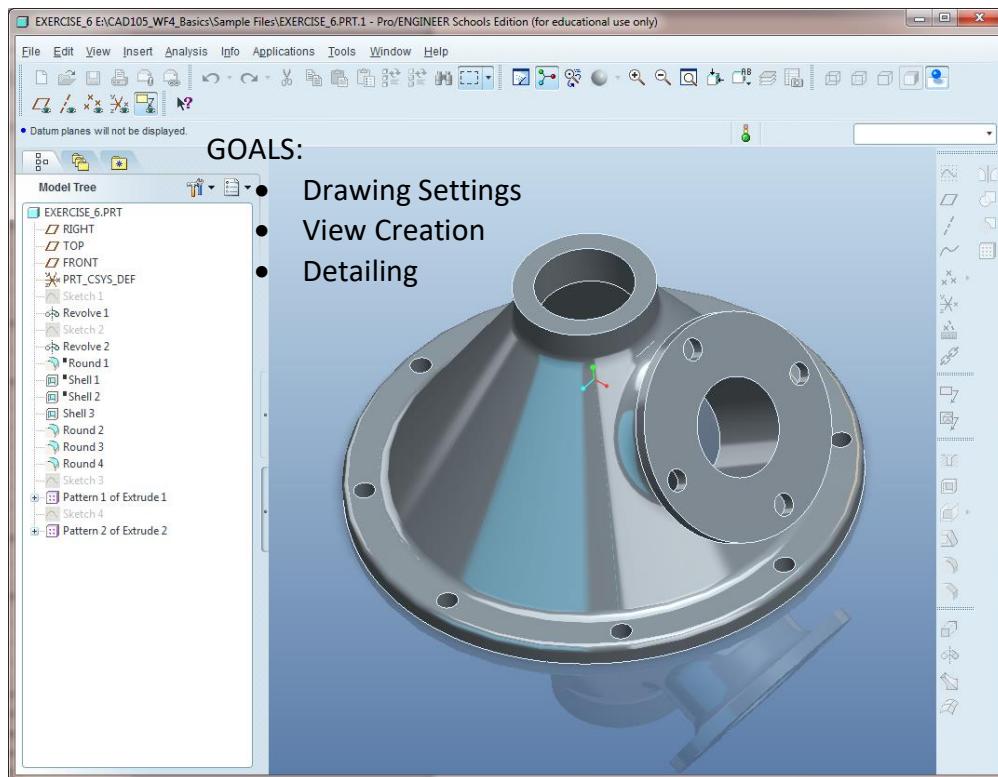


2. View Layout/Drawing Toolbar. Make sure Exercise 6 is shown in the “Default model” box, and select Empty with format, then select a_format.frm. You may need to browse to find the part if it does not show automatically.

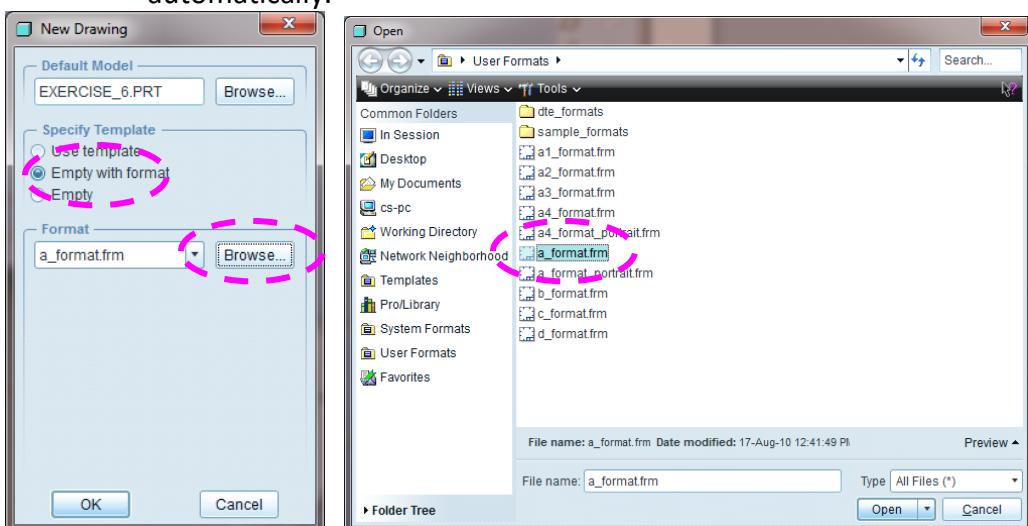


3. The standard a sheet should automatically show up.

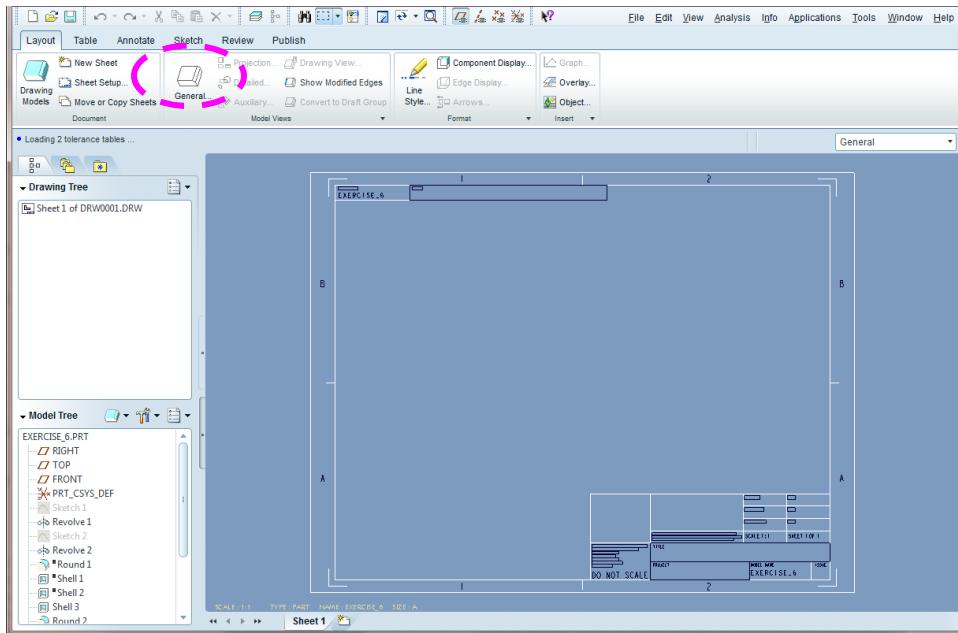

4. To insert views RMB (right mouse button) click/hold in the center of the drawing. Or select the “General” icon in the “Layout” tab tools ribbon.
5. Select “insert general view” from the list, and then left click to drop the new view in.
6. Select the “FRONT” option from the “Drawing View” dialog box and hit OK. ***NOTE: If you lose the “Drawing View” dialog box simply double click on the drawing view itself to return it.***

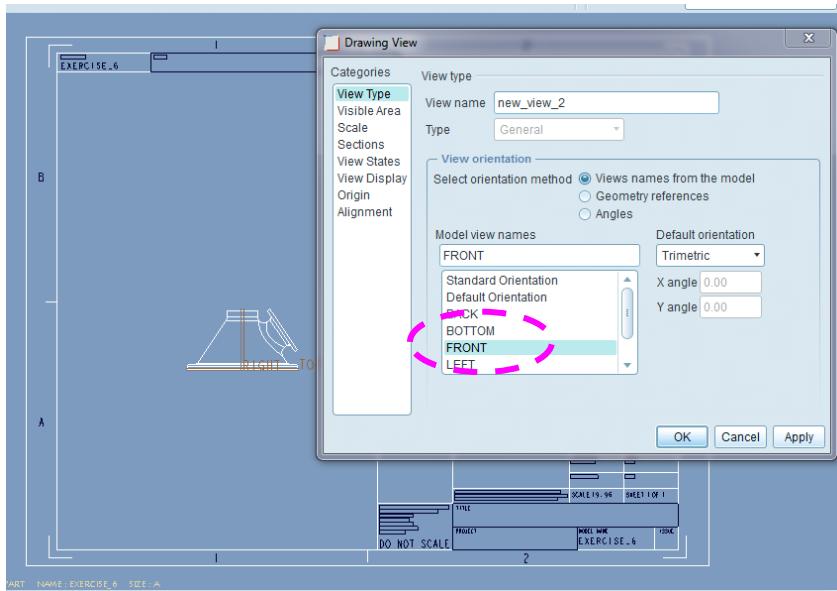


7. To move the views select the view then RMB click the “unlock view” option.
8. **Projection view:** Select the front view of the part then select the “Projection” option in the “Layout” tab ribbon.

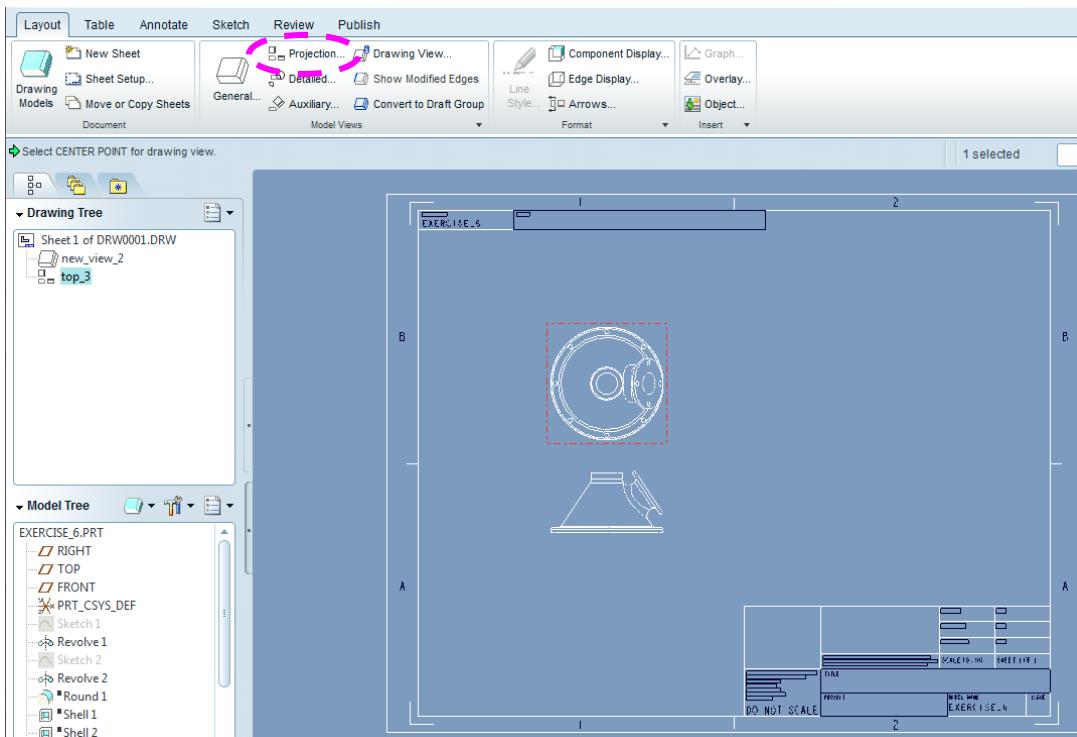


9. **Section Views:** Select the top view and repeat the projection view steps, and then move the pointer up, LMB click to drop the new view. Then double LMB click on the view to activate the options of that view.
10. Turn on/show the “Datum Planes”




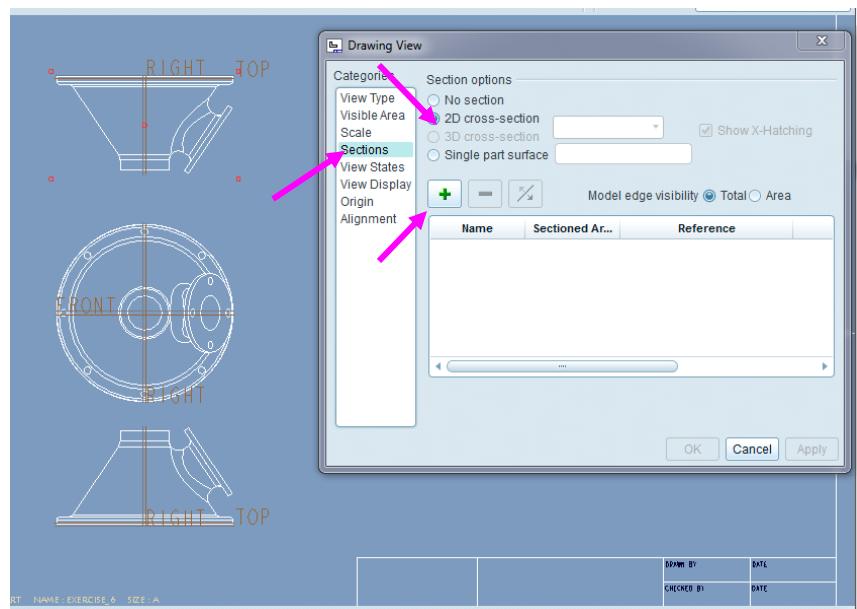


11. **Section Views:** Select the section option, in the menu manager select “Done”, and then create new, then type “A” in the text box and hit the green check mark at the right of the screen. Then select the Plane option to the right, finally you can select the actual plane (horizontal) on the top view.

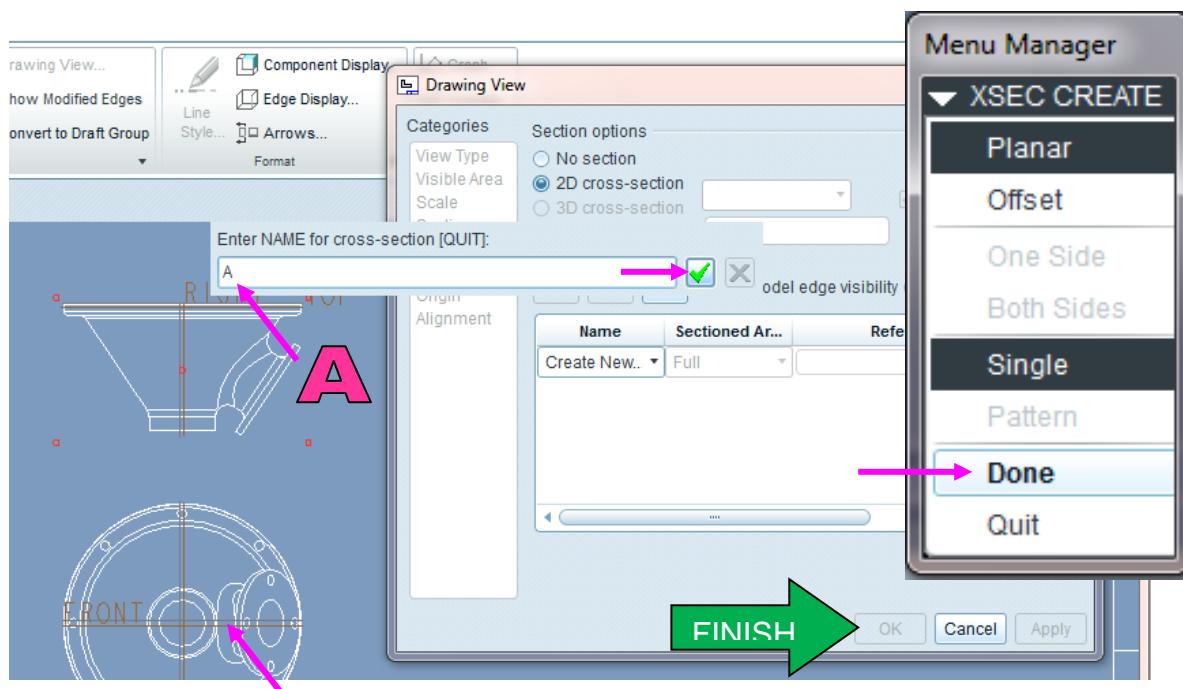


12. **Section view arrows:** You select and RMB click on the section view, then find “Add Arrows”, click on the Top view and they should appear.

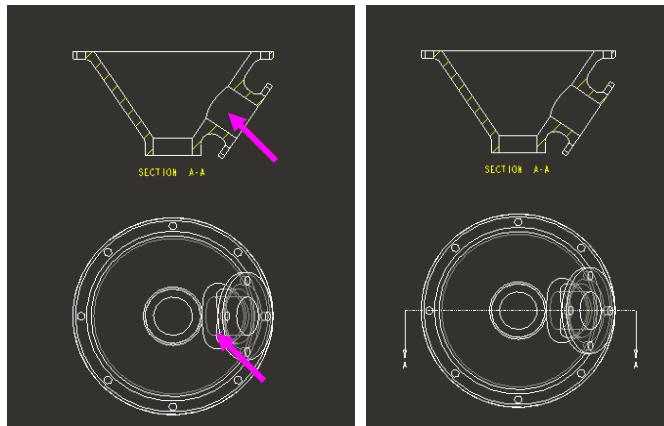


13. **Detail View:** Is added by selecting the “Detailed” tool in the “Layout” ribbon. (NOTE: Do not pre-select the view.)

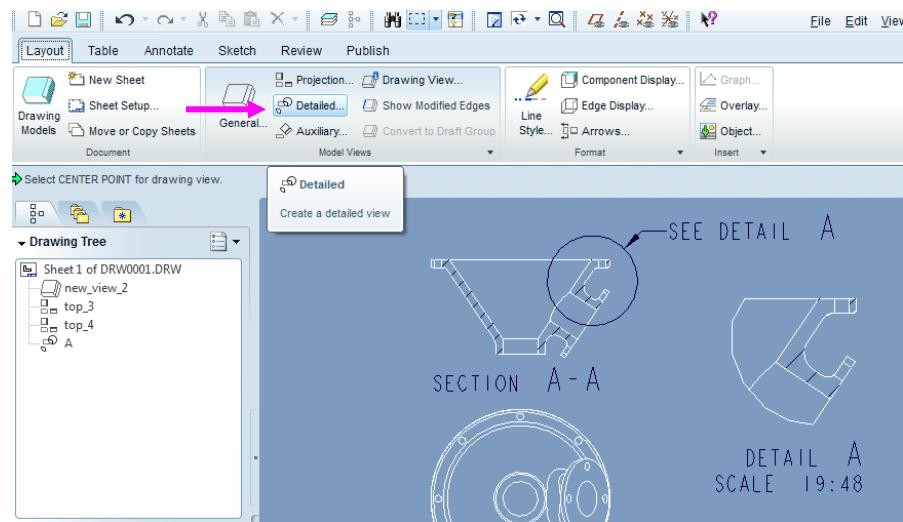


14. Select a center point for the view, and then sketch a spline around the area, and center mouse button click to close it. Then click to the right of the screen to locate and drop the new detail view.

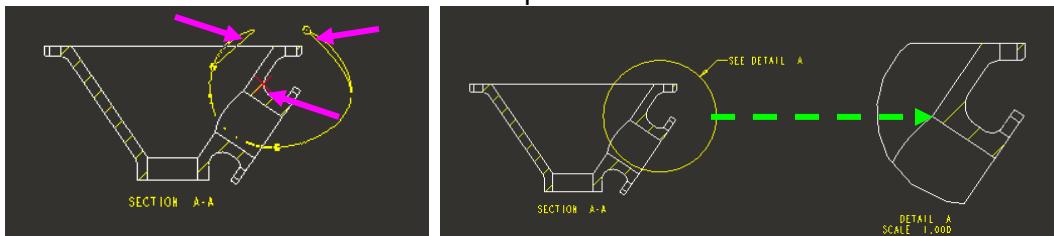

15. **Auxiliary views:** Are created by selecting the option then selecting the edge of the flange on the front view. Then select the drop point. Double click on the view to change its appearance.

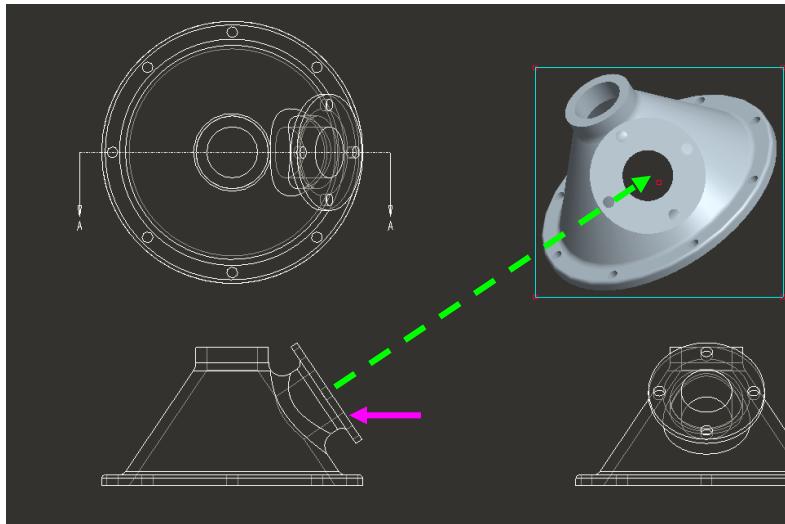


16. **Isometric General Views:** Are created when you select the general view icon. Then select the location to drop the view. Double click on the view to change the appearance.

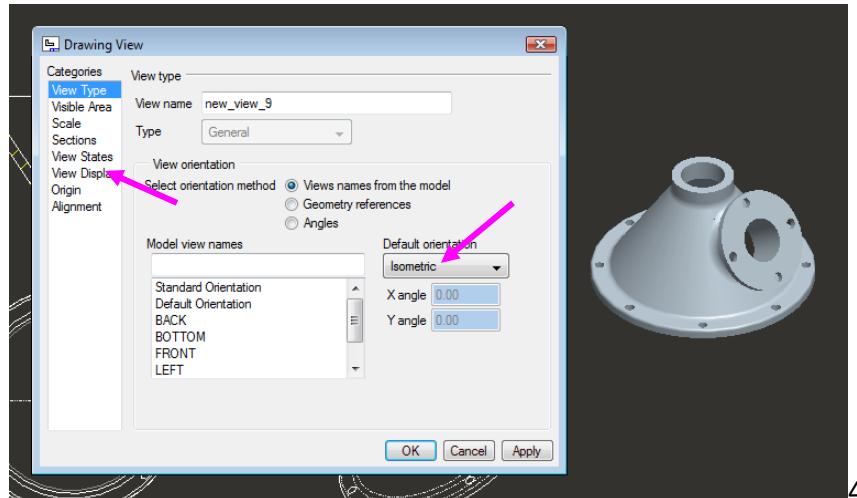


4

17. **View Display:** Can be used to change the views from solid to wireframe or hidden lines/HLR.

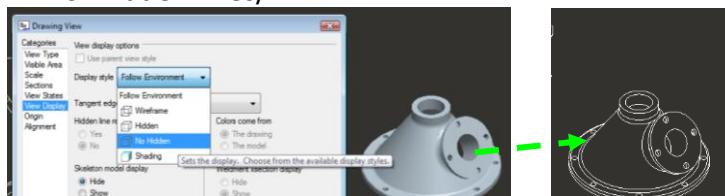


18. Dimensions and Annotations (2 Methods): Select the “.

- Import (Show Model Annotations)** dimensions used to create the model
- Create (New References)** dimensions (Note: reference dimensions cannot be changed)

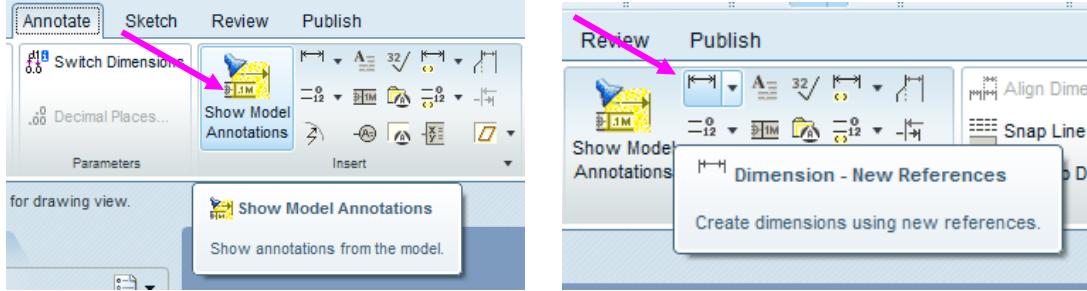


19. When importing dimensions try using the feature/view option versus inserting all the dimensions for the mode as it will cluster all them together. Feature helps reduce the cluster and yet the dimensions are editable, providing the benefit to edit the actual parts and assemblies in a bi-directional fashion from the drawing.

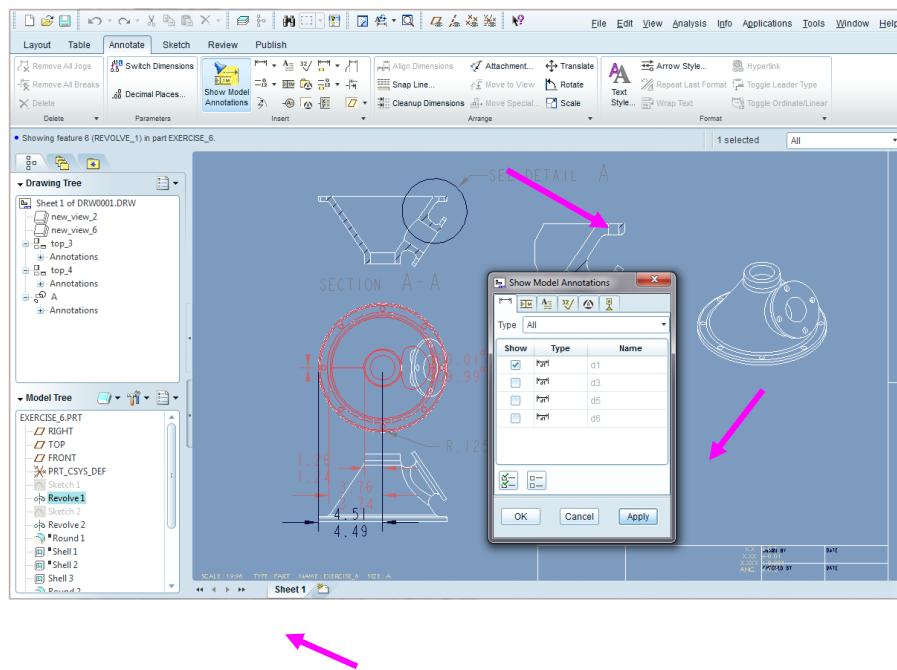


20. Editing the Sheet: use the “Note” tool to enter your name and part number.

21. **Printing:** Select the “Publish” tab for print and print preview options. Note if you find it difficult to print using the Pro Engineer printer tools select the “PDF” option and print from Adobe instead.

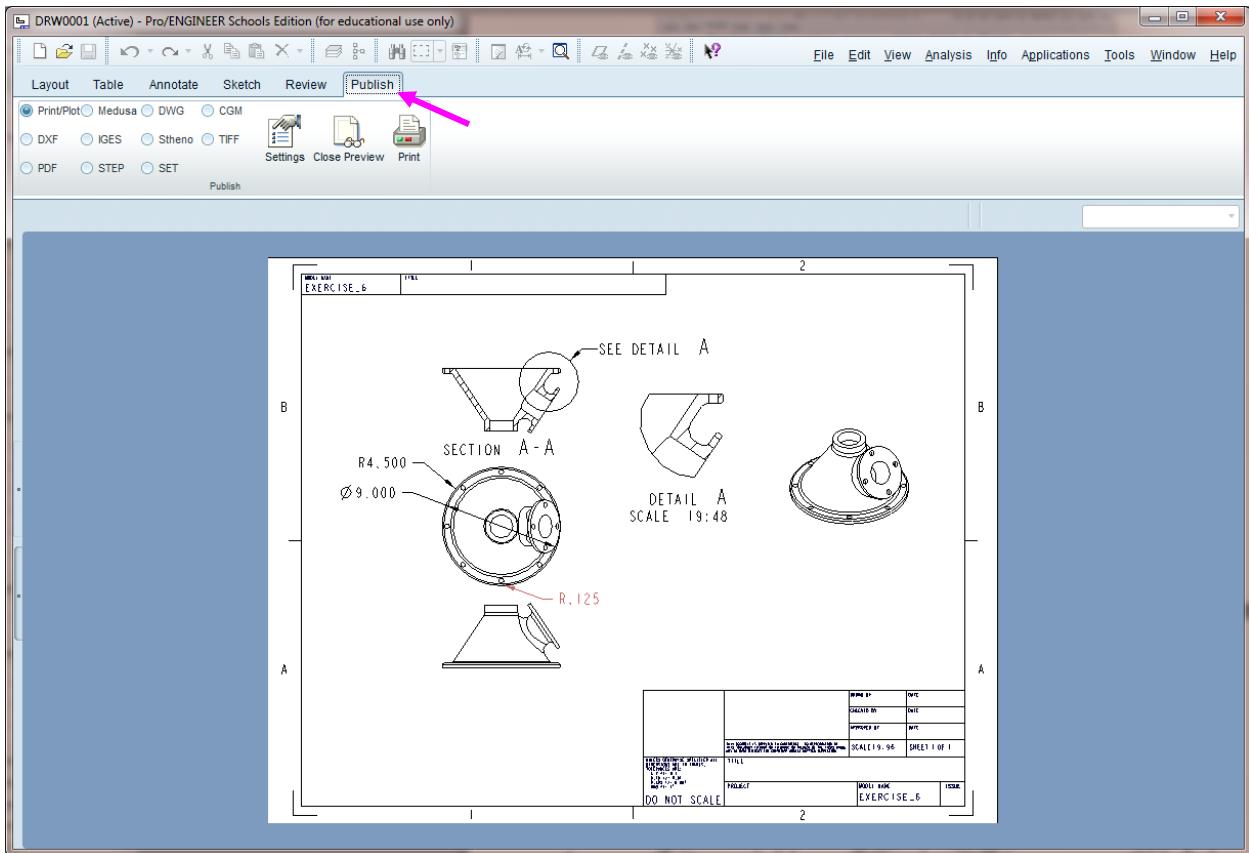

22. **Transitioning from Radius to Diameter** when dimensioning, is simply done by double clicking on the desired edge then middle click to drop a Diameter dimension. Versus a single click on an edge will result in a radius.

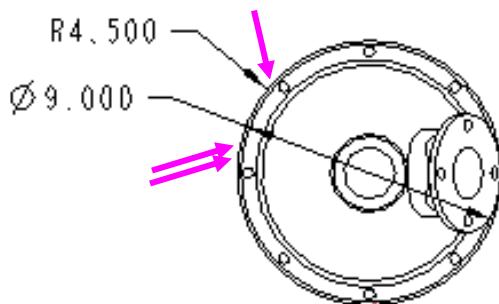

B

SECTION
A-A




SEE DETAIL

A



ϕ 9.000
 ϕ 1.750
8 PLCS
 ϕ .375

NEW_VIEW_5

A

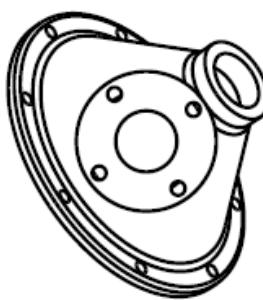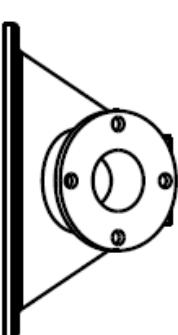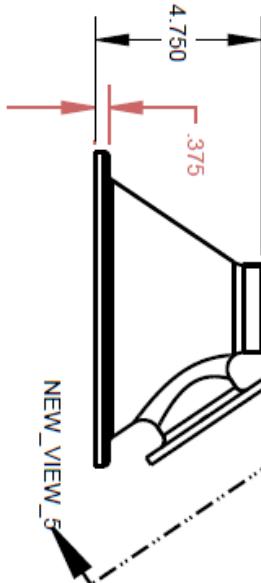

DETAIL A
SCALE
1:2

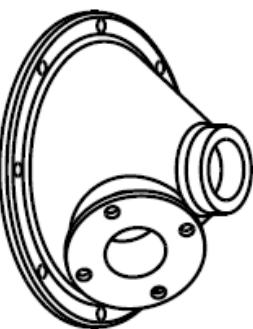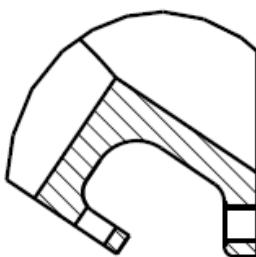

NOTE: THIS DRAWING
IS NOT IN ACCORDANCE
TO ANSI STANDARDS.
IT IS ONLY A SAMPLE TO EXPLAIN
THE FUNDAMENTAL TOOLS IN PRO/E.


UNLESS OTHERWISE SPECIFIED ALL
DIMENSIONS ARE IN INCHES.
XX-X-.11
X-.000-.010
AND +-.001

DO NOT SCALE

A

B


PROJECT	MODEL NAME	EXERCISE_6	ISSUE
---------	------------	------------	-------

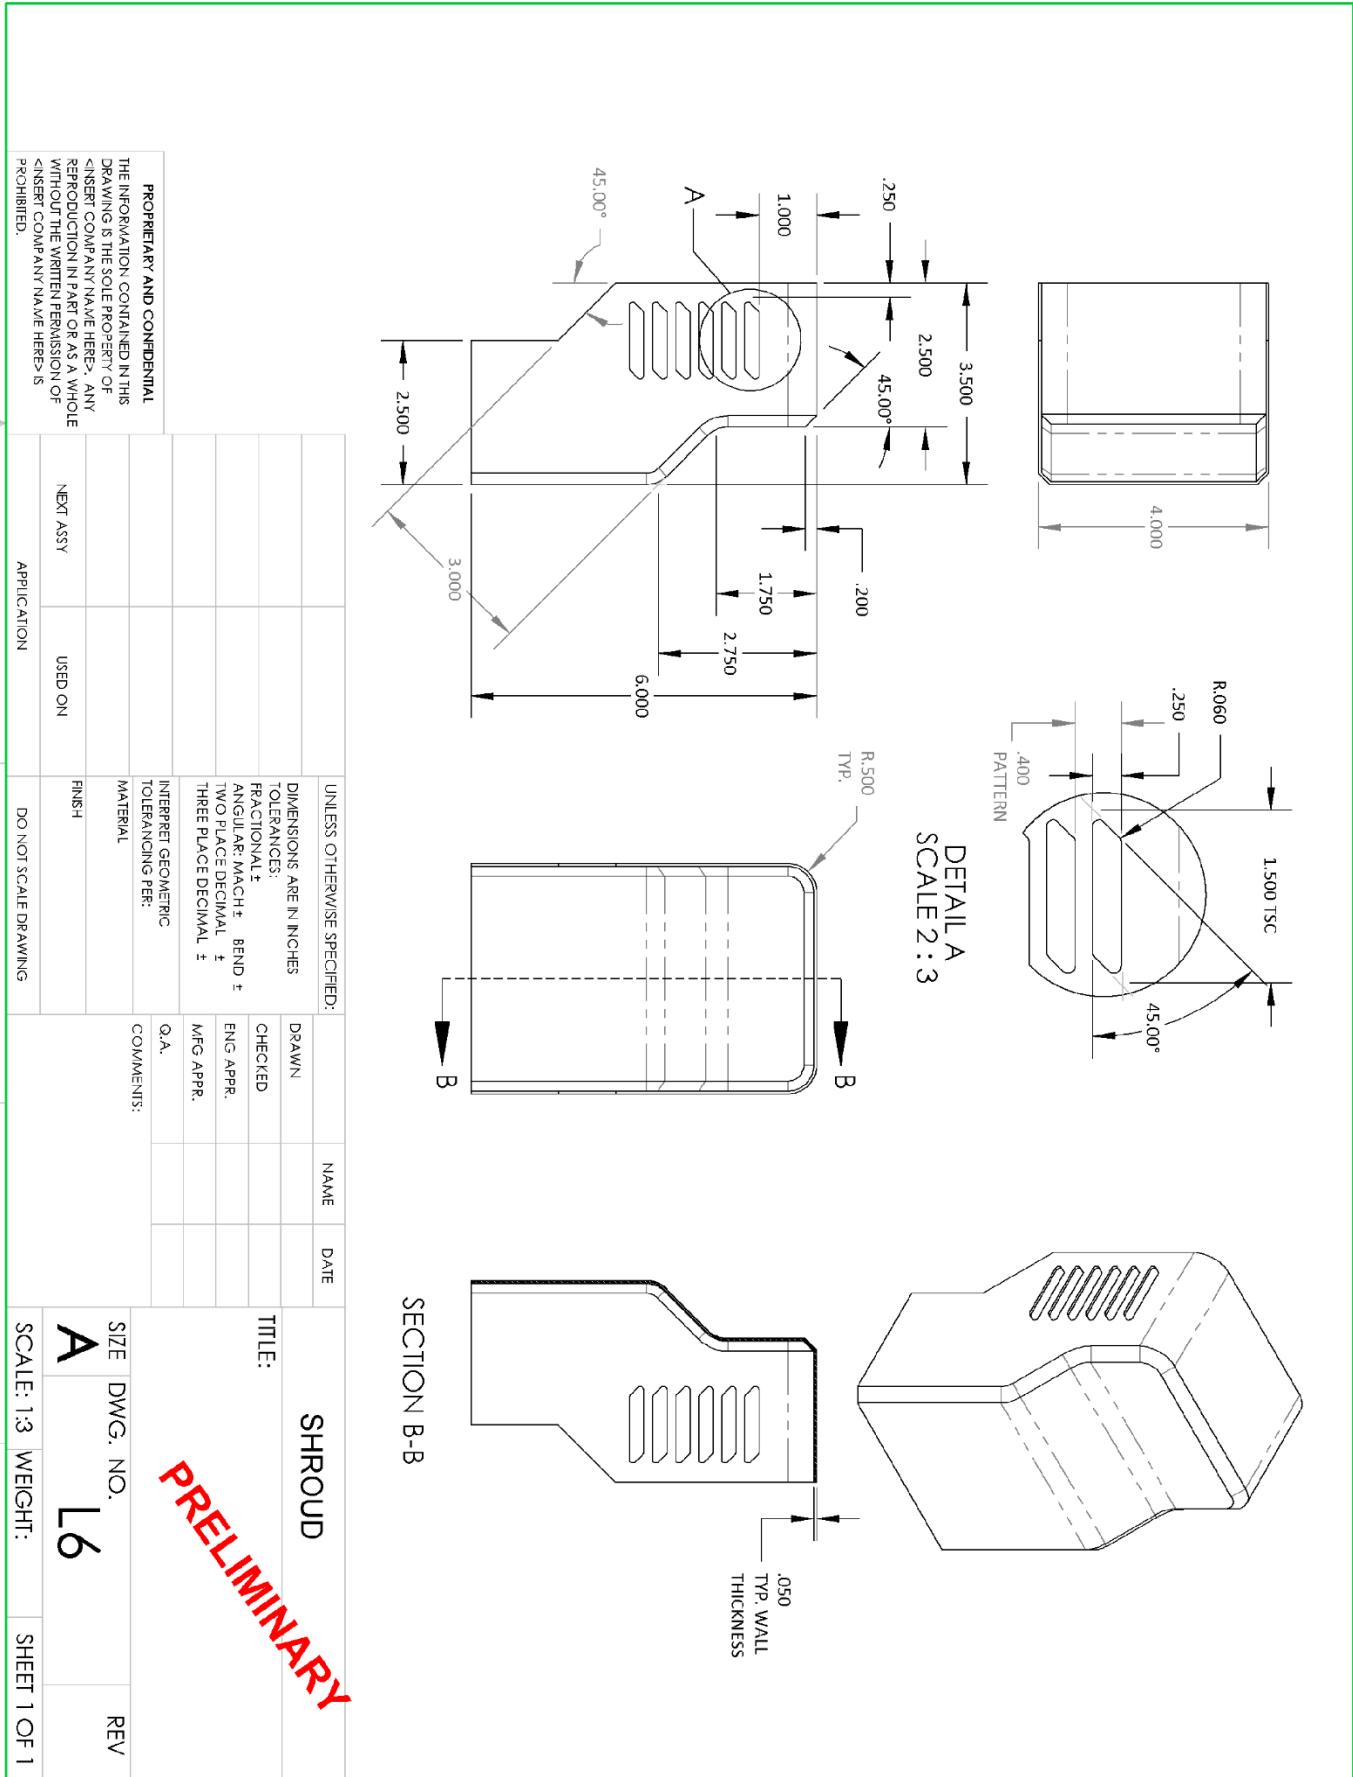

EXERCISE 7

Projected Curves and Sweeping


1. Sketch this on the “Front” plane.

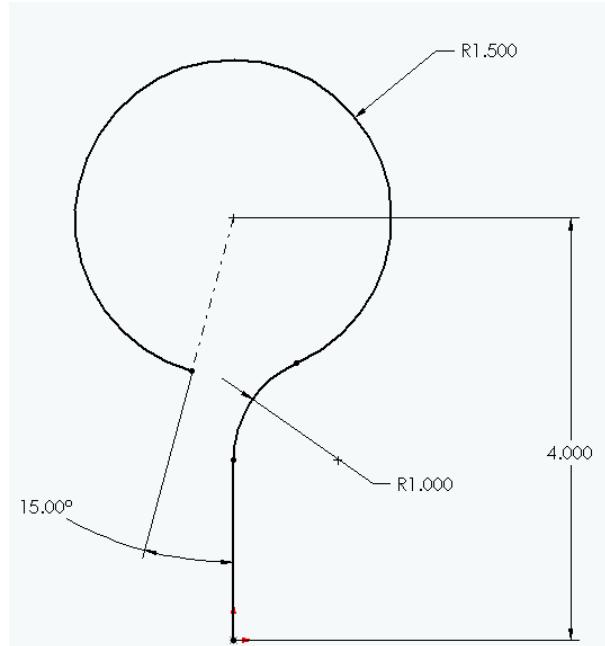

GOALS:


- Sketching
- 3D Guide
- Curves
- Sweeps
- Mirroring

2. Hit “Done” to exit the sketch.
3. Select the “Right” plane and start a sketch on it.
4. Draw the following.

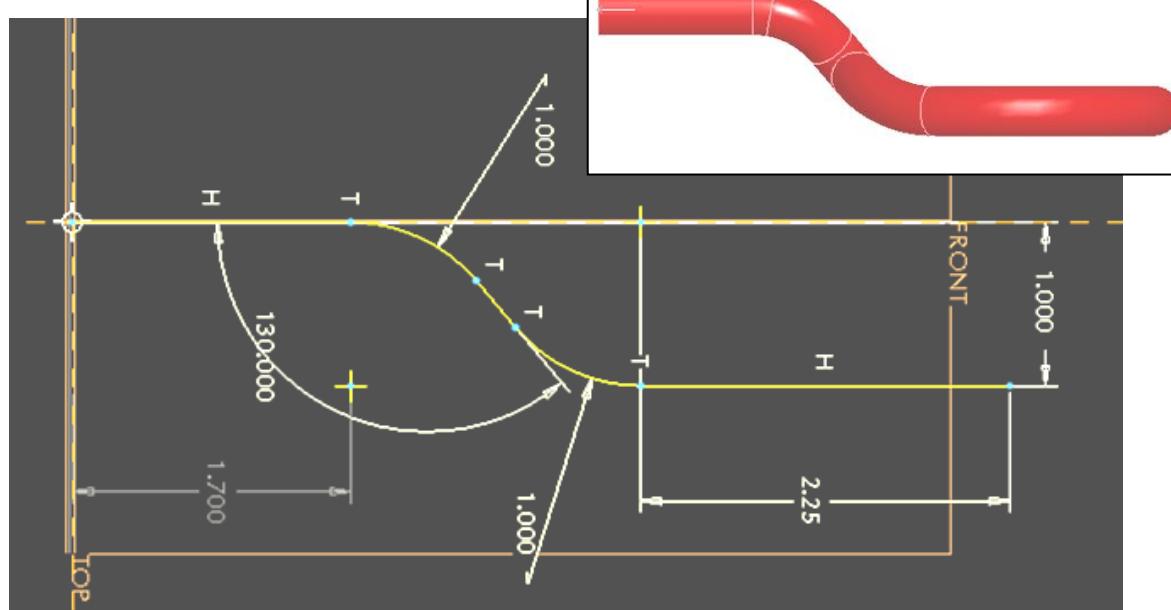


5. Hit “Done” to exit the sketch.


6. Extrude the curve Mid-Plane 4". It should extrude as a surface. Hit the green check to apply.

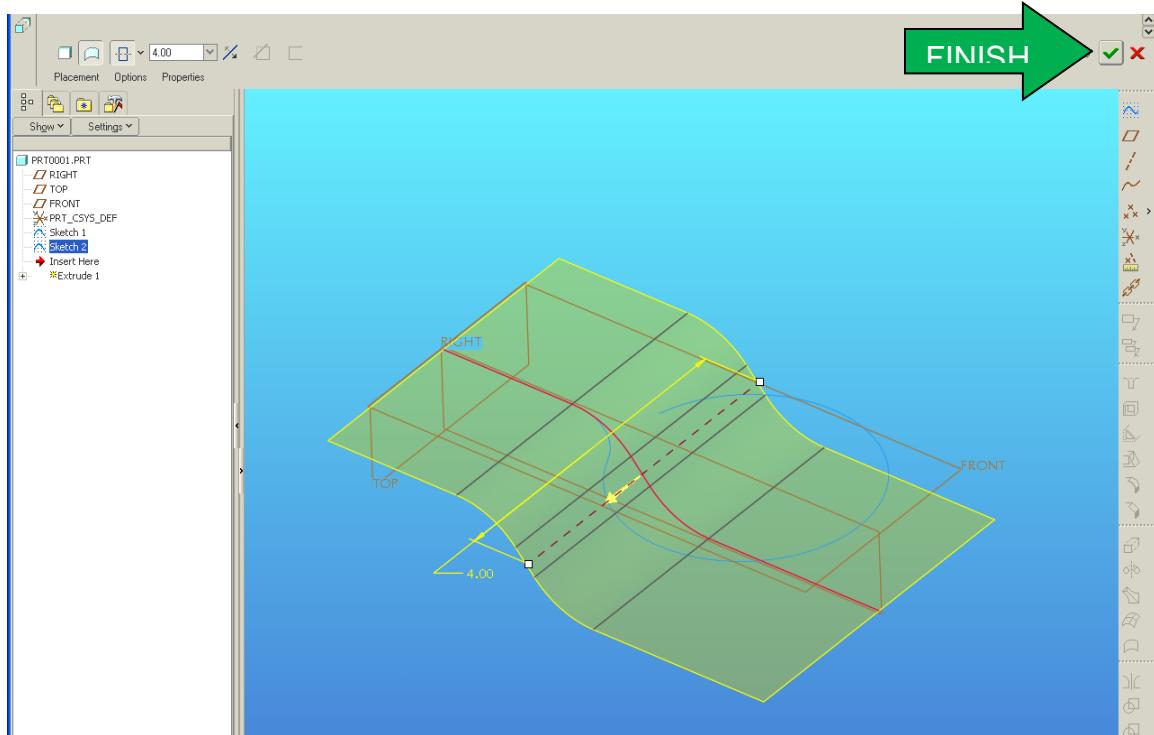


7. Go to. Then go to Edit/ Project.

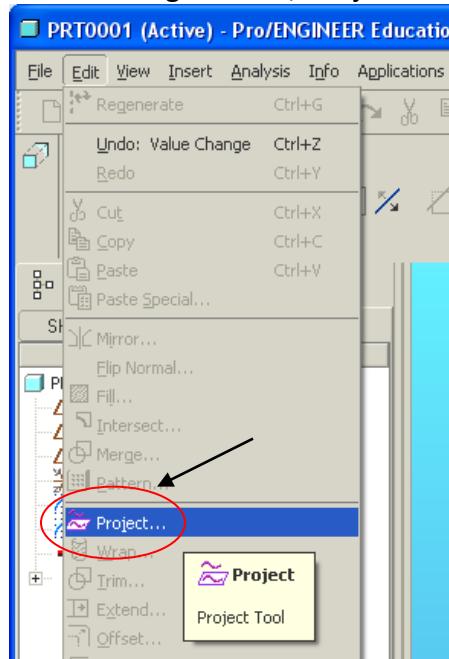


8. Select References/Project a sketch/**Sketch1-Curve that you drew/CTRL select all surfaces**/**Select the Front Datum/ Flip the arrow**

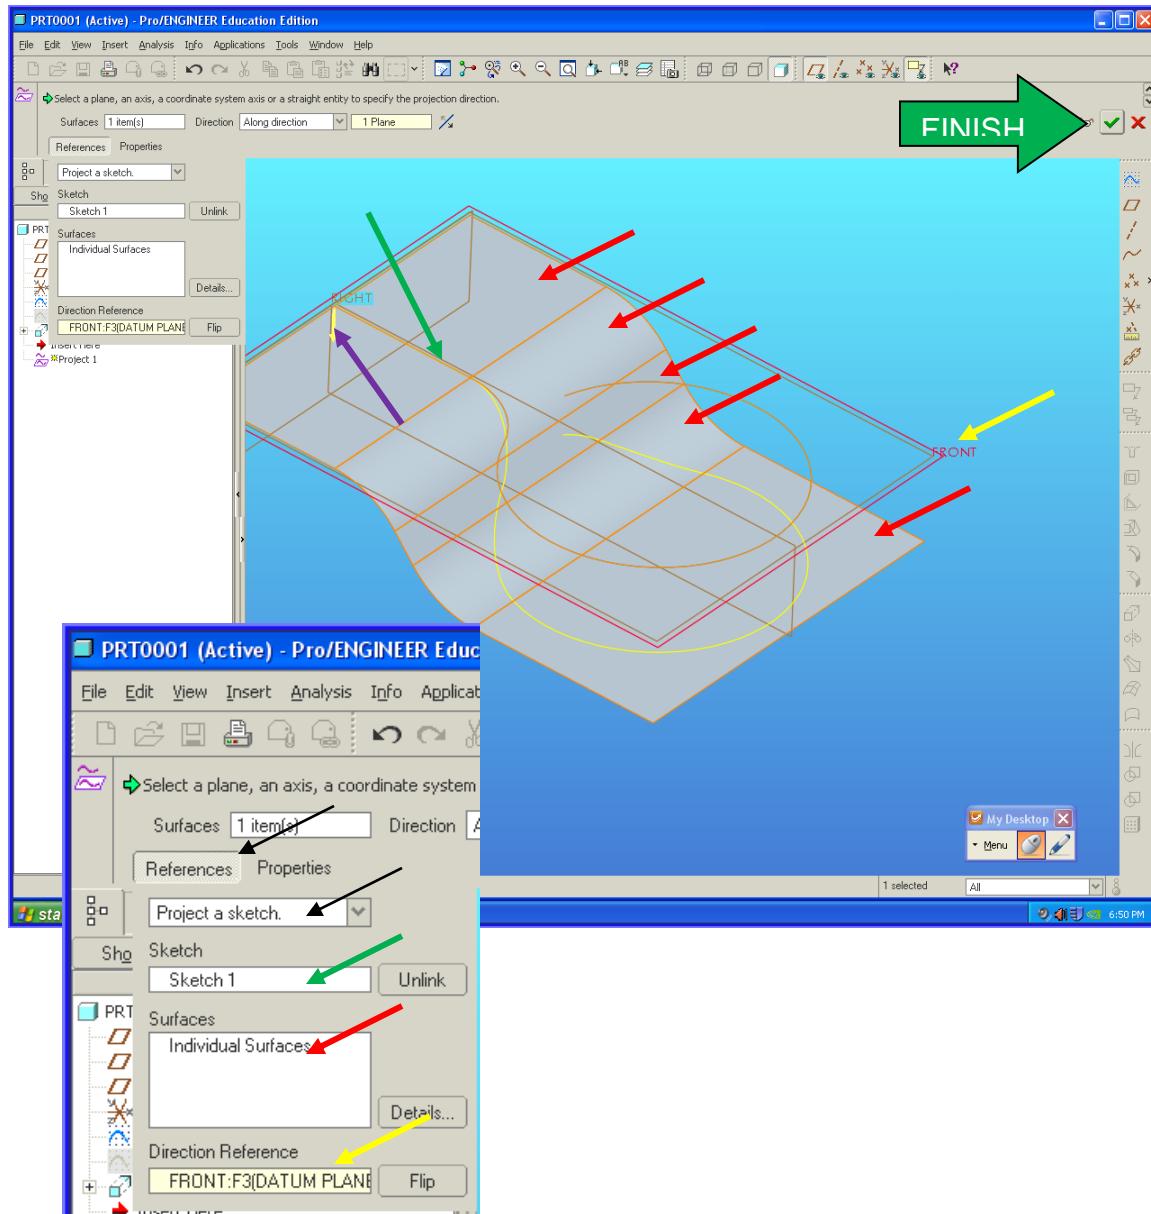


9. Select the surface and RMB click to find the “Hide” option.

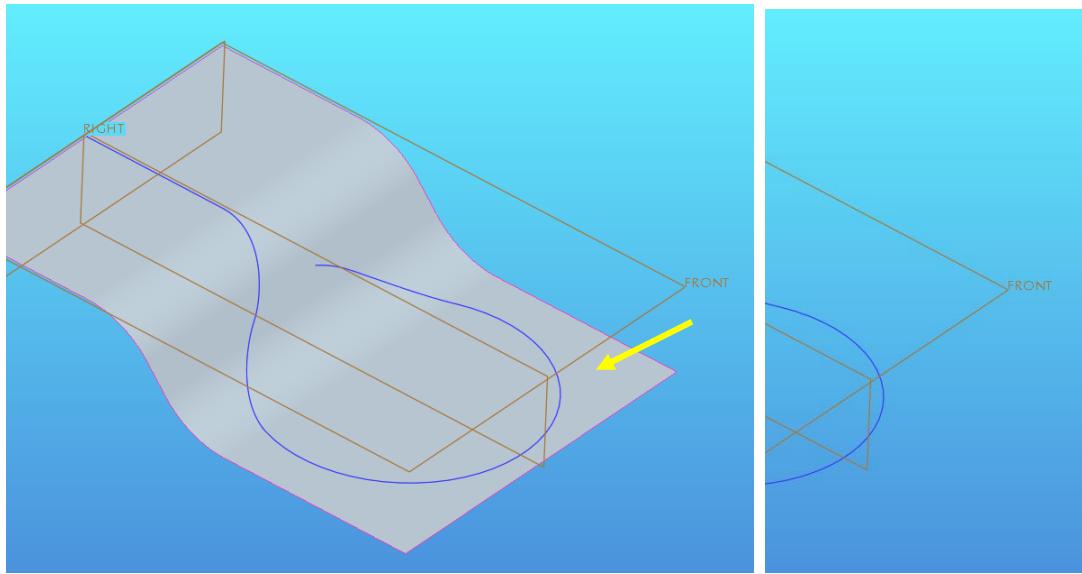


10. You should now have a single 3 Dimensional curve.

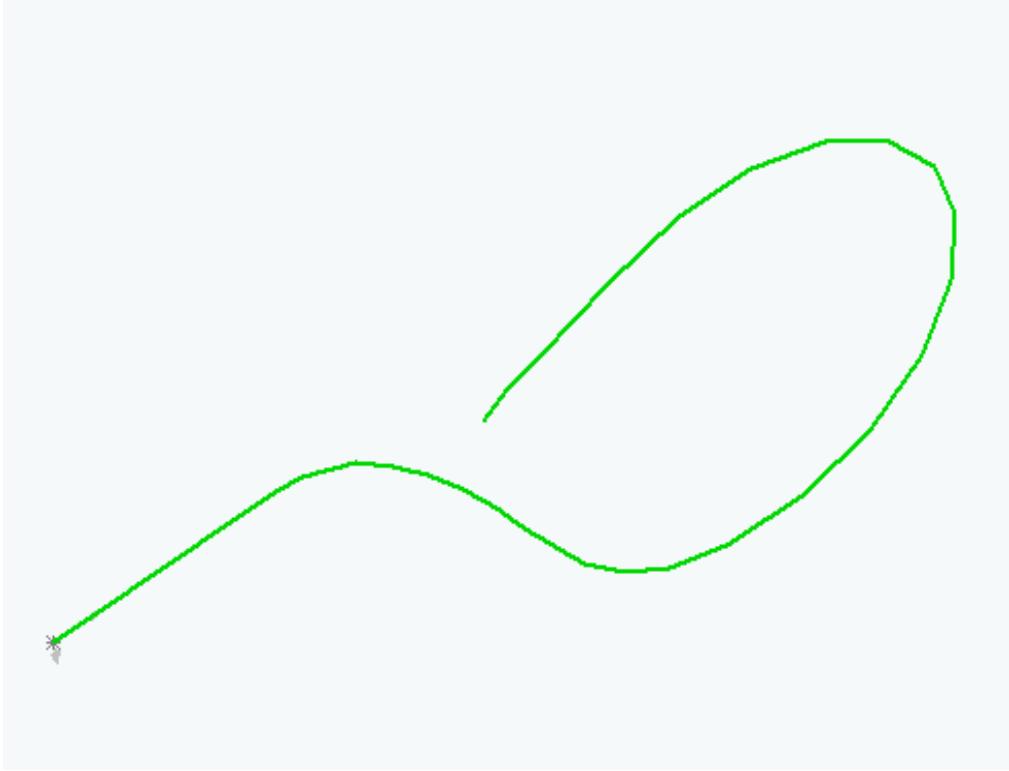


11. Hit the “Done” icon and Sweep/Protrusion using the curve as the Path and the circle as the Profile.
12. Also select: “SelectTraj/Curve Chain>Select All/Done/Done”

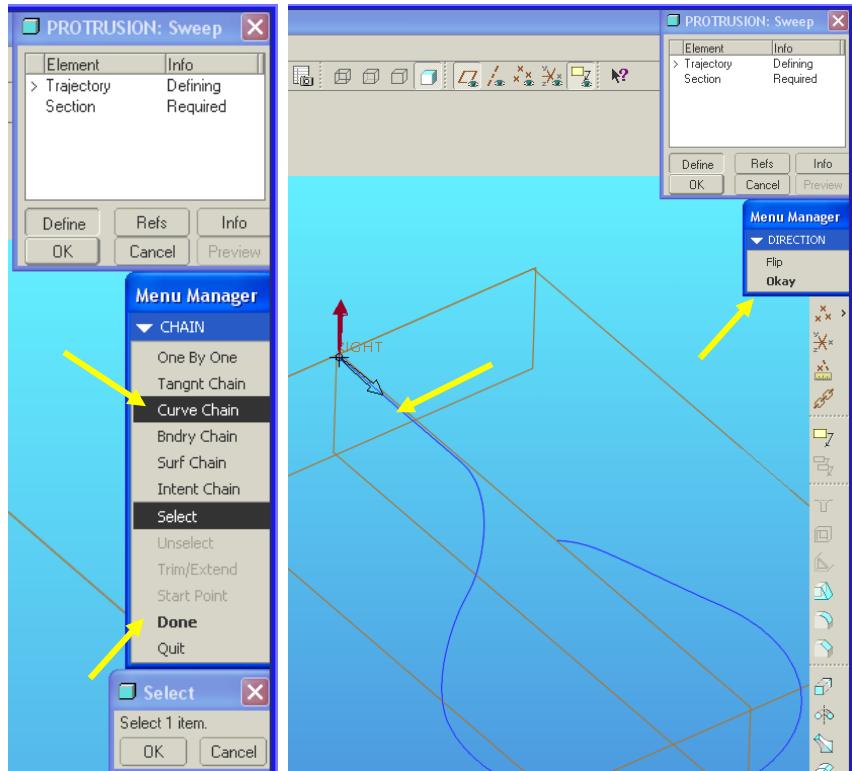


13. Draw a .500" circle at the intersection/end of the curve. Select “Done” and “OK”

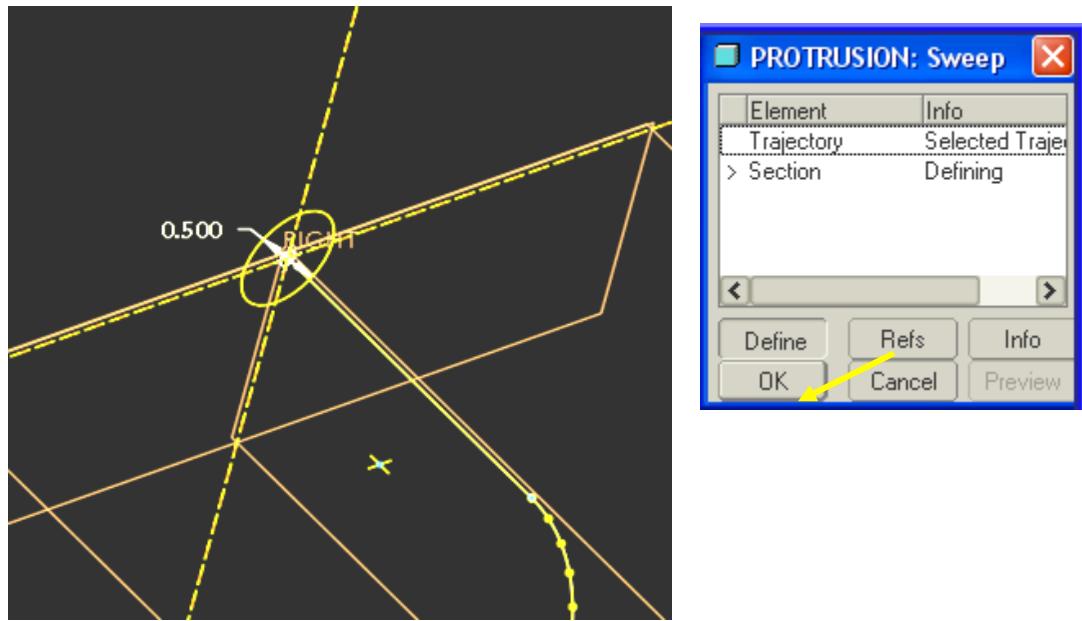

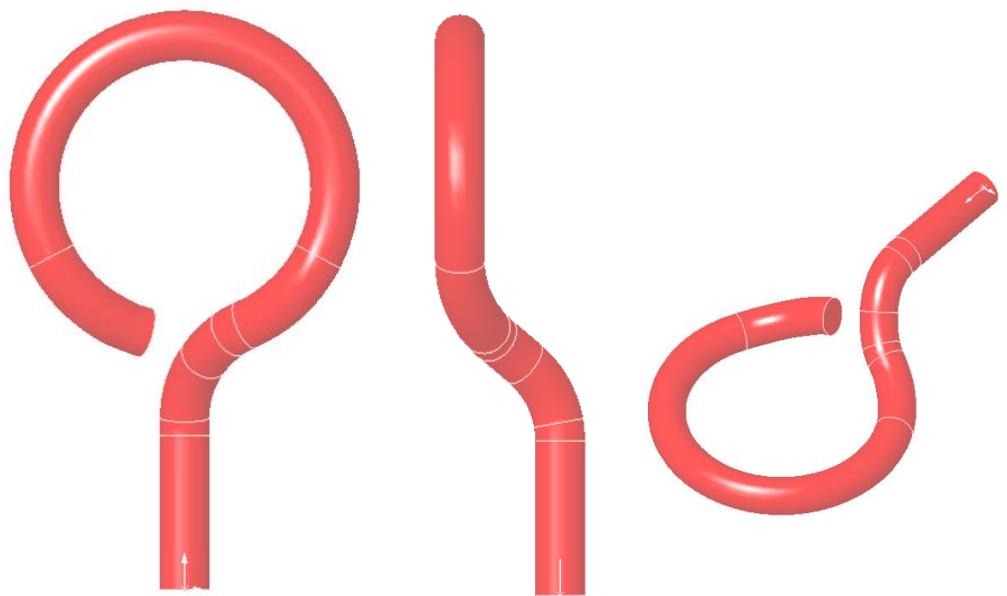


17. Start a sketch on the “Front” plane. Draw the following.

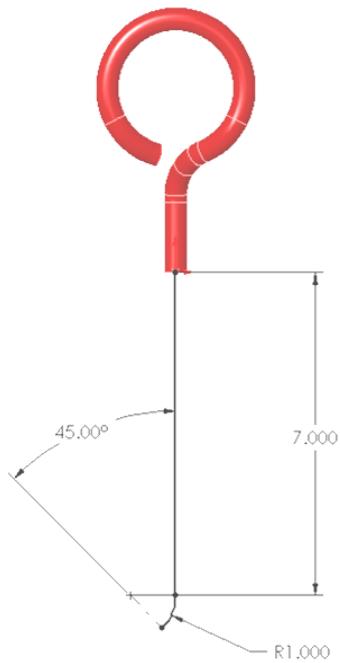


18. Select “Done” to exit the sketch.


19. Select Sweep/Protrusion using the curve as the Path and the circle as the Profile.
20. Also select: "SelectTraj/Curve Chain>Select All/Done/Done"

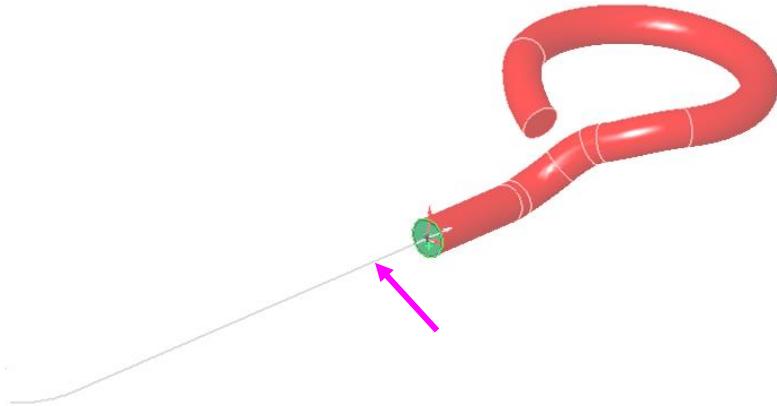


21. Select the concentric circle icon (buried under the circle tool). Select the edge of the face and click over the edge to assume an “Equal” diameter ($R1/R1$)

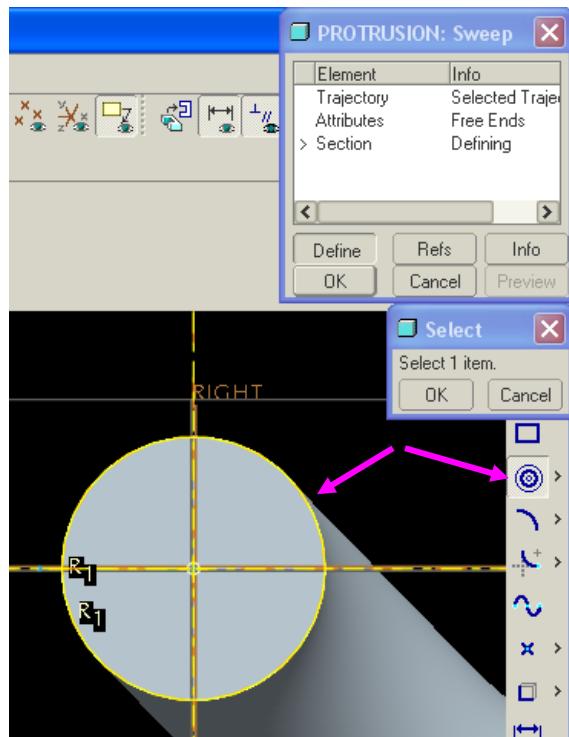

22. Sweep using the new path and converted entity as the profile.

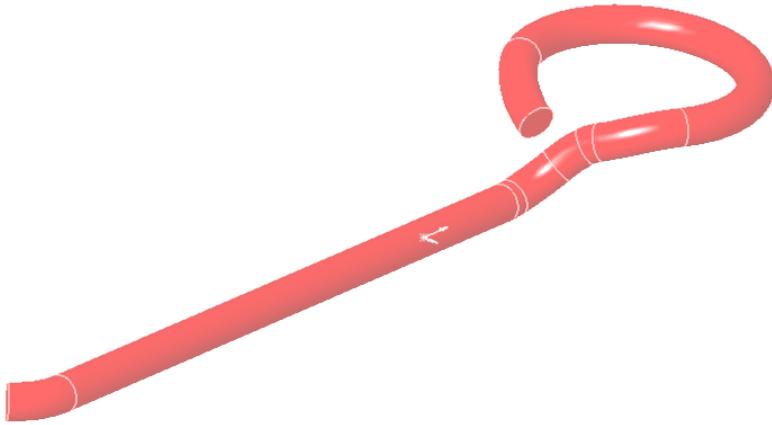


22. CTRL Select both **Protrusions** from the Feature Tree, and then select the **Mirror** icon. Then select the **end face** of the body.

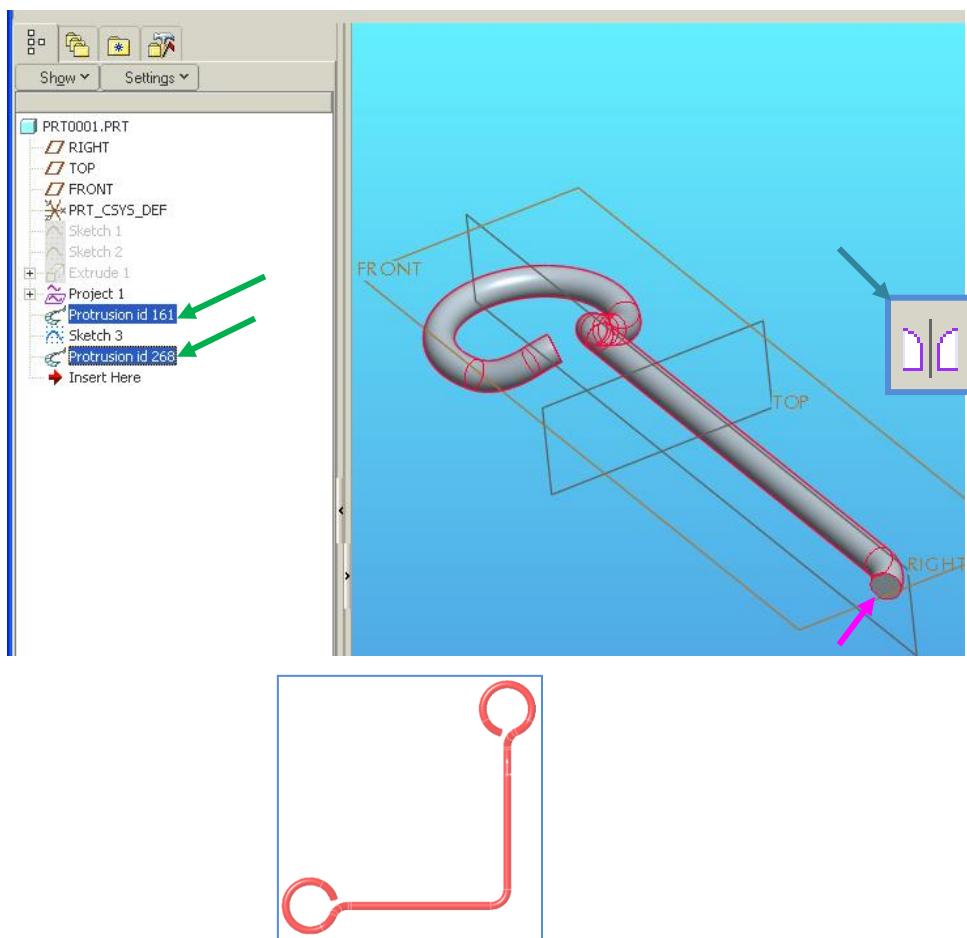



23. Now using the tools you have learned over the past 5 weeks finish the remainder of the model.

Hints to complete the model...

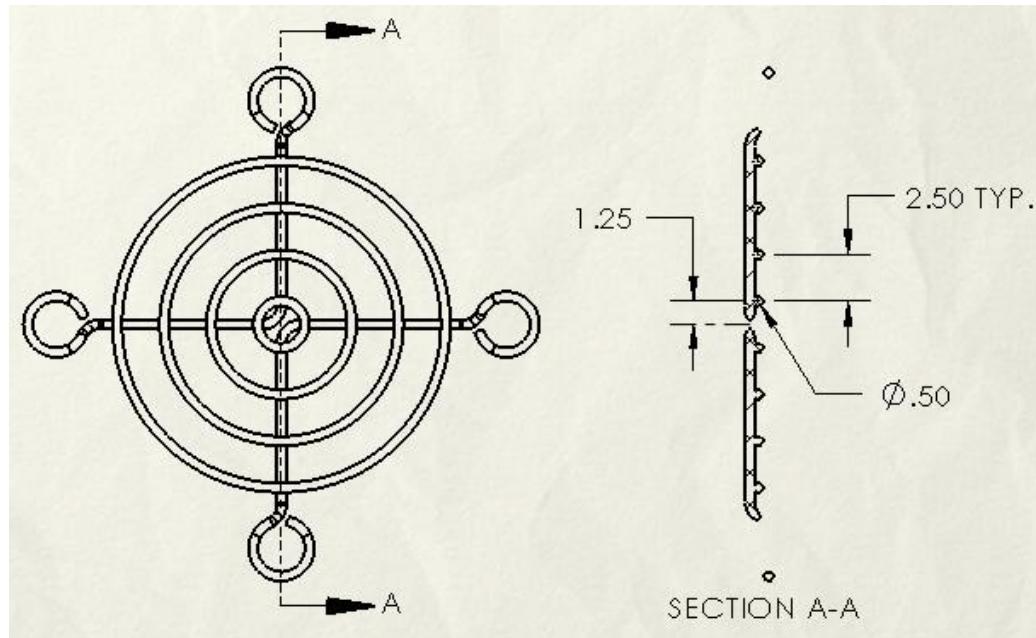



24. Revolve “Two Directions”

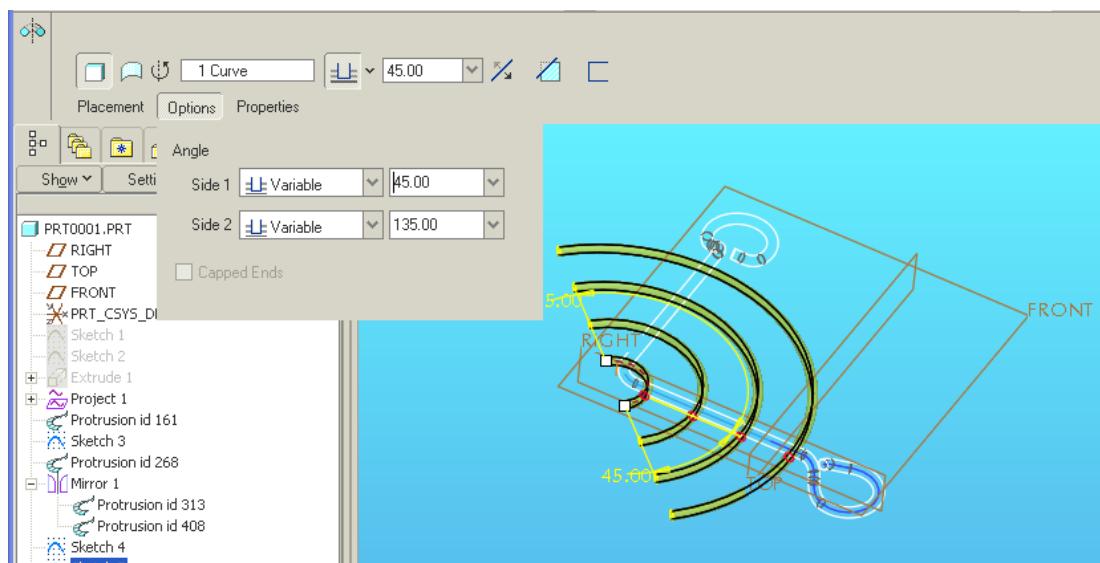

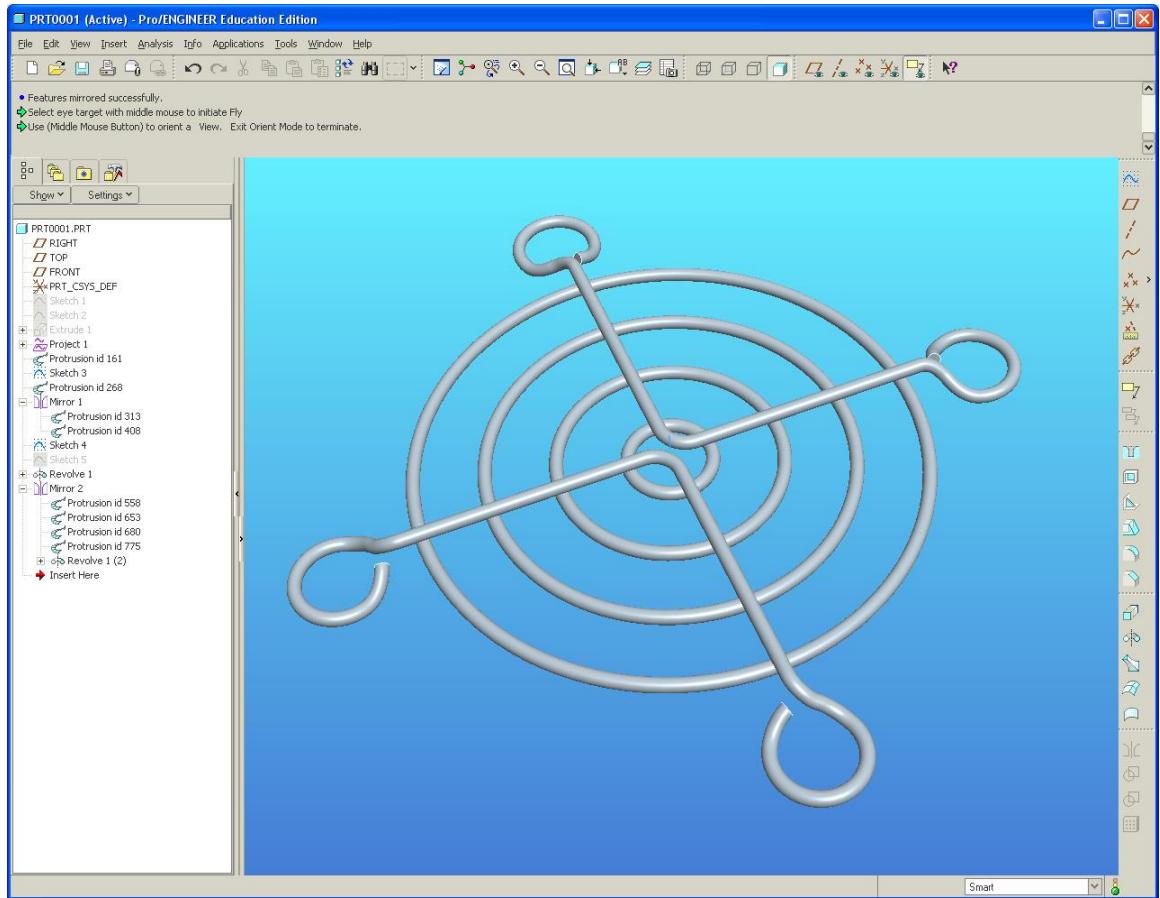

The completed part; check to see if your feature tree looks the same as this one.

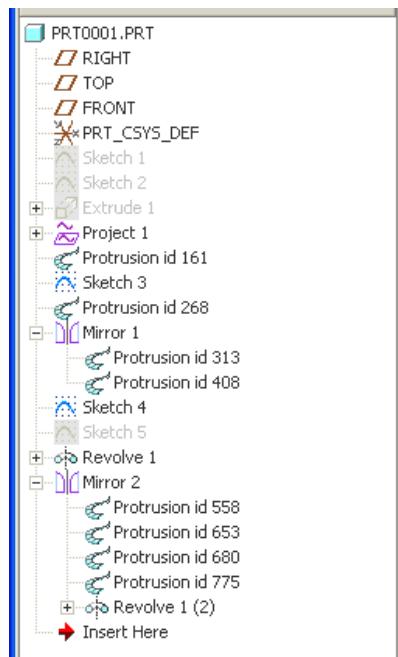

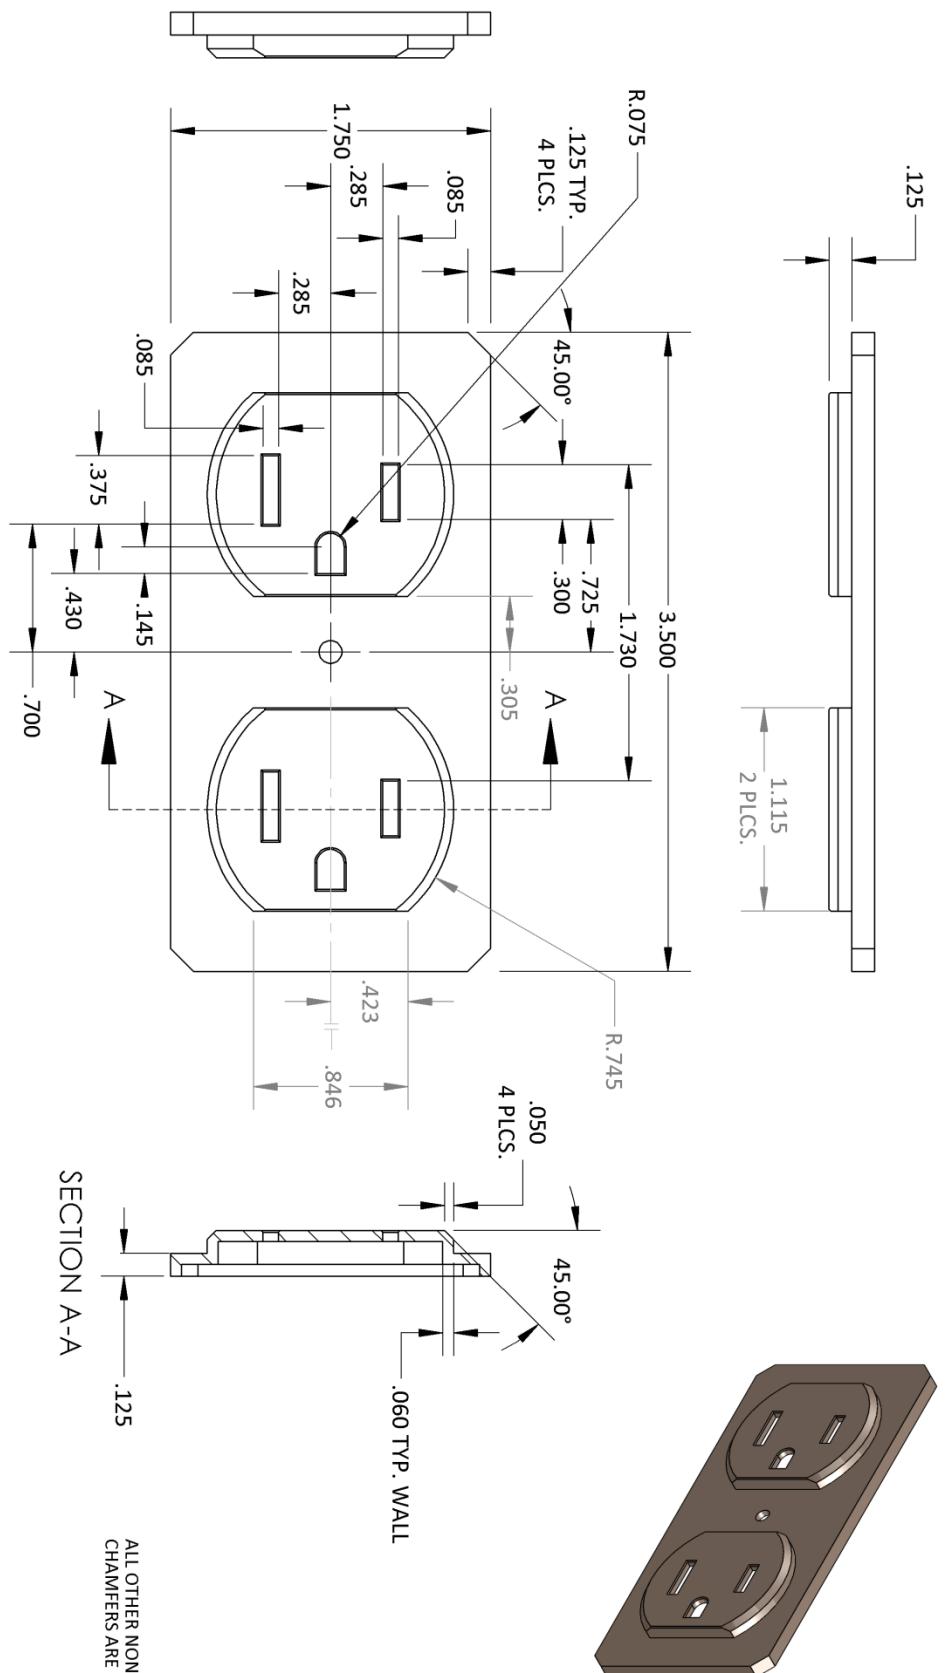

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
<INSERT COMPANY NAME HERE>. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
<INSERT COMPANY NAME HERE> IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE: <i>TURNER ELECTRONICS</i>
DIMENSIONS ARE IN INCHES	TOLERANCES:			
FRACTIONAL: ANGULAR: MACH ⁺ TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	BEND ± ENG APPR. MFG APPR.	DRAWN	CHECKED	
INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL	Q.A.			
NEXT ASSY	USED ON	COMMENTS:		
APPLICATION	FINISH			
DO NOT SCALE DRAWING				
		SIZE	DWG. NO.	REV
		A	<i>LAB 3d</i>	
		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1


EXERCISE 8

Swept Blend/Lofting

Swept Blends create a feature by making transitions between profiles. A Swept blend can be a base, boss, cut, or surface.



GOALS:

- Offset Planes
 - Splines
 - Swept Blends

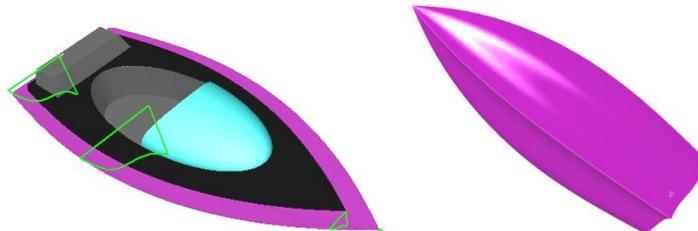


1. Create 4 datum planes beginning from the “Front” plane and offset from each other as shown.


DTM Plane 1 – 6.00”
DTM Plane 2 – 8.00”
DTM Plane 3 – 1.00”

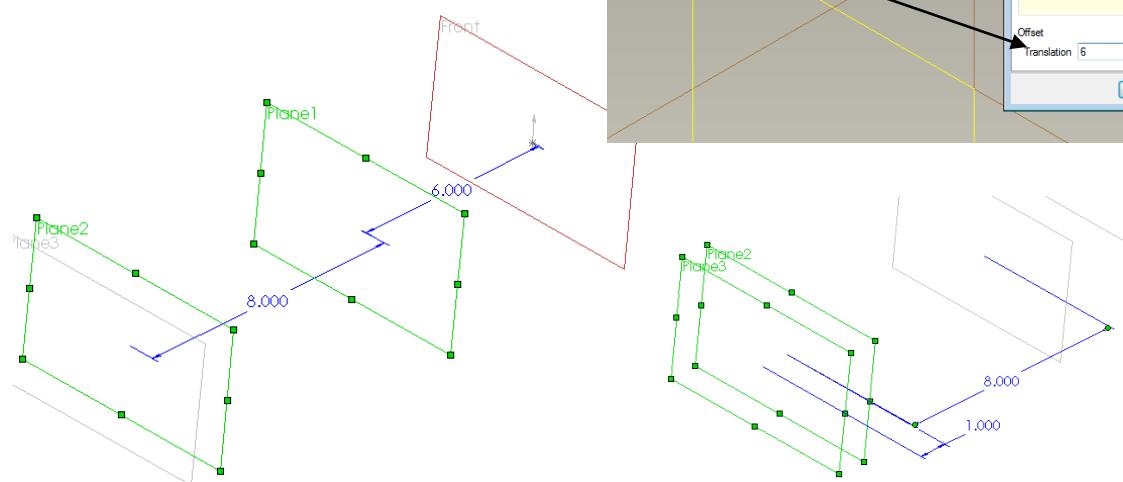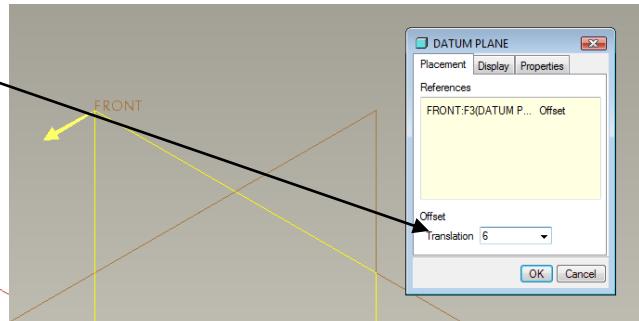


2. Sketch 1 on the “Front” plane should look like this... use the Spline tool.

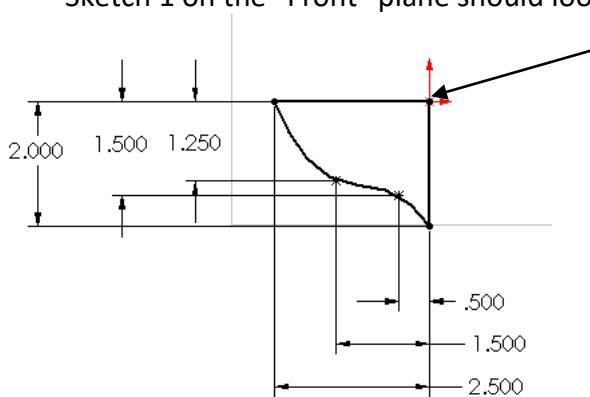


3. Sketch 2 on “DTM 1” should look like this...

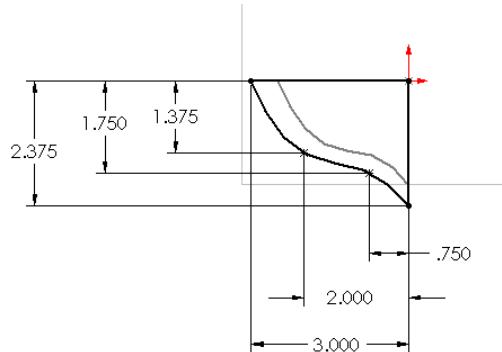


4. Sketch 3 on “DTM 2” should look like this...

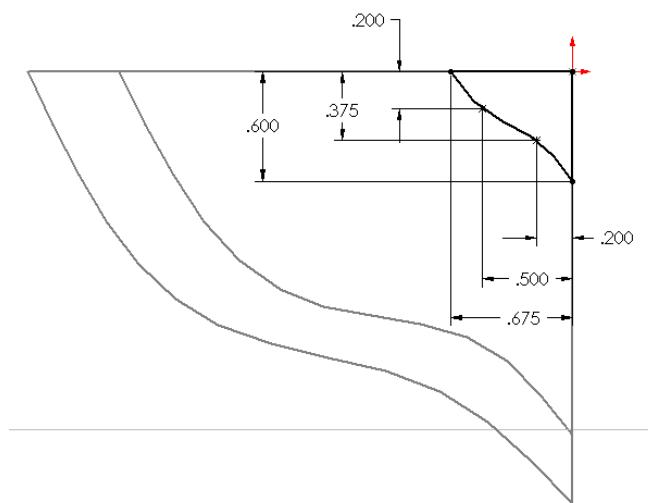


5. Sketch 4 on “DTM 3” should look like this... A (.010”) profile at the origin.

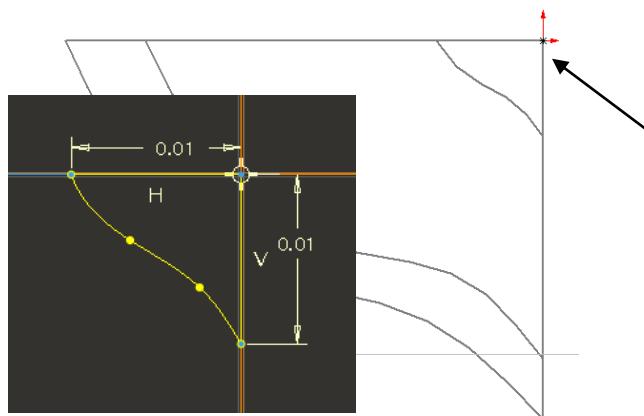


6. Select the Right datum plane ad draw a horizontal line at the origin and dimension it 15" long.

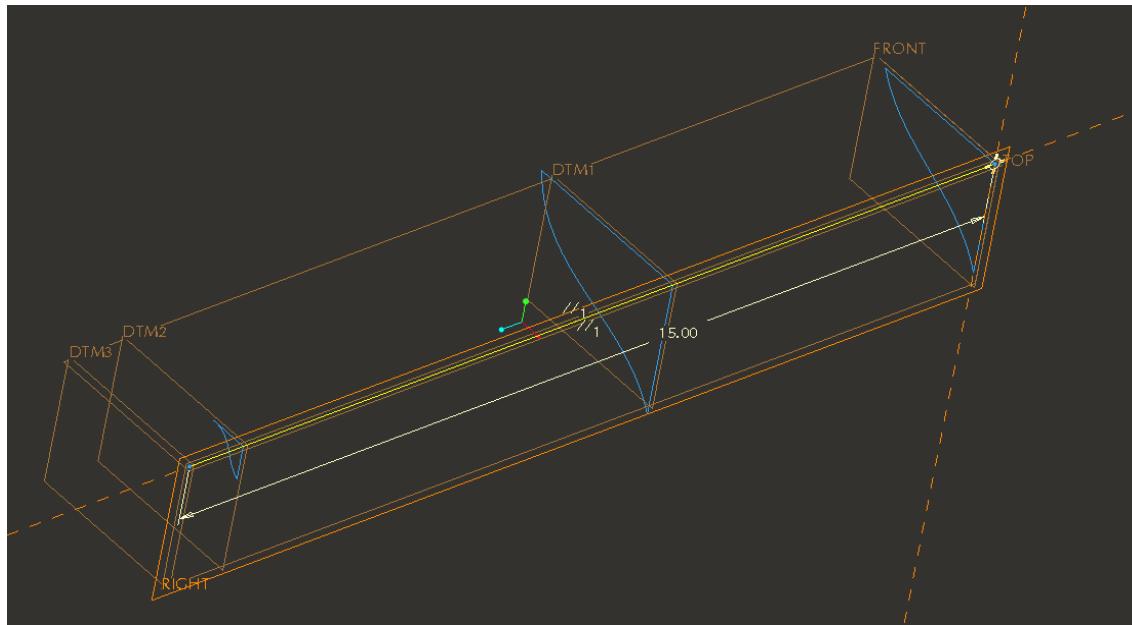


7. Swept Blend: Exit any sketches and select Insert/Swept Blend.

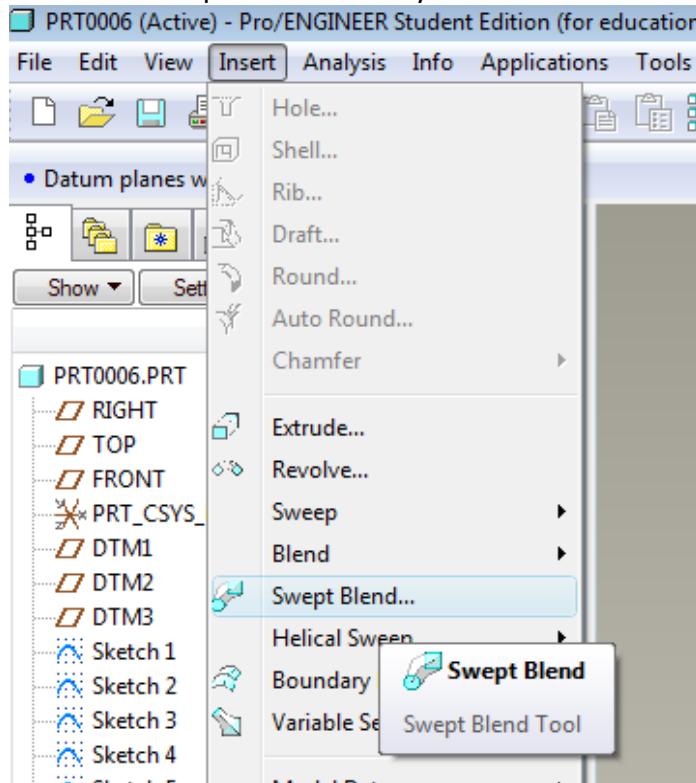


8. References Trajectories: Select the 15" line. Select the "Solid" option.

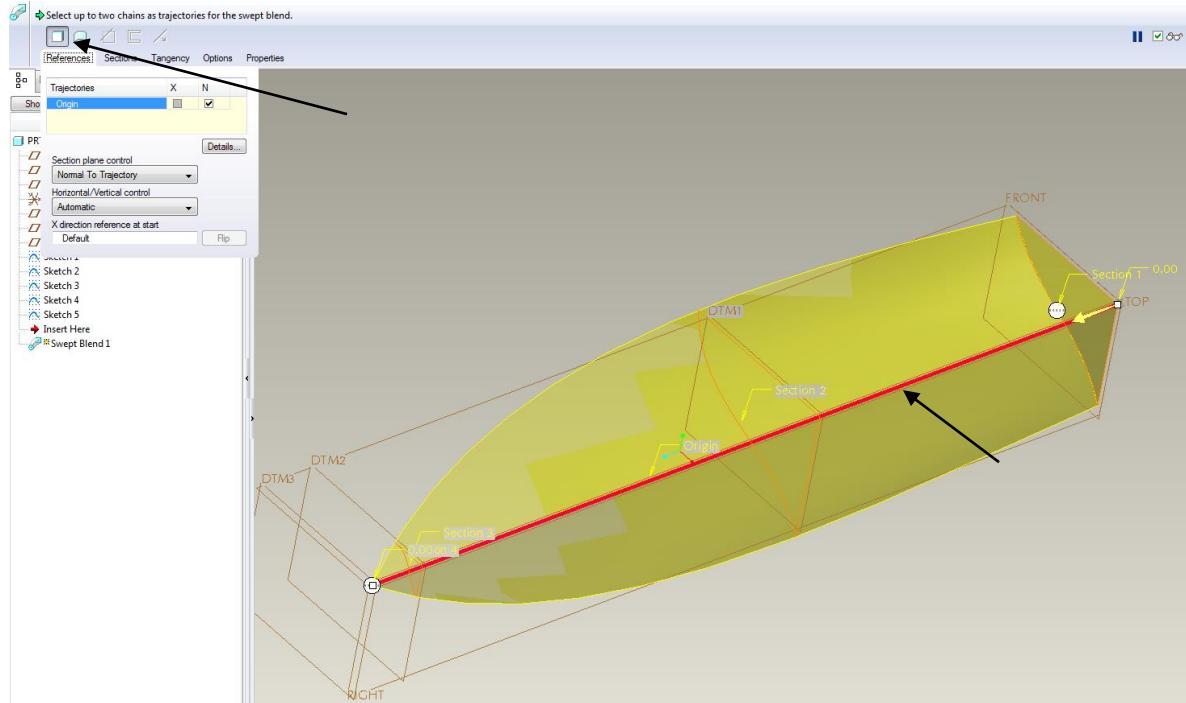


9. Sections/Selected Sections: Select the 4 sketches in order from back to front. Be sure to select the "Insert" button for every sketch to be entered.

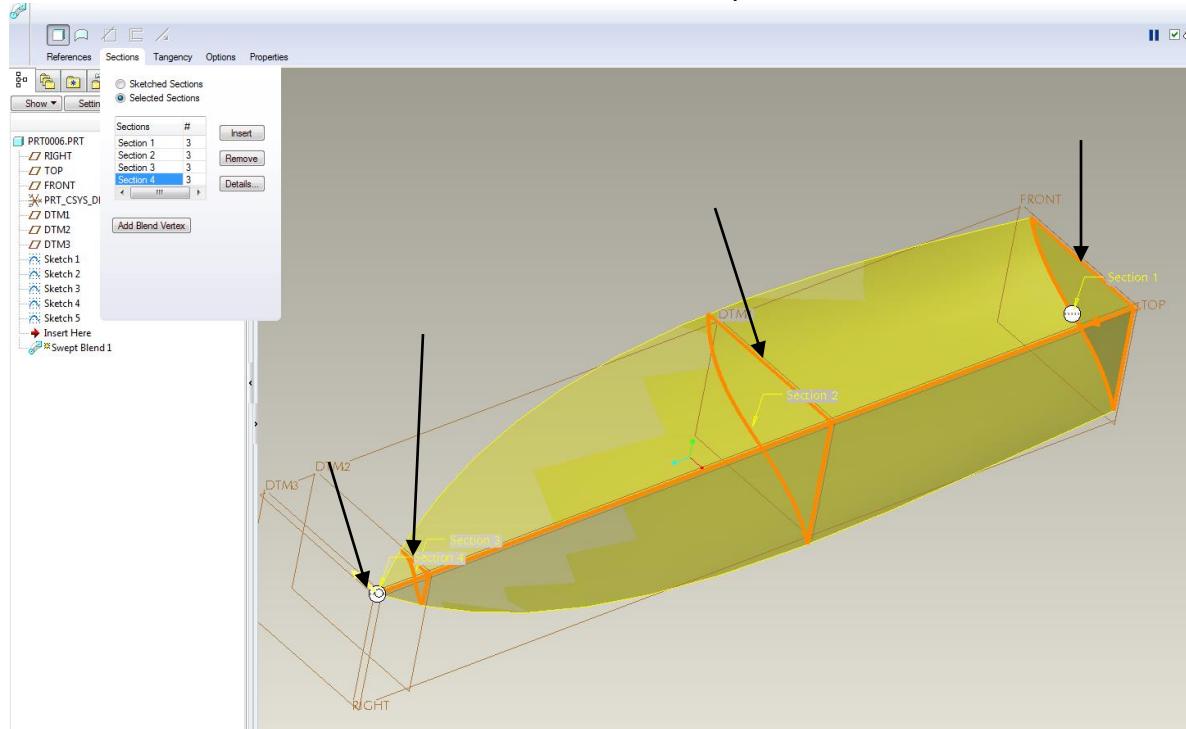

10. You should have $\frac{1}{2}$ a boat hull now...

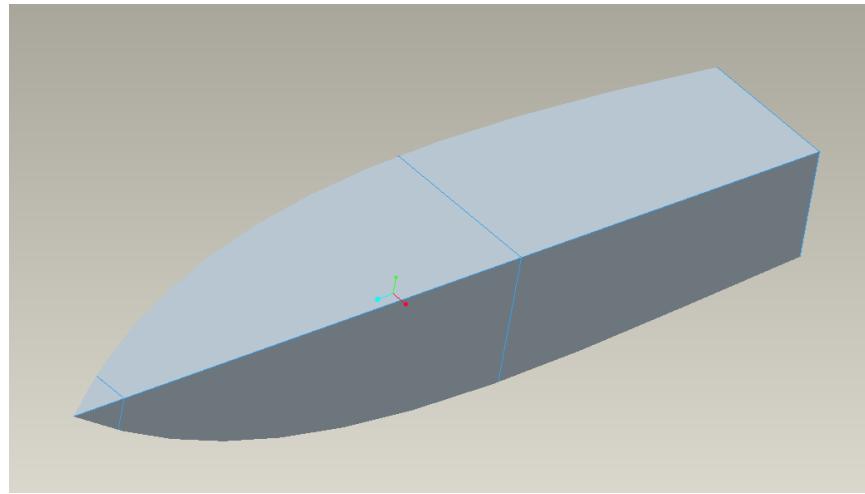


11. Use the Mirror feature and select the flat side face as the plane to mirror from.

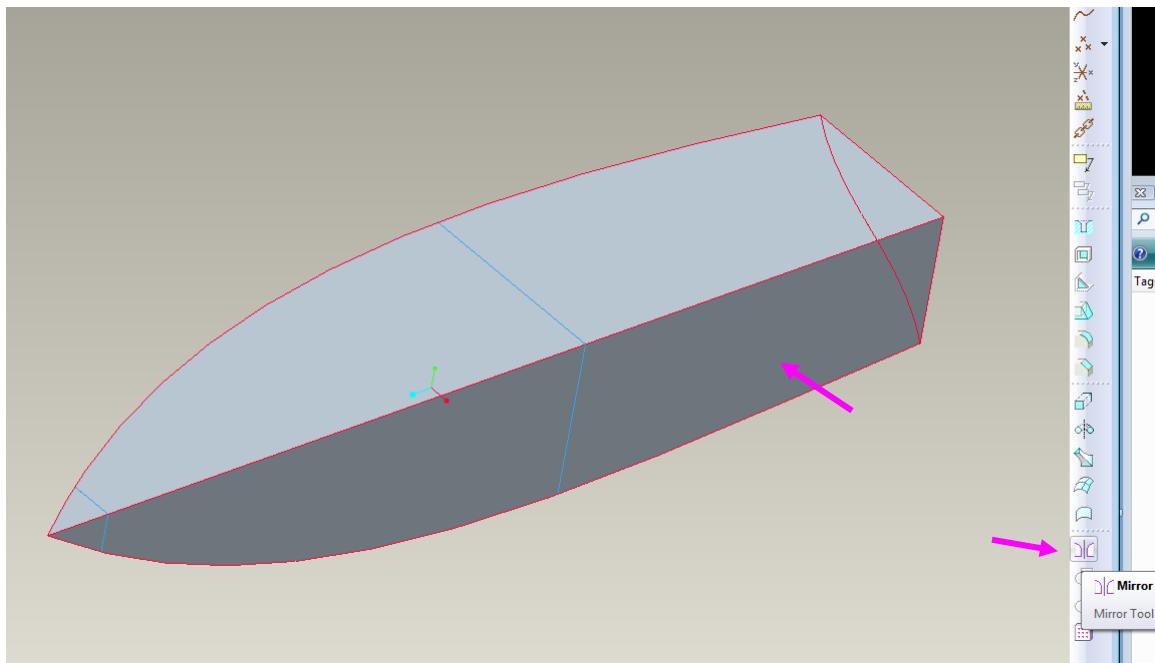

12. Select the hull one more time and hit the green check mark to apply.

13. You are finished with the boat Hull.

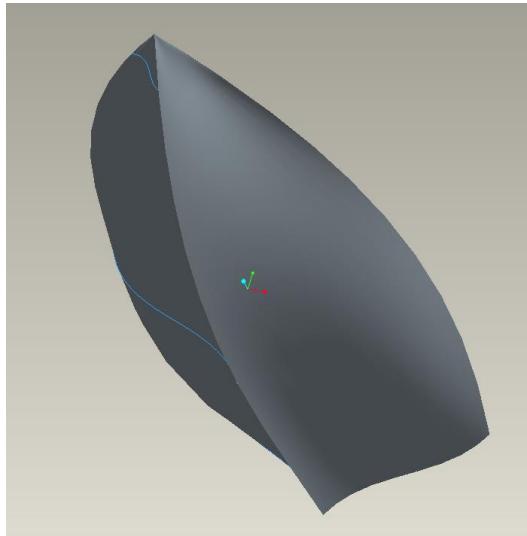



14. (Optional) Now dress it up for the contest...



MODEL NAME
PRT0001


TITLE

1

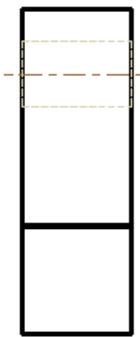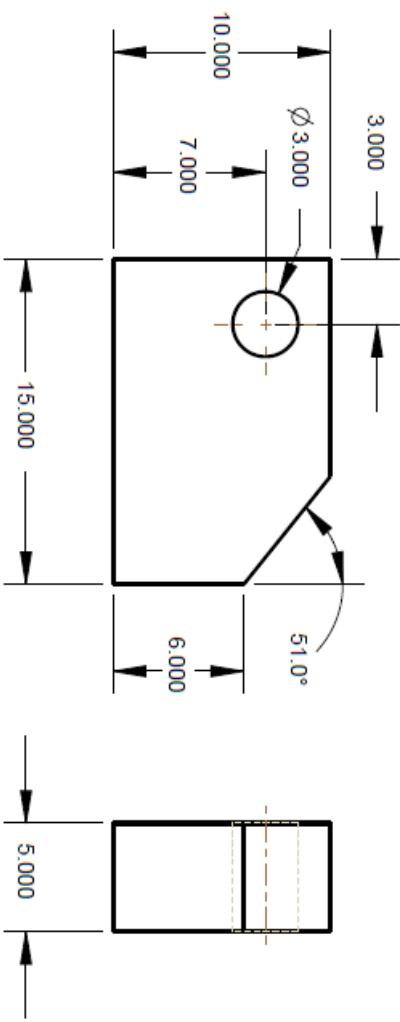

2

INSTRUCTIONS:
MODEL THE PART AND
RECREATE THE DRAWING

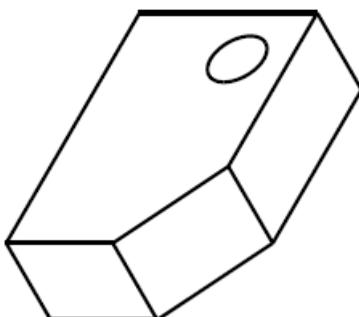

DO NOT SCALE

L8	
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES. XX.X = 11 XX.XX = 0.01 XX.XXXX = 0.001 ANG = 1°	DRAWN BY _____ CHECKED BY _____ APPROVED BY _____ SCALE 1:8 SHEET 1 OF 1
PROJECT _____	MODEL NAME PRT0001
ISSUE _____	


EXERCISE 9

Top-Down Assembly Modeling


Top-Down Assembly Modeling is creating parts inside an assembly.

GOALS:

- Understanding Top-Down Assemblies
- Projecting Sketches
- Inserting New parts
- Exploded Views

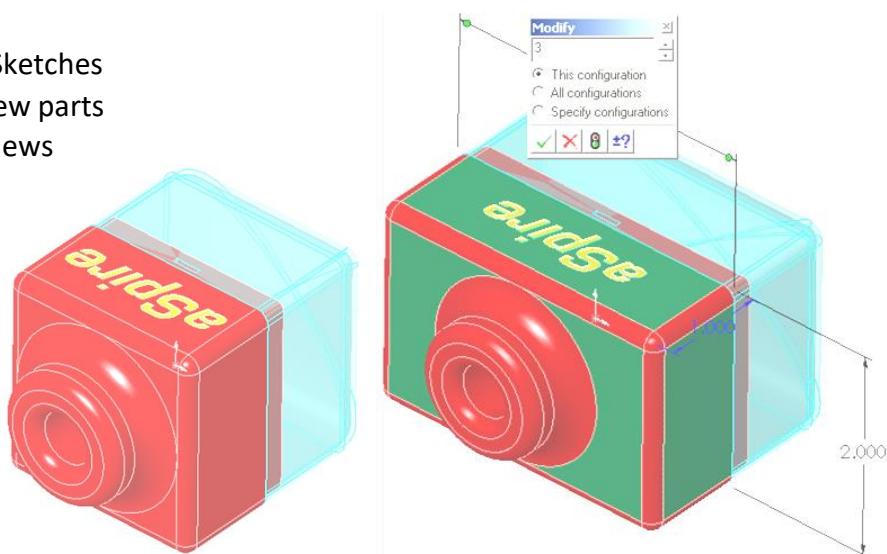



1. Create a new assembly file.
2. Go to the Create icon.
3. Save it as E9_Front and drop it on the “Front” plane. Create the following part from the drawing.

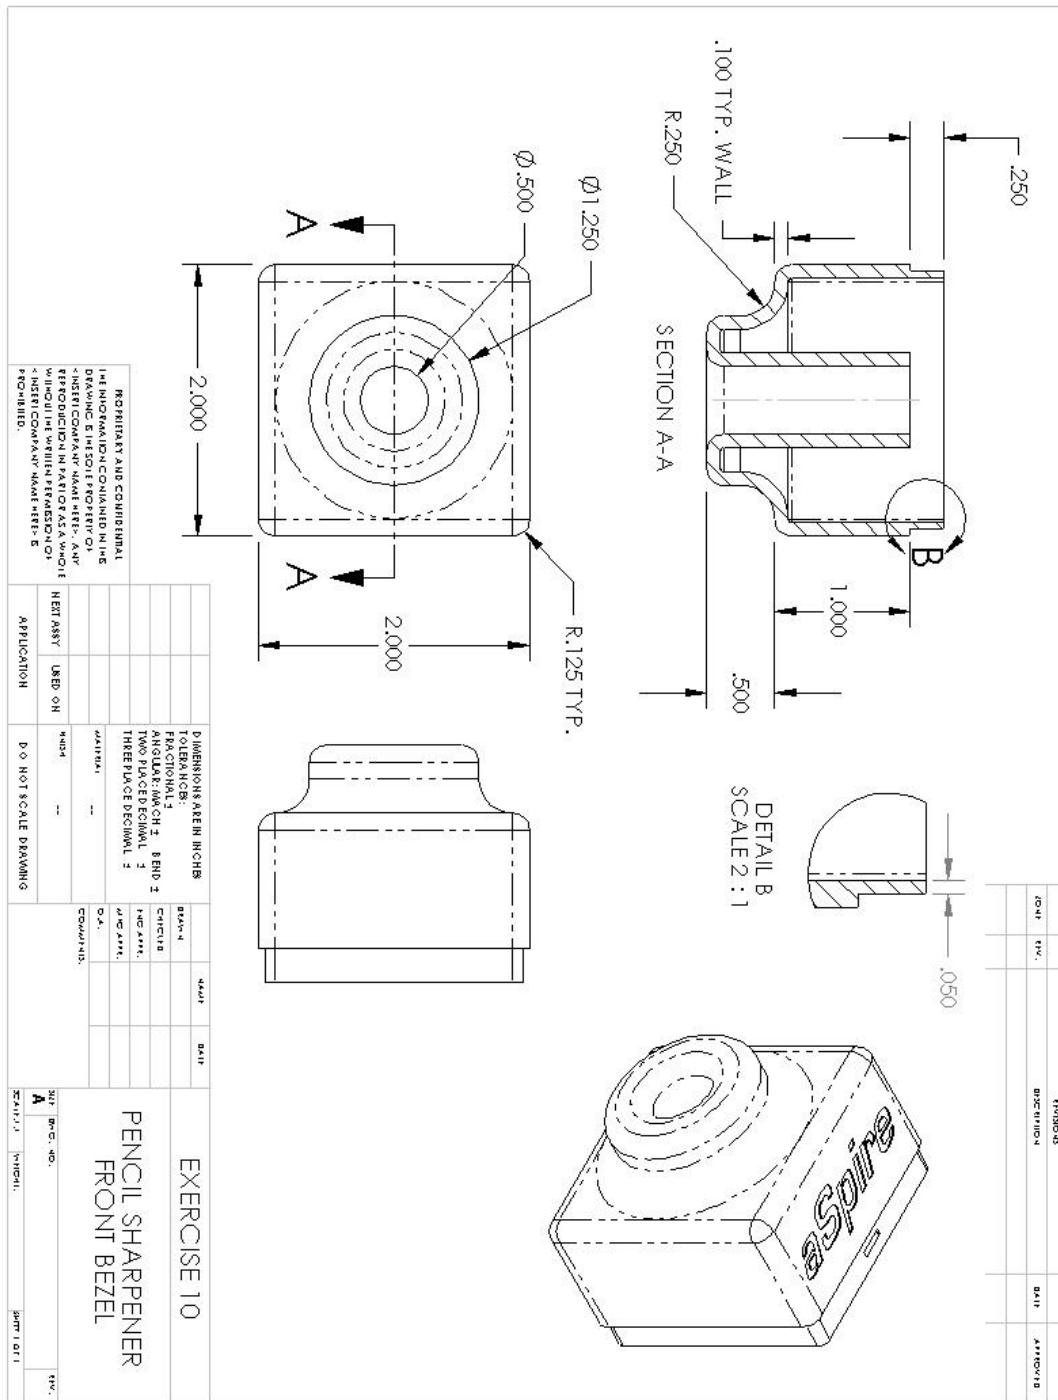

4. When finished select the **Activate** option to exit part editing mode.
5. Insert another new component and save it as E9_Reservoir.

6. Create the following model in the context of the assembly-using offset or convert entities from the E9_Front model.

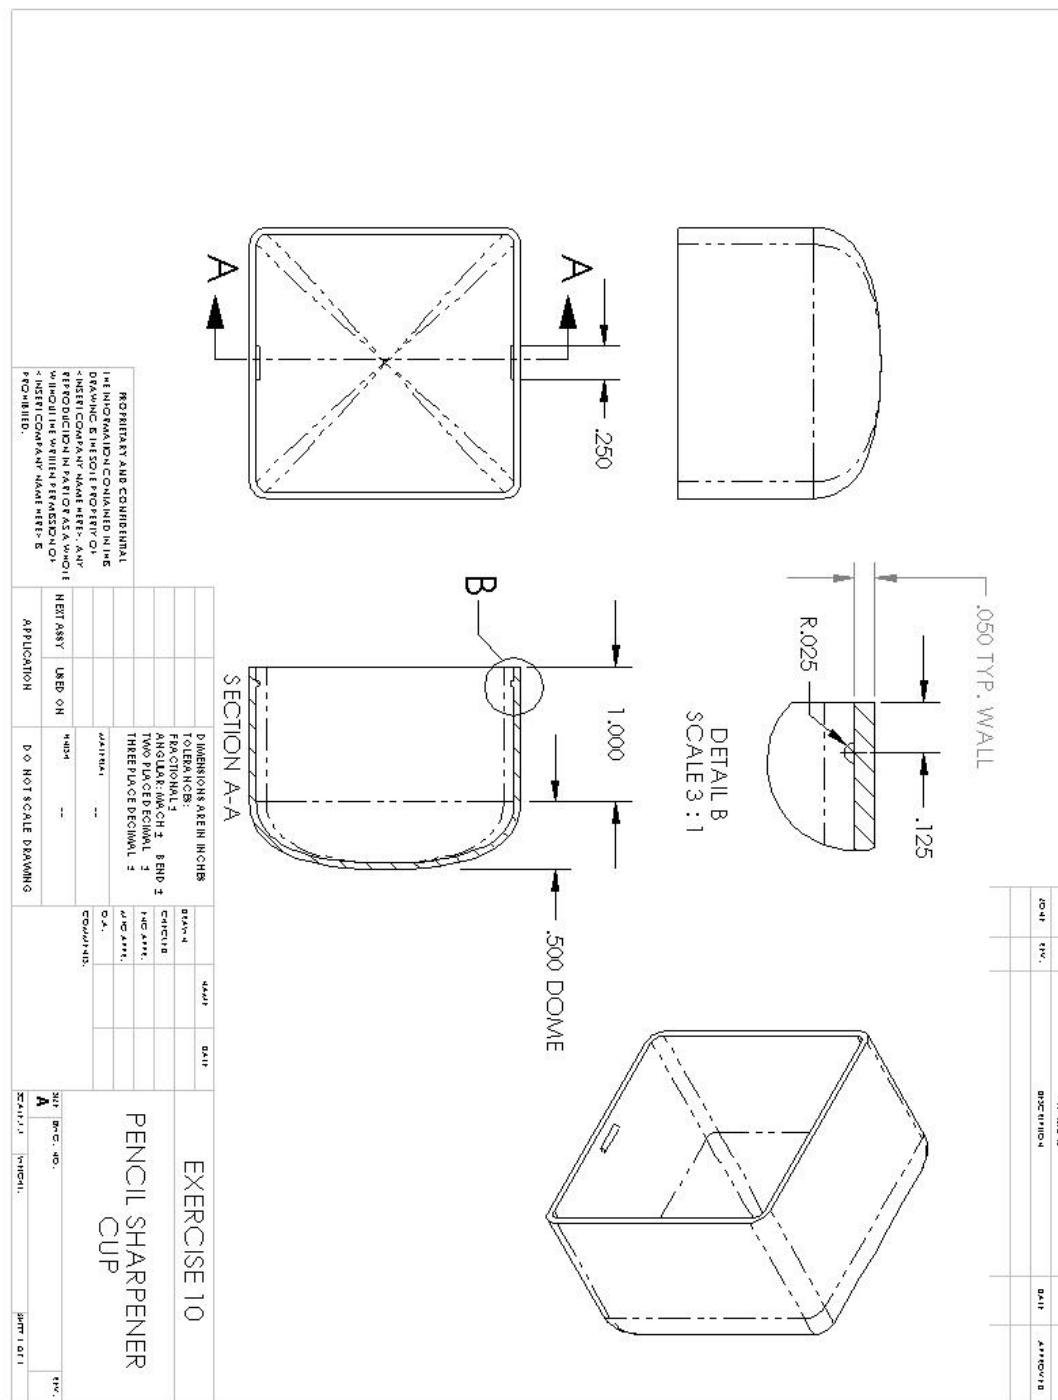


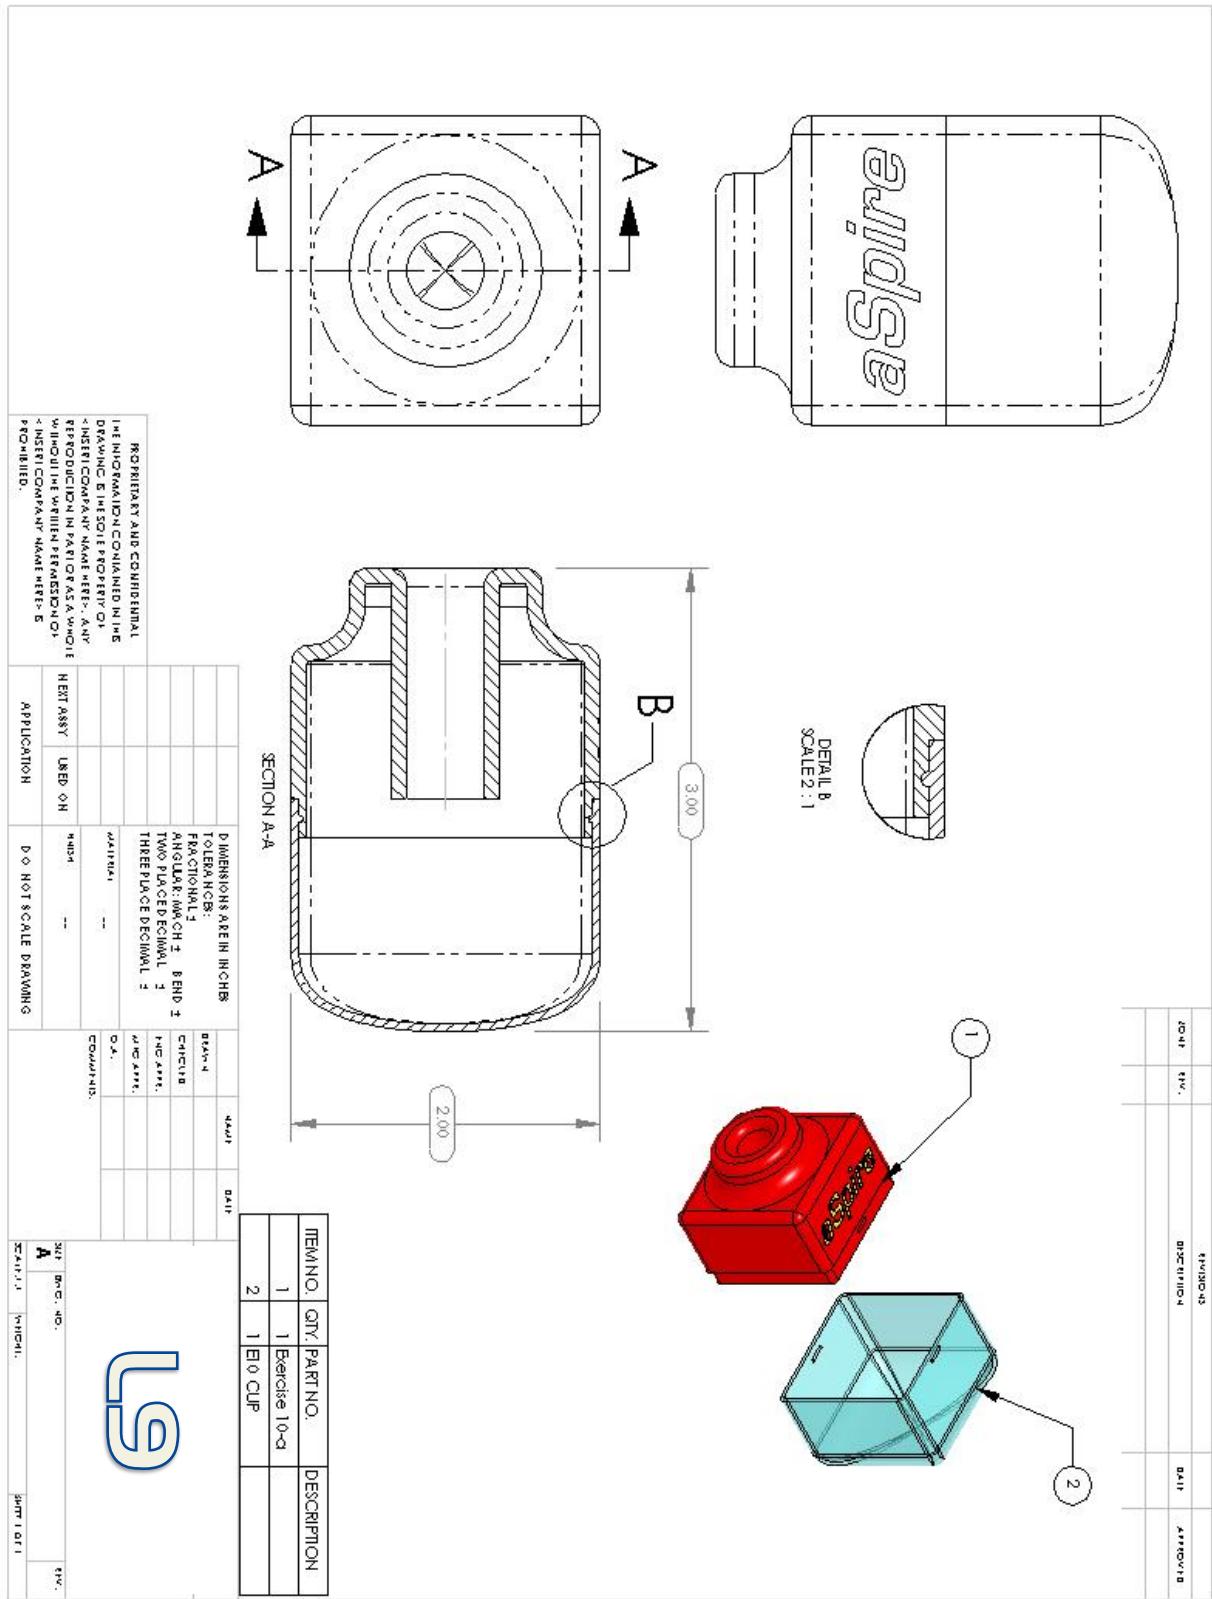

EXERCISE 10

Assembly Editing


This exercise will include both **Bottom-Up** and **Top-Down Assembly Modeling**.

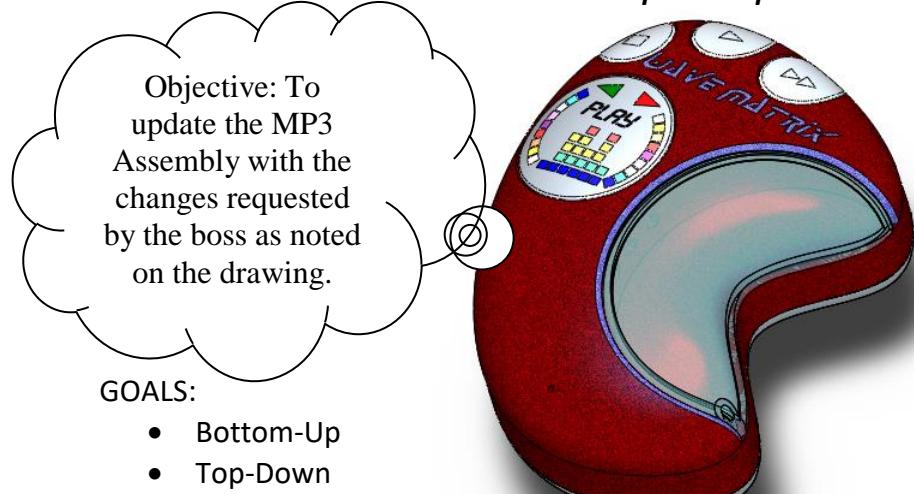


7. Open the file called E10_asm assembly and modify according to the instructions noted on the drawing provided. You will have to mate the Battery part file.



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	Original		1
2	Front Bezel		1
3	Rear Bezel		1
4	CD		1
5	Button Array		1
6	PCB		1
7	AA Battery		1
8	Ear Phone Case		1

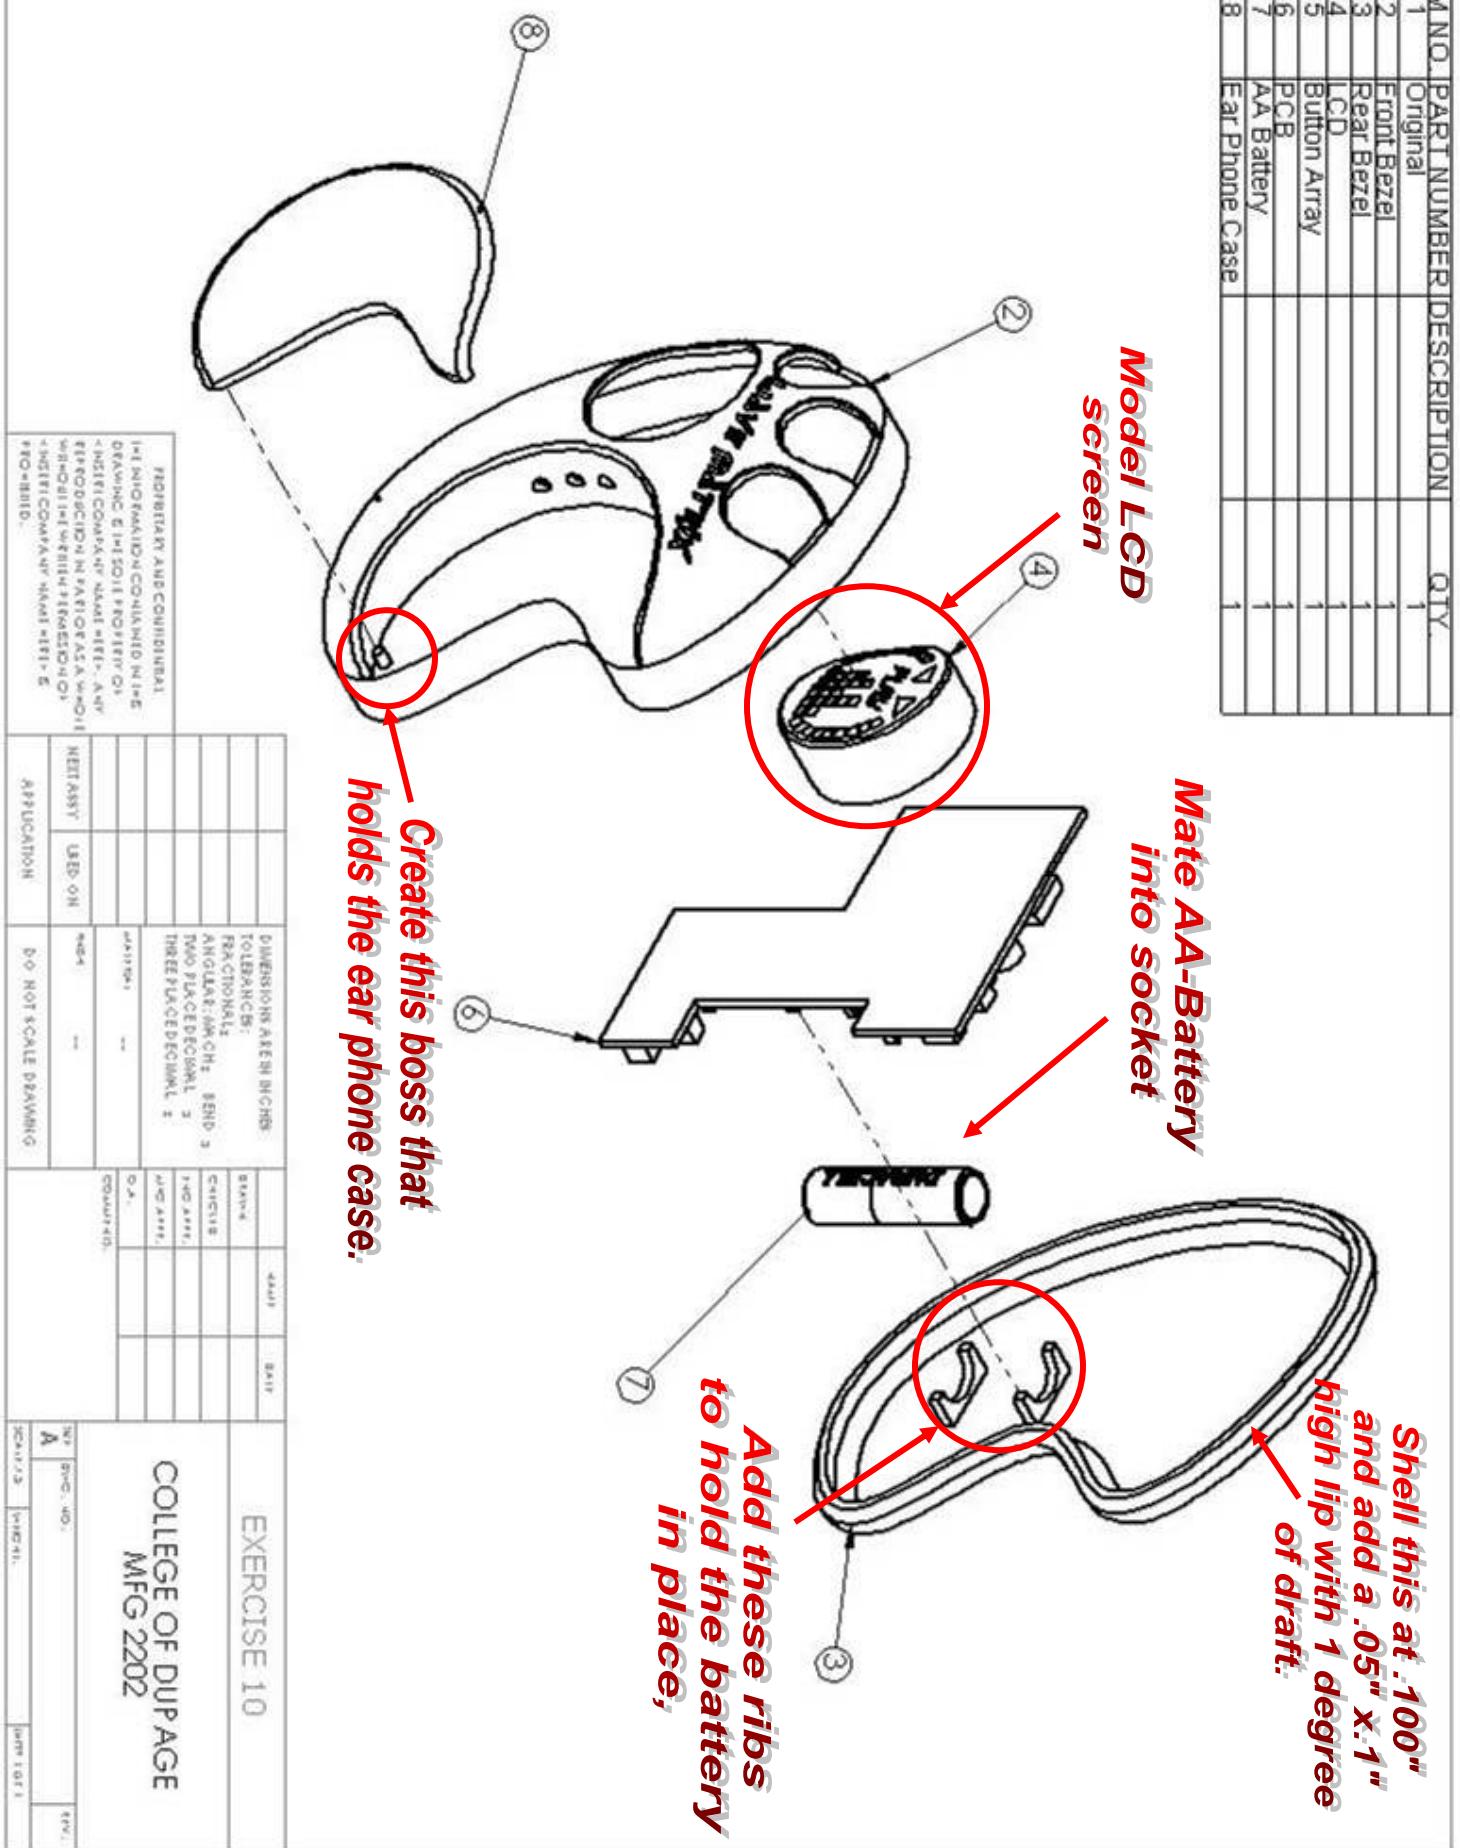

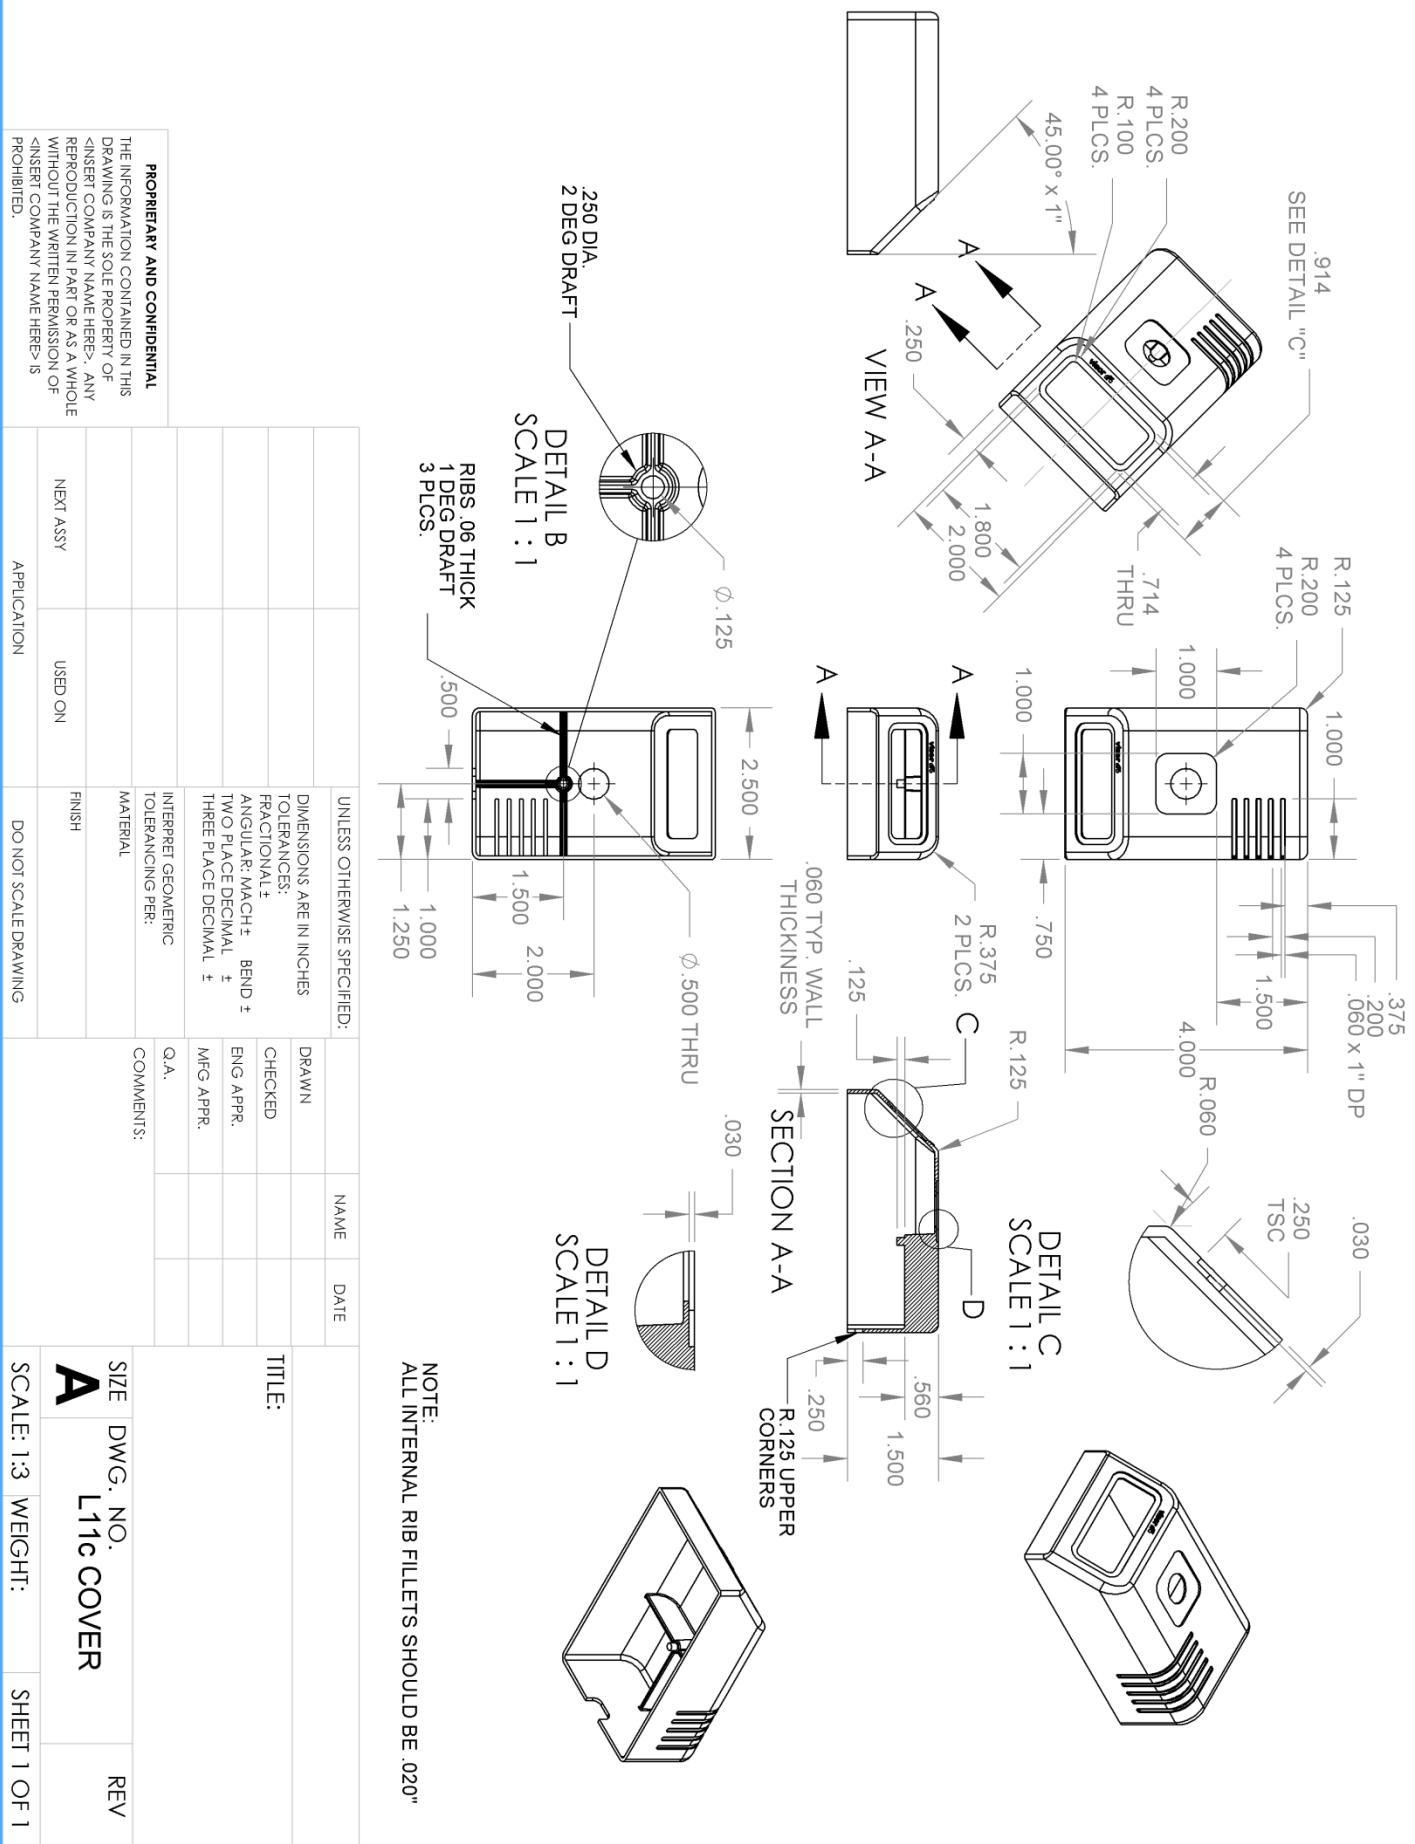


EXERCISE II



Sheet Metal Design

Sheet Metal part files can be very useful for extracting a flat pattern.


GOALS:

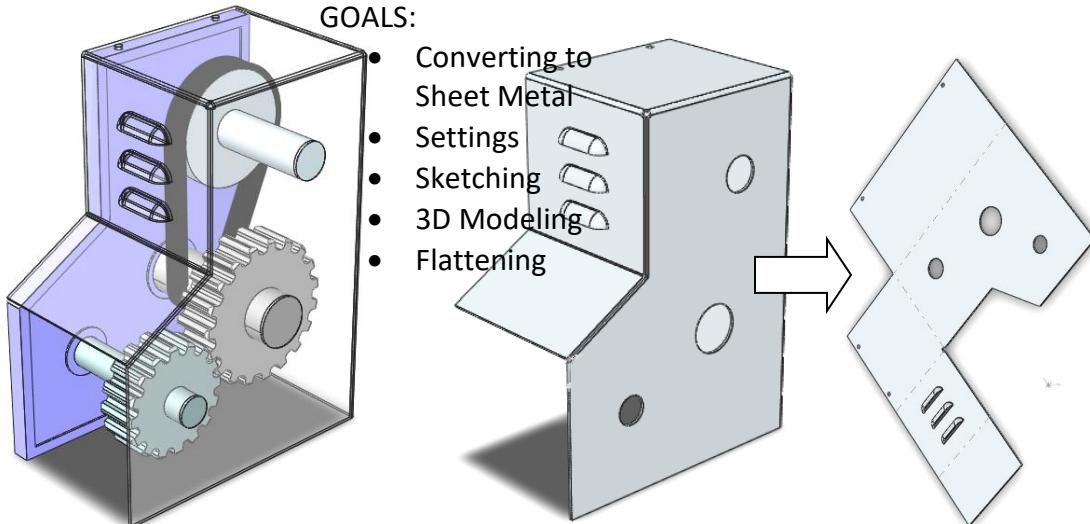


1. Go to file/open and select E11 for file type and locate "Gear Enclosure".

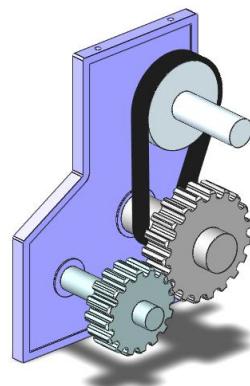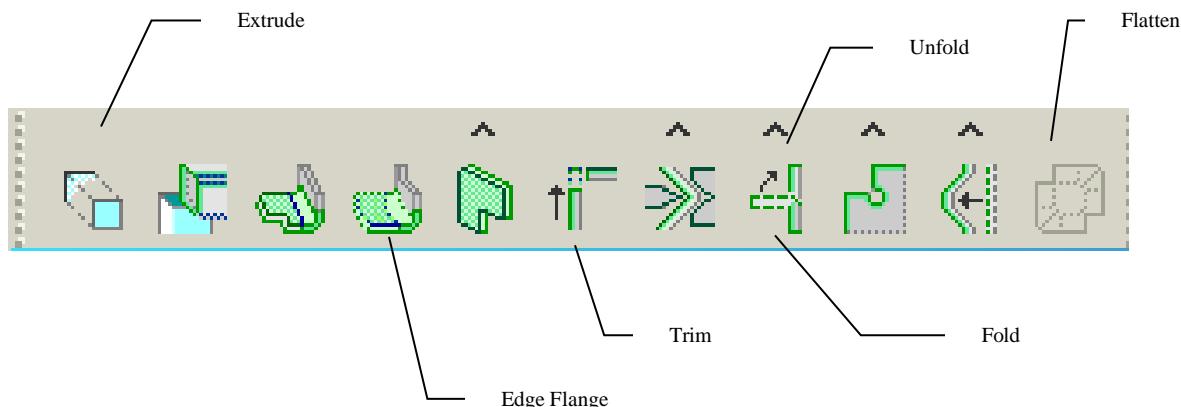


2. Insert a new part into the assembly; drop it on the end face of a gear shaft of the assembly. Name it "Cover 2" (This will be the enclosure) then select the front outside face. Convert Entities. "Offset"

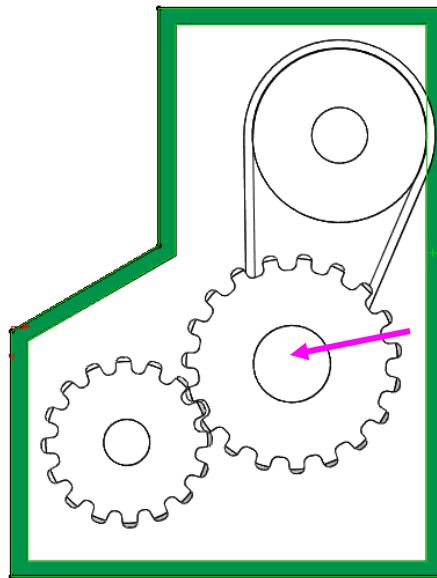


3. Extrude up to vertex.


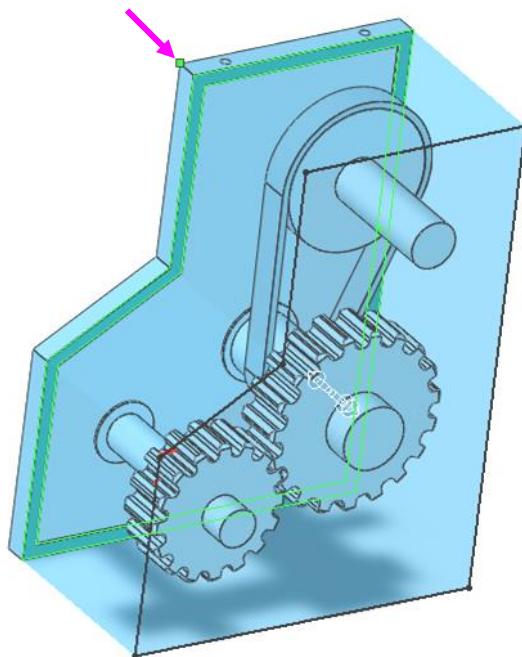





- Once completed the assembly should look like this. Right Mouse click on the surface of the enclosure and select “open”.

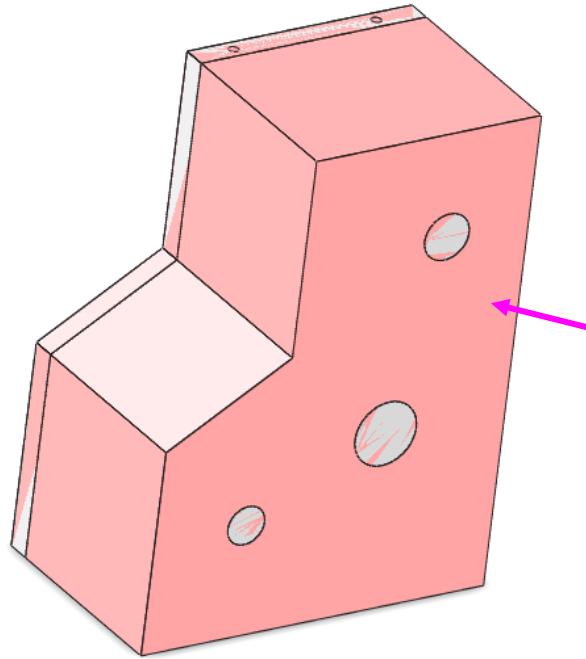

- Convert to sheetmetal Go to an isometric view and “ctrl” select the four faces as shown.

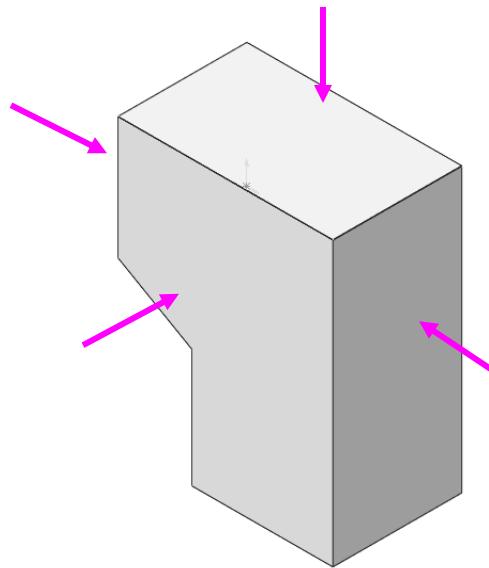


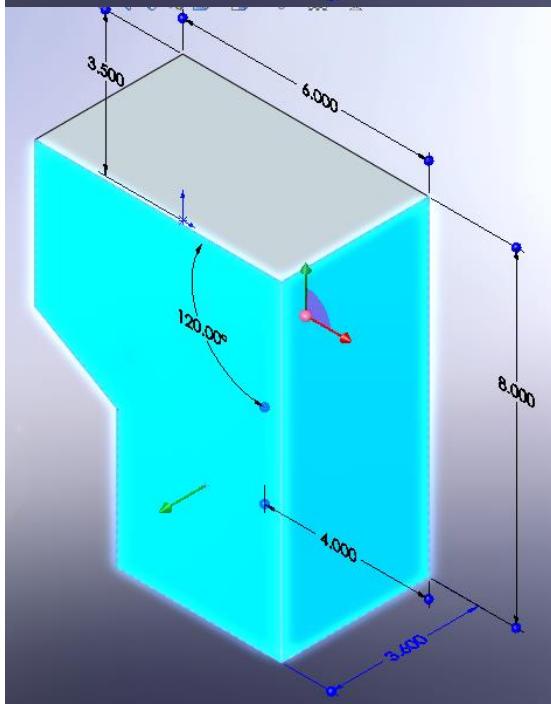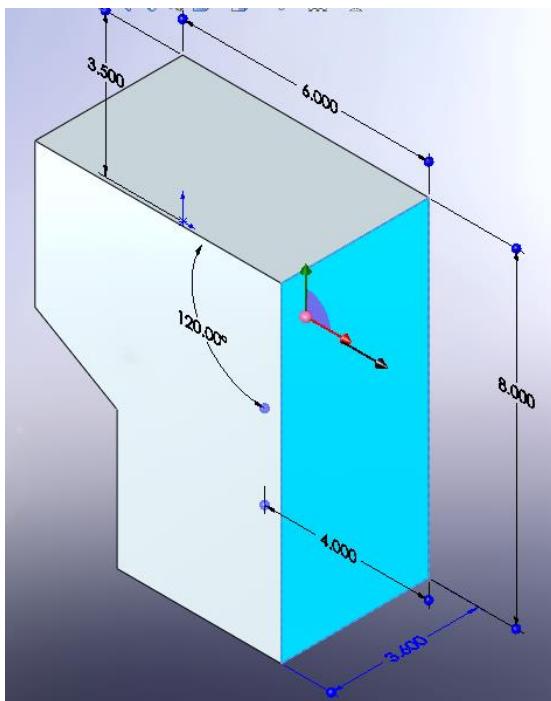

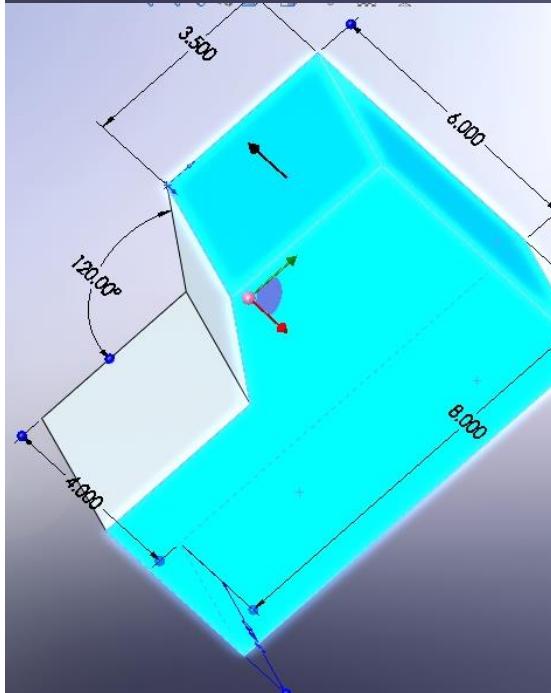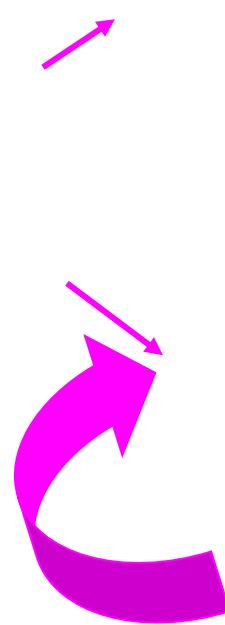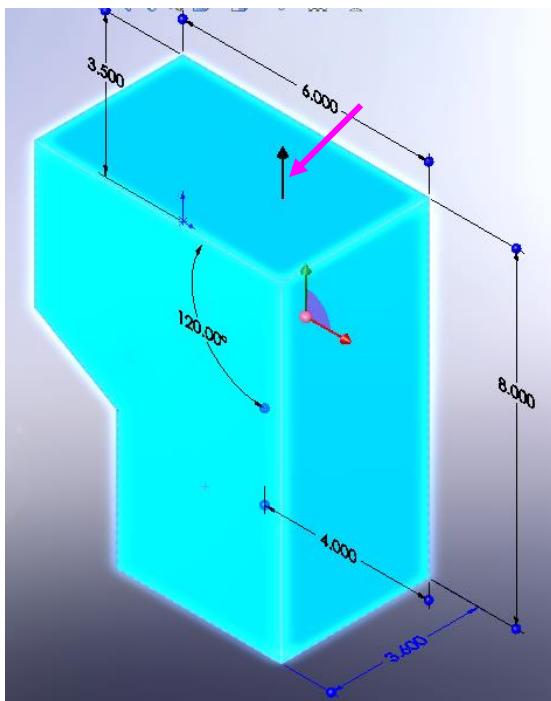


Rotate the view to select the fourth face.


6. To convert to a sheet metal part, select the pull down menu “Application/Sheet metal” select the “shell” option.

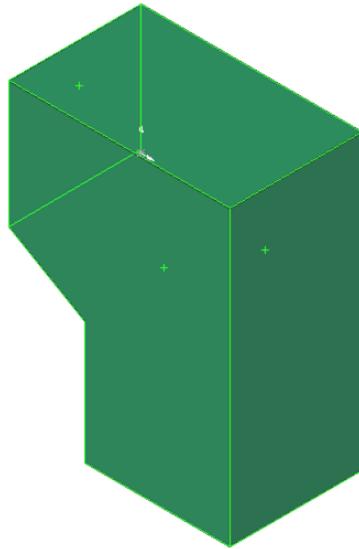


6. Select the bottom face and select the “Conversion” icon.

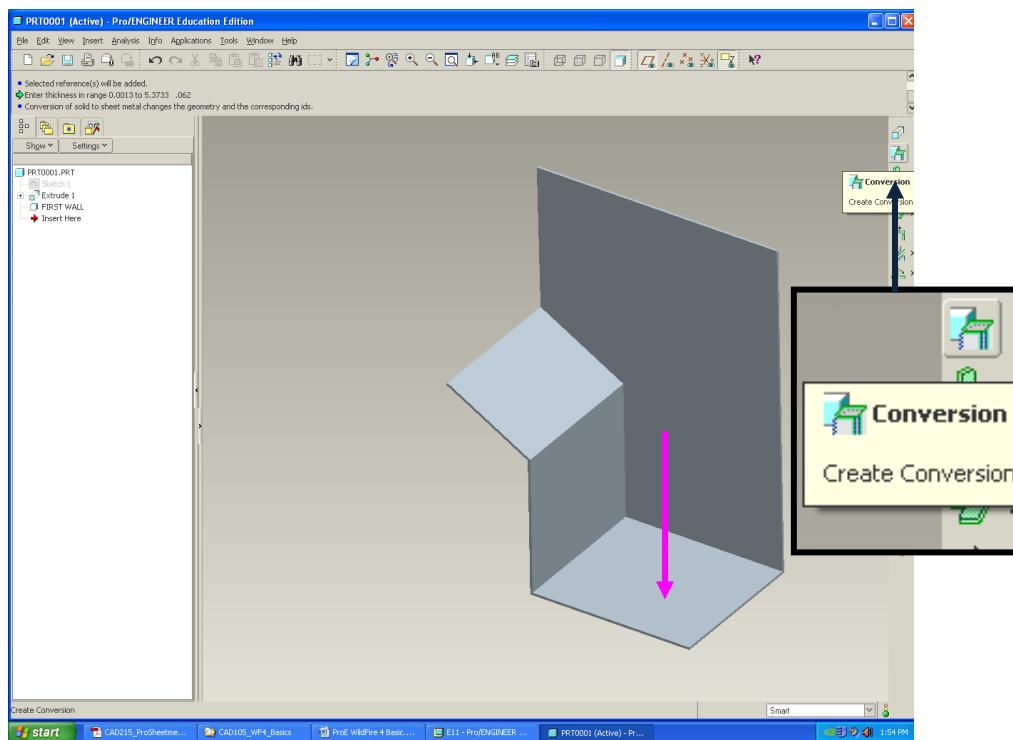


7. Go to the right view orientation and you should have this section view...

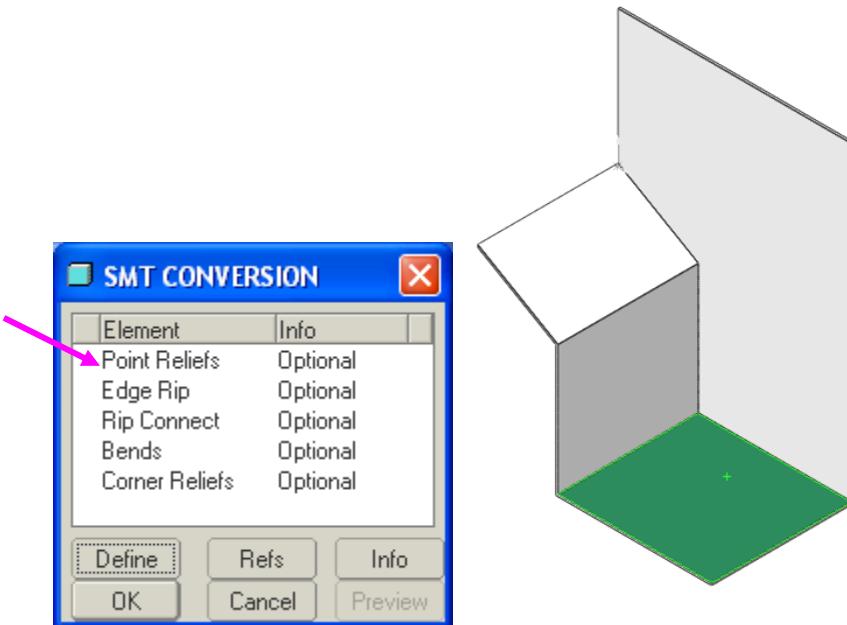


8. Click on the Rip parameters and select the two inside edges. Hit apply.

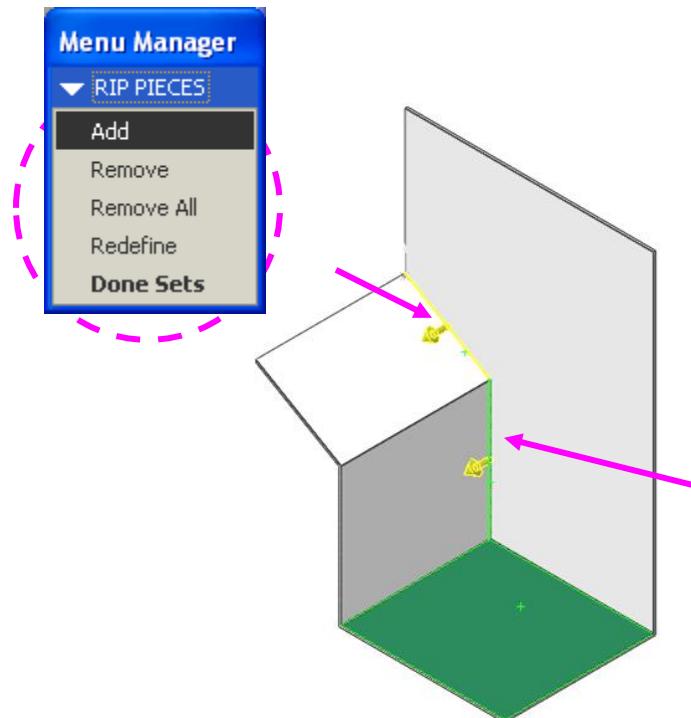


9. Double click on “Bends”. Hold the CTRL key while selecting. Hit done and OK.

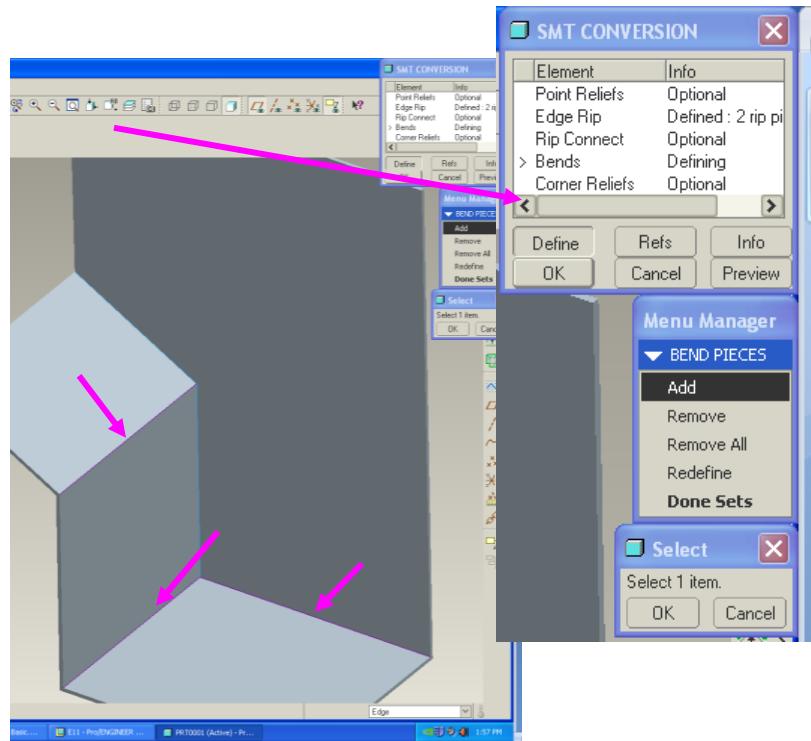


10. Select the flatten icon.

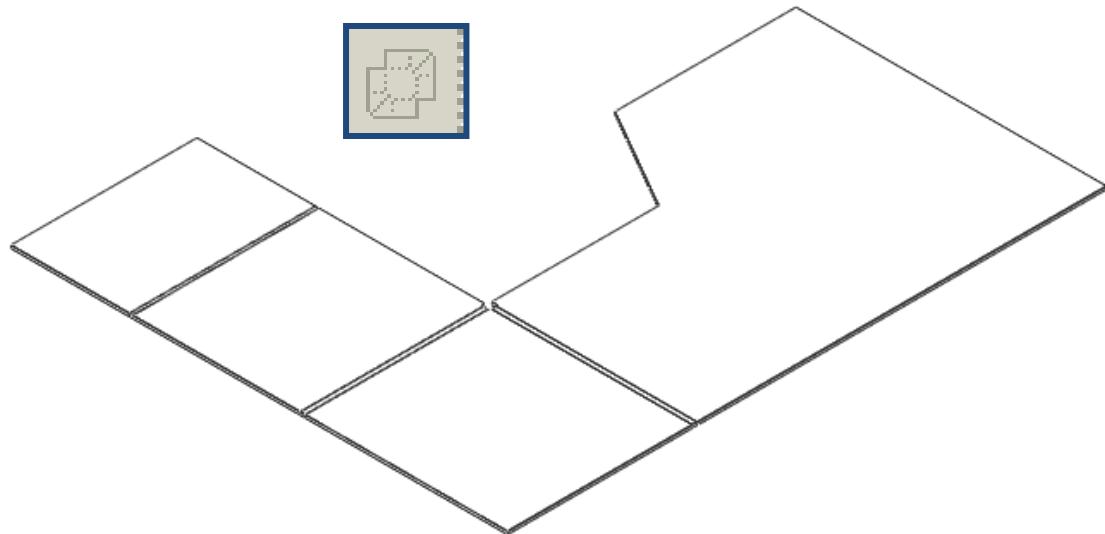

12. Return to the assembly.

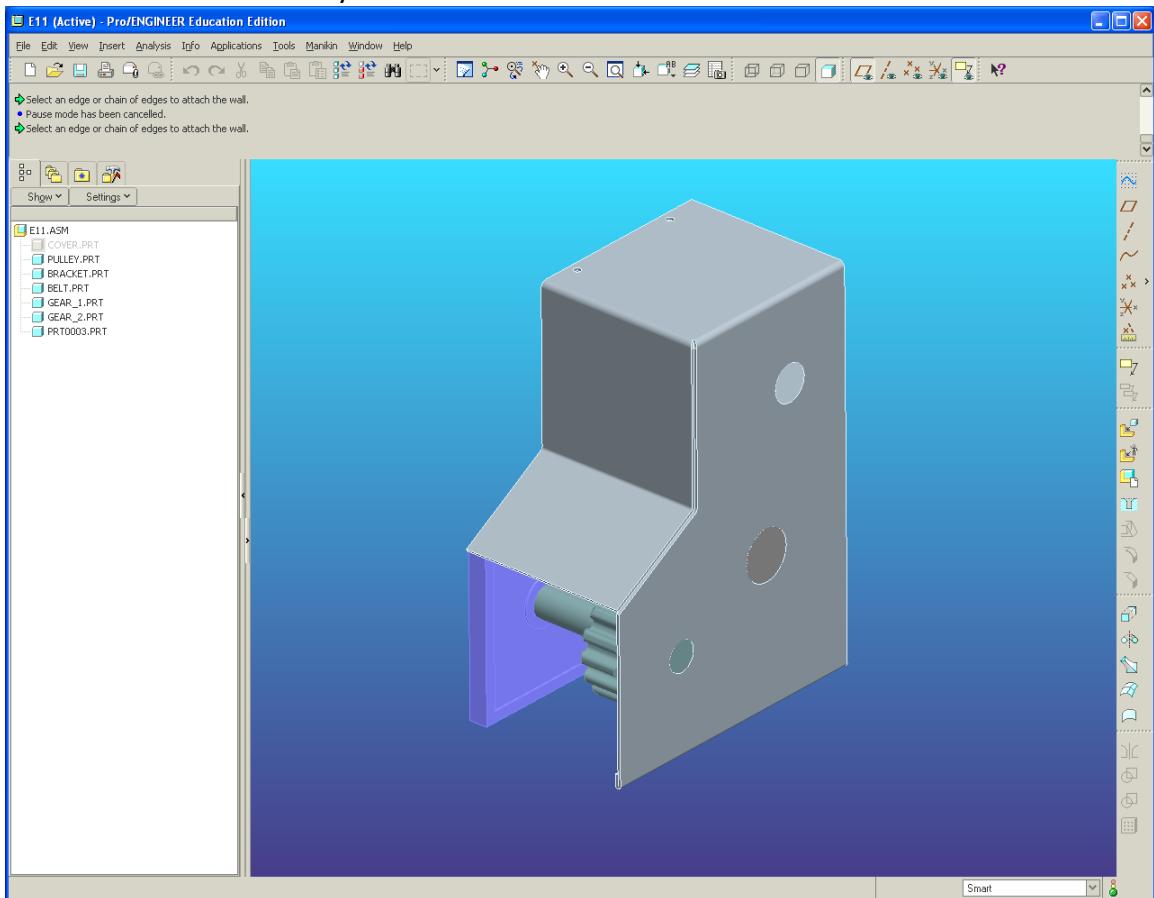

13. Add holes and additional features.

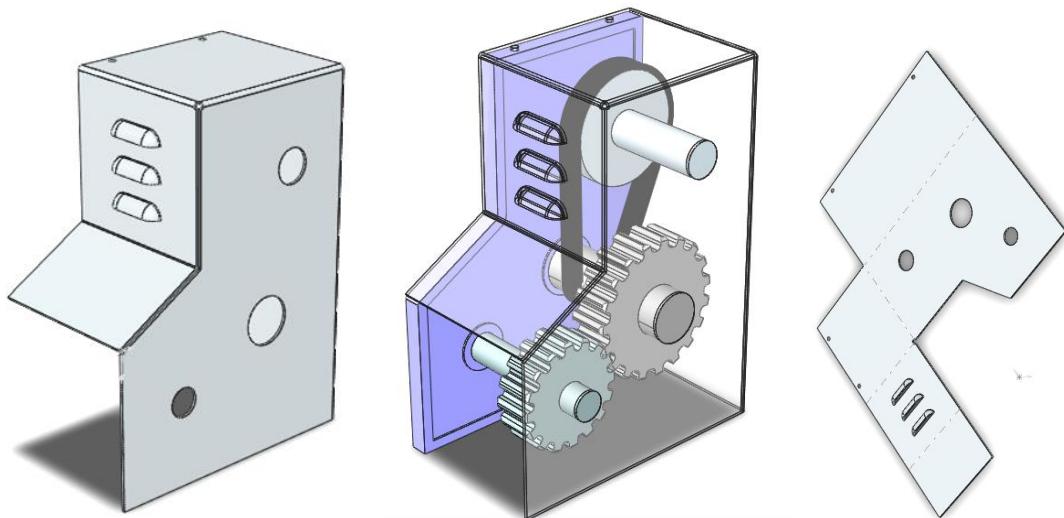

14. The enclosure is now completed.


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

		TOLERANCING PER: MATERIAL
ASSY	APPLICATION USED ON	FINISH
		DO NOT SCALE DRAWING

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: ANGULAR: MACH \pm TWO PLACE DECIMAL \pm THREE PLACE DECIMAL \pm
INTERPRET GEOMETRIC TOLERANCING PER:
MATERIAL

SECTION A-A

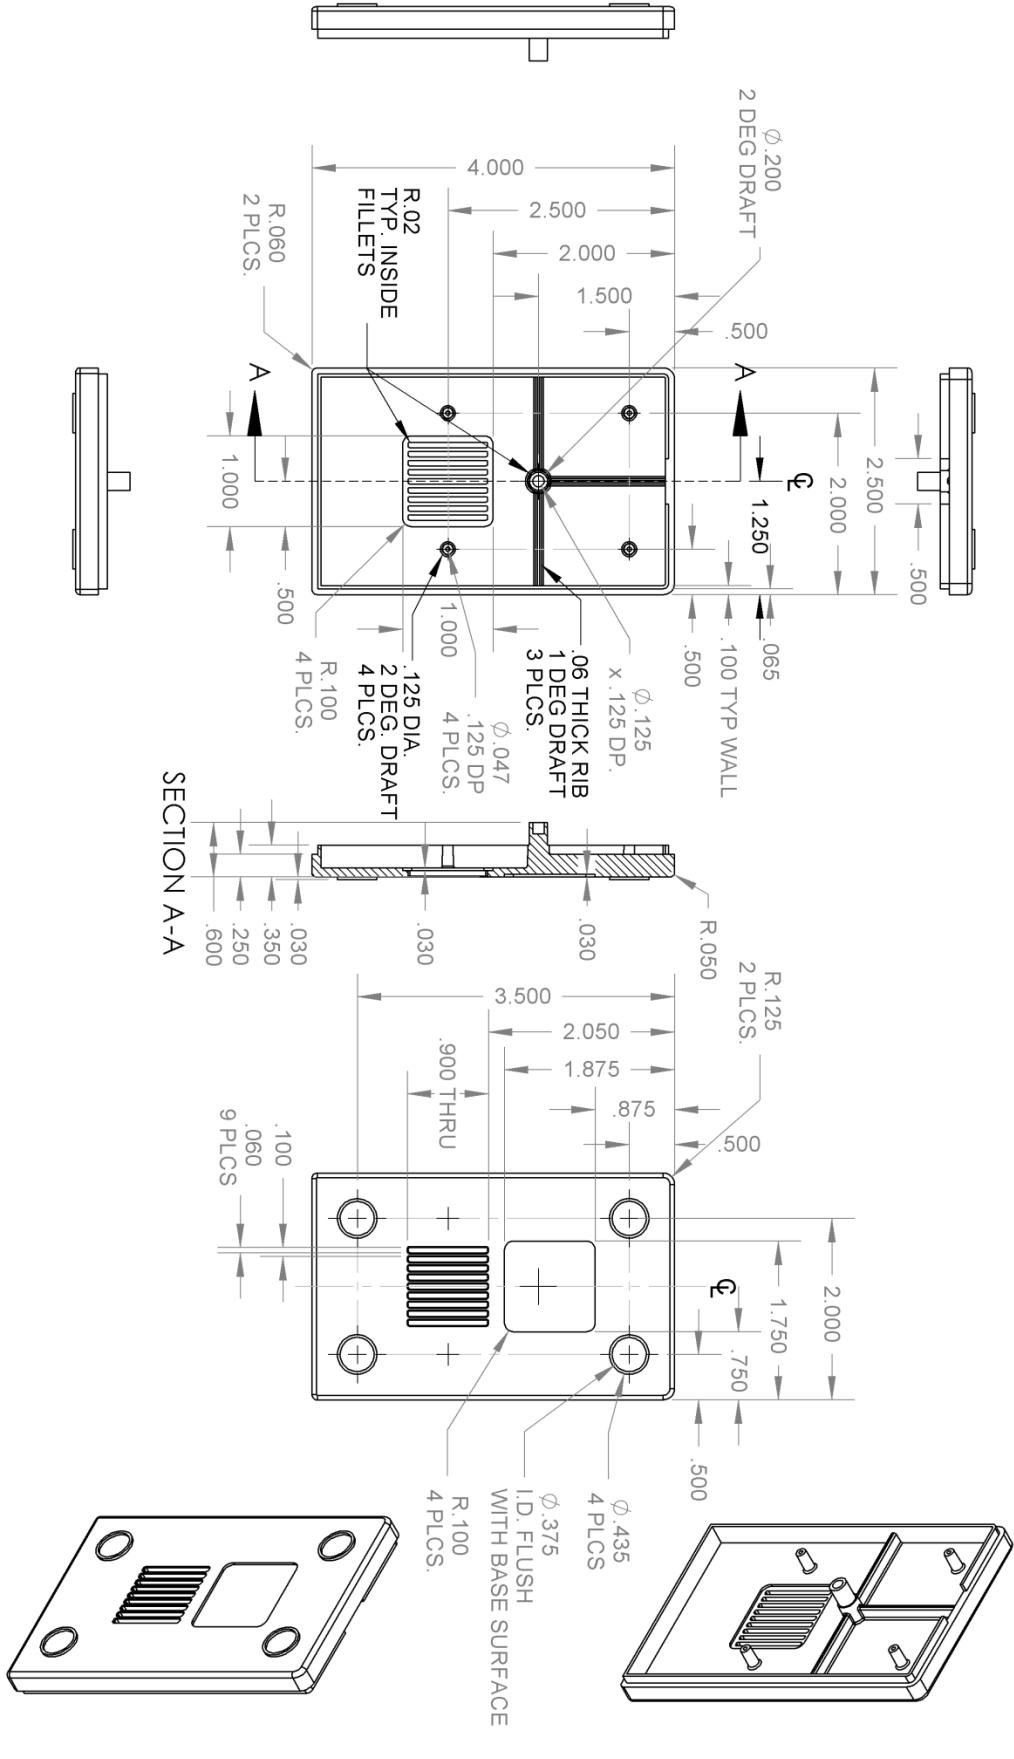

BONUS INFORMATION

ProE Creo Administration

Finding adequate computer hardware to run Creo may be challenging, this lesson looks at the multiple aspects of selecting hardware as well as modifying settings inside Creo to allow it to run efficiently and trouble free.

Selecting an Operating System (OS).

Windows 10 64 Bit

Windows 32 Bit support ended with Creo Parametric version 3.0.


Processors (CPU)

Intel

Atom
Celeron
Pentium
Core i3
Core i5
Core i7
Core i9
Xeon

AMD

Athlon
Ryzen 3
Ryzen 5
Ryzen 7
Ryzen 9
Epyc

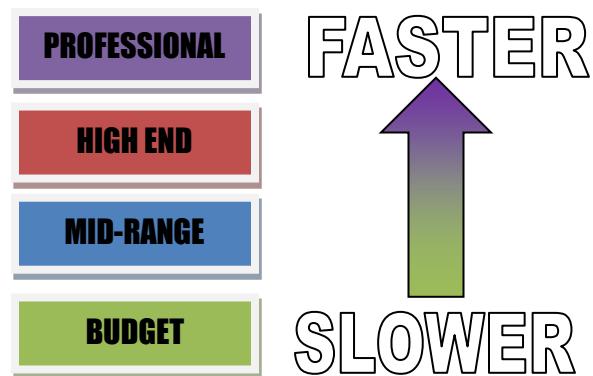

Multiprocessing

Most CPU manufacturers are beginning to deliver multiple core processors. This can be seen with the AMD Thread ripper which currently has up to Sixty-four processing cores.


Which one will run Creo fastest? You can find benchmarks at

<https://www.cpubenchmark.net/>

The question is: “Can Creo benefit from multiple cores?” Currently one might find an average of 10 – 15% performance increase with general modeling. This is because Creo is not fully written to take advantage of multithreaded processes. However, using the Creo Simulation, CFD, or Photolux rendering solutions one may discover 2x – 128x faster performance versus a single core processor. This is because these Creo applications do take advantage of multithreaded processing.

The biggest benefit one might find is the ability to multitask while working with an FEA analysis. This is a long process and you could actually open up another window of Creo or Outlook and continue working while the analysis is running with little slow down in performance.

To check out what your computer has inside without opening the case download the free version of CPUID – CUP-Z <http://www.cpuid.com/softwares/cpu-z.html>
Or ctrl-alt-del and start task manager to see how many threads your CPU has, as well as how much RAM.

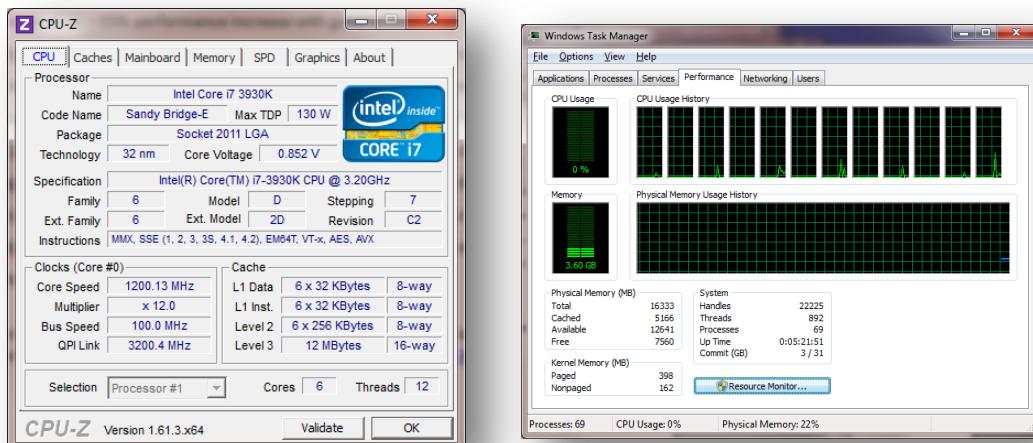

Graphics Cards

Here are a few brands that are in the Professional Category and actually have specific drivers that are written to run Creo at its best.

- **NVIDIA Quadro** series (not NVS series)
 - **Quadro P620 - Entry Level**
 - **Quadro P4000 – Mid-Range**
 - **Quadro RTX – Ultra High End**
- **AMD RadeonPro** series (not FireMV series)
 - **RadeonPro WX 3200 Entry Level**
 - **RadeonPro WX 5100 Mid-Range**
 - **RadeonPro WX 9100 Ultra High End**
- **Intel Xeon**
 - **P4000 HD integrated graphics** (*must be P = Professional rated*)



These cards are considerably more expensive than mainstream cards but the benefits of experiencing less crashes or visual problems with Creo outweigh the cost.

If you are using Creo at work, **DON'T SKIMP!** Buy a professional grade video card. For home use, the nVidia Geforce or AMD Radeon series are finer, but you may experience some graphical issues with larger assemblies.

GPU Benchmarks: <https://www.videocardbenchmark.net/>

MEMORY (RAM)


4.0 – 128 GB From simple machined parts to complex assemblies. The more RAM the better.

Bonus EXERCISE 3B


Family Tables

Family Tables enable you to create multiple part configurations derived from a single part file.


GOAL: Learn how to make multiple part configurations within a single part file.
In this exercise we make a cast and machined version of the ratchet.

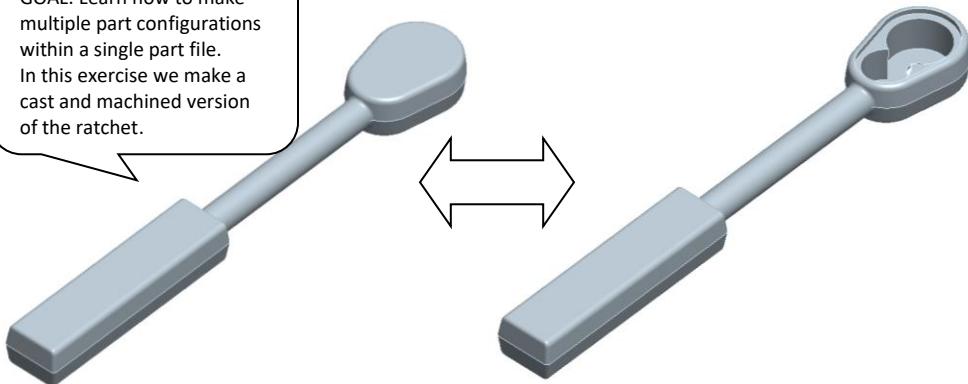


1. Open the Exercise_4_FAMILY part file.

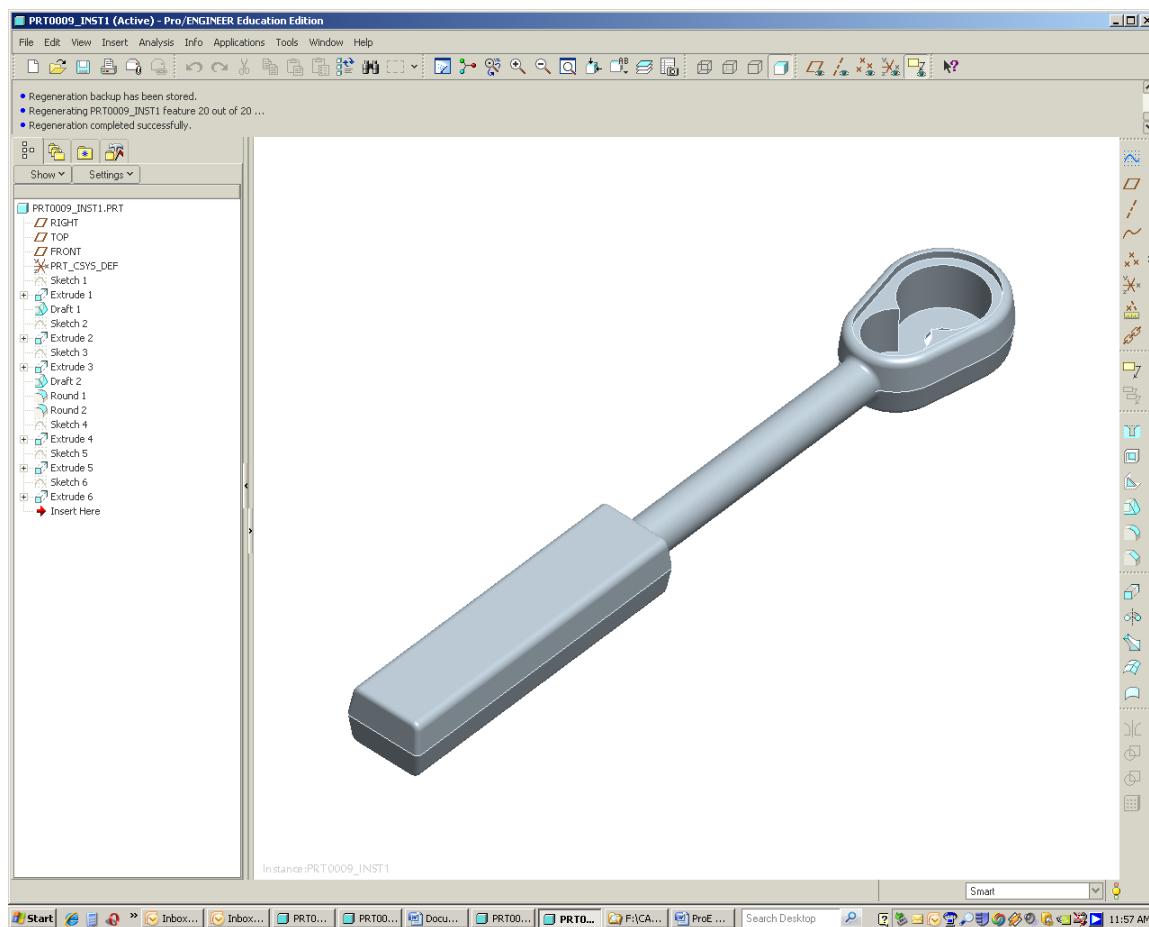


2. Go to the pull down menu- “Tools/Family Tables”

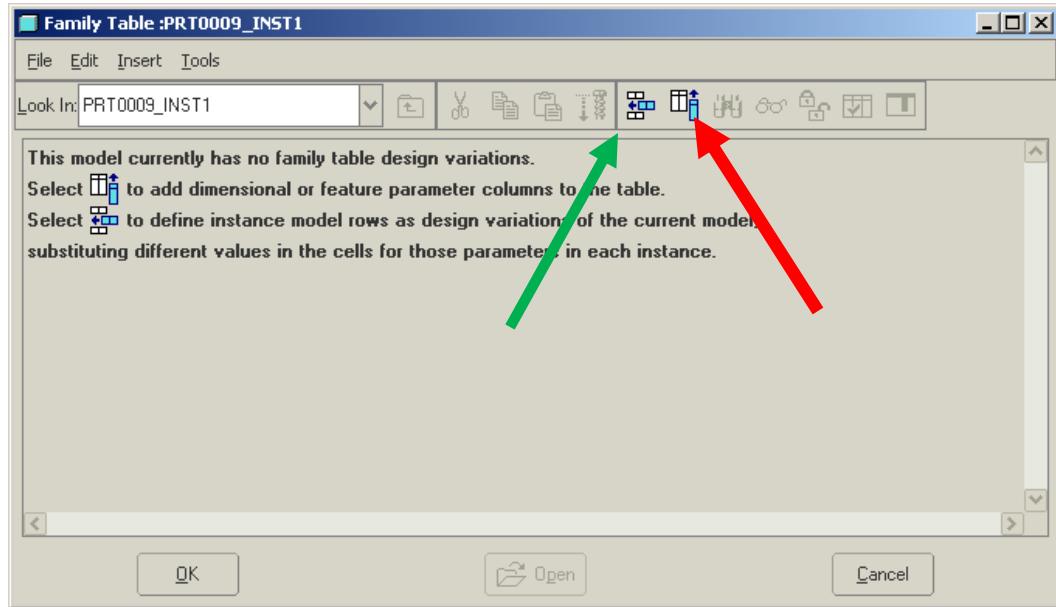


3. Select the “**Insert new instance**” two times. Then hit the “**Add...**” icon.

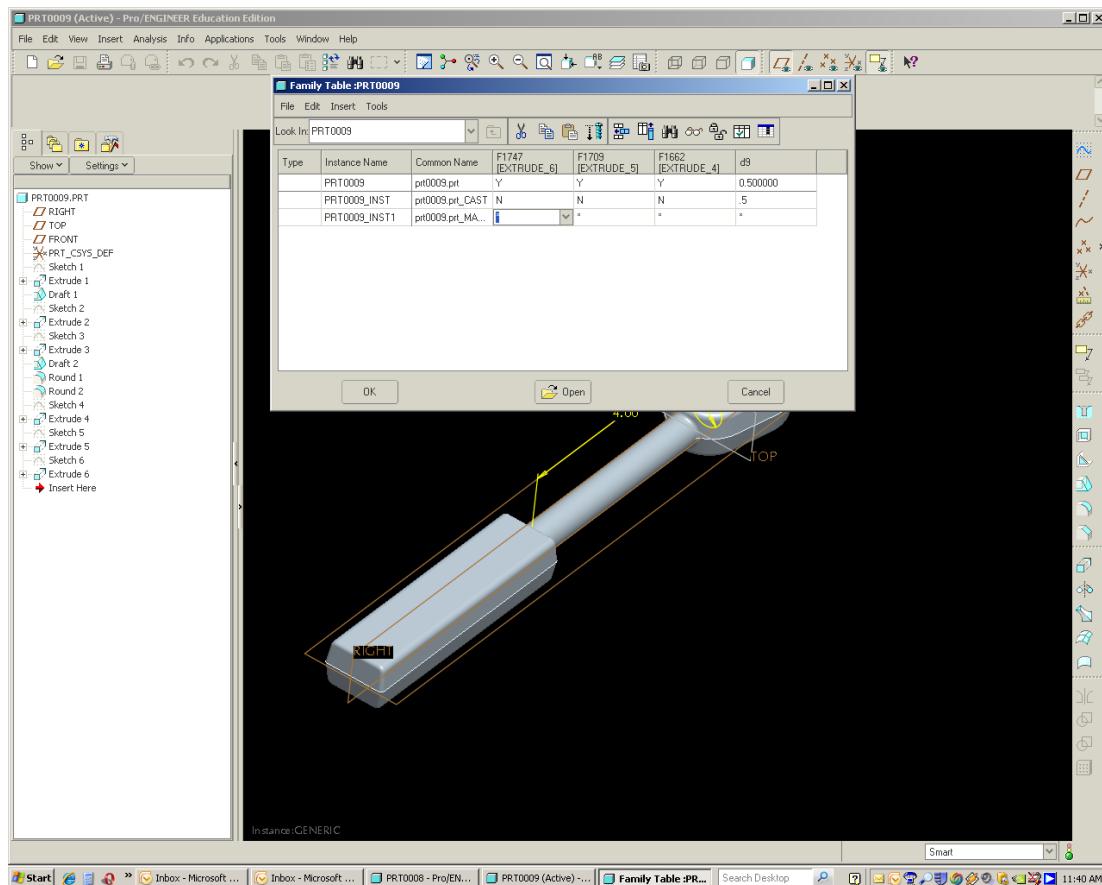


4. Select the Feature option, then select the “Extrude 4, 5, and 6”

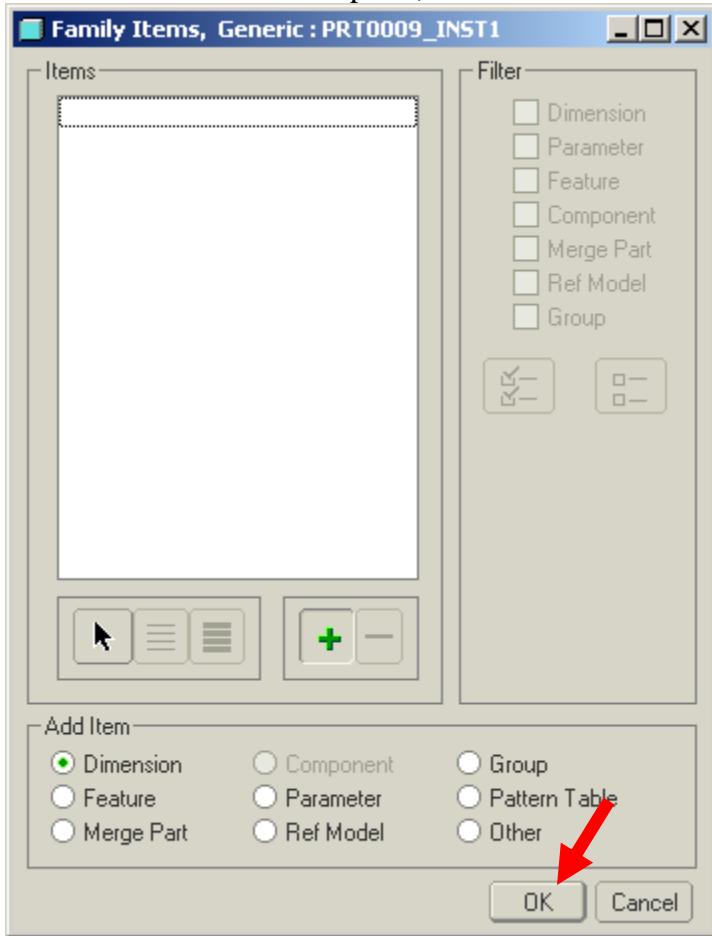


5. Select “OK”.
 6. Select “Verify”
 7. In the columns type “N” for no- to suppress the feature, or “Y” for yes for the feature to be unsuppressed. Hit “OK”.

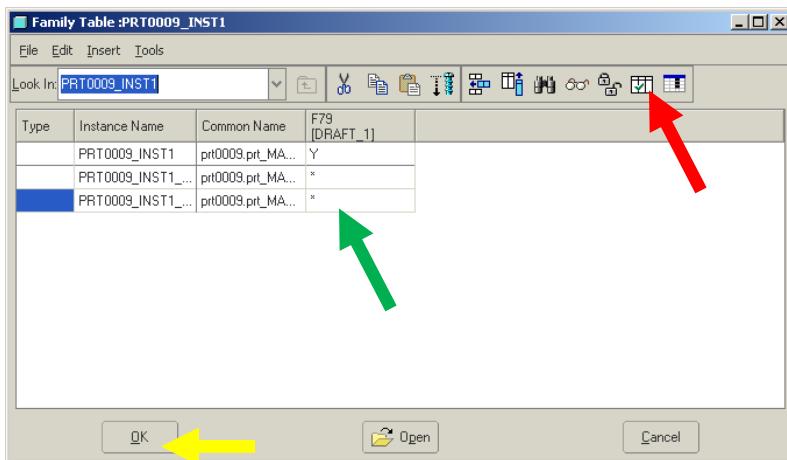

8. Hit “Verify” once again on the smaller Family Tree box.

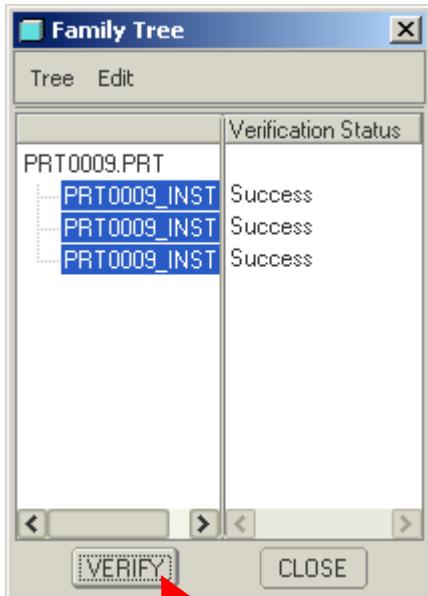

9. To view suppressed features on the tree select settings then Model Tree items.

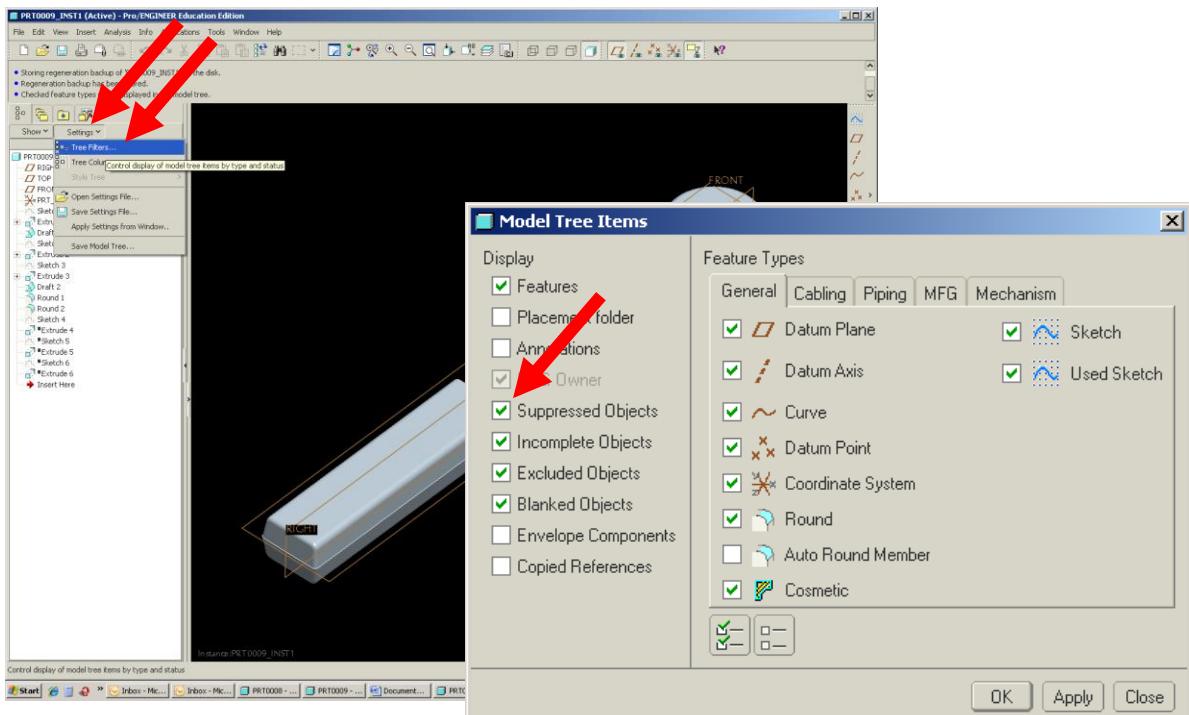

10. To open the additional instances go to File/Open, and select the original file, when it opens it will prompt you with a list of Family Parts available. FIN