


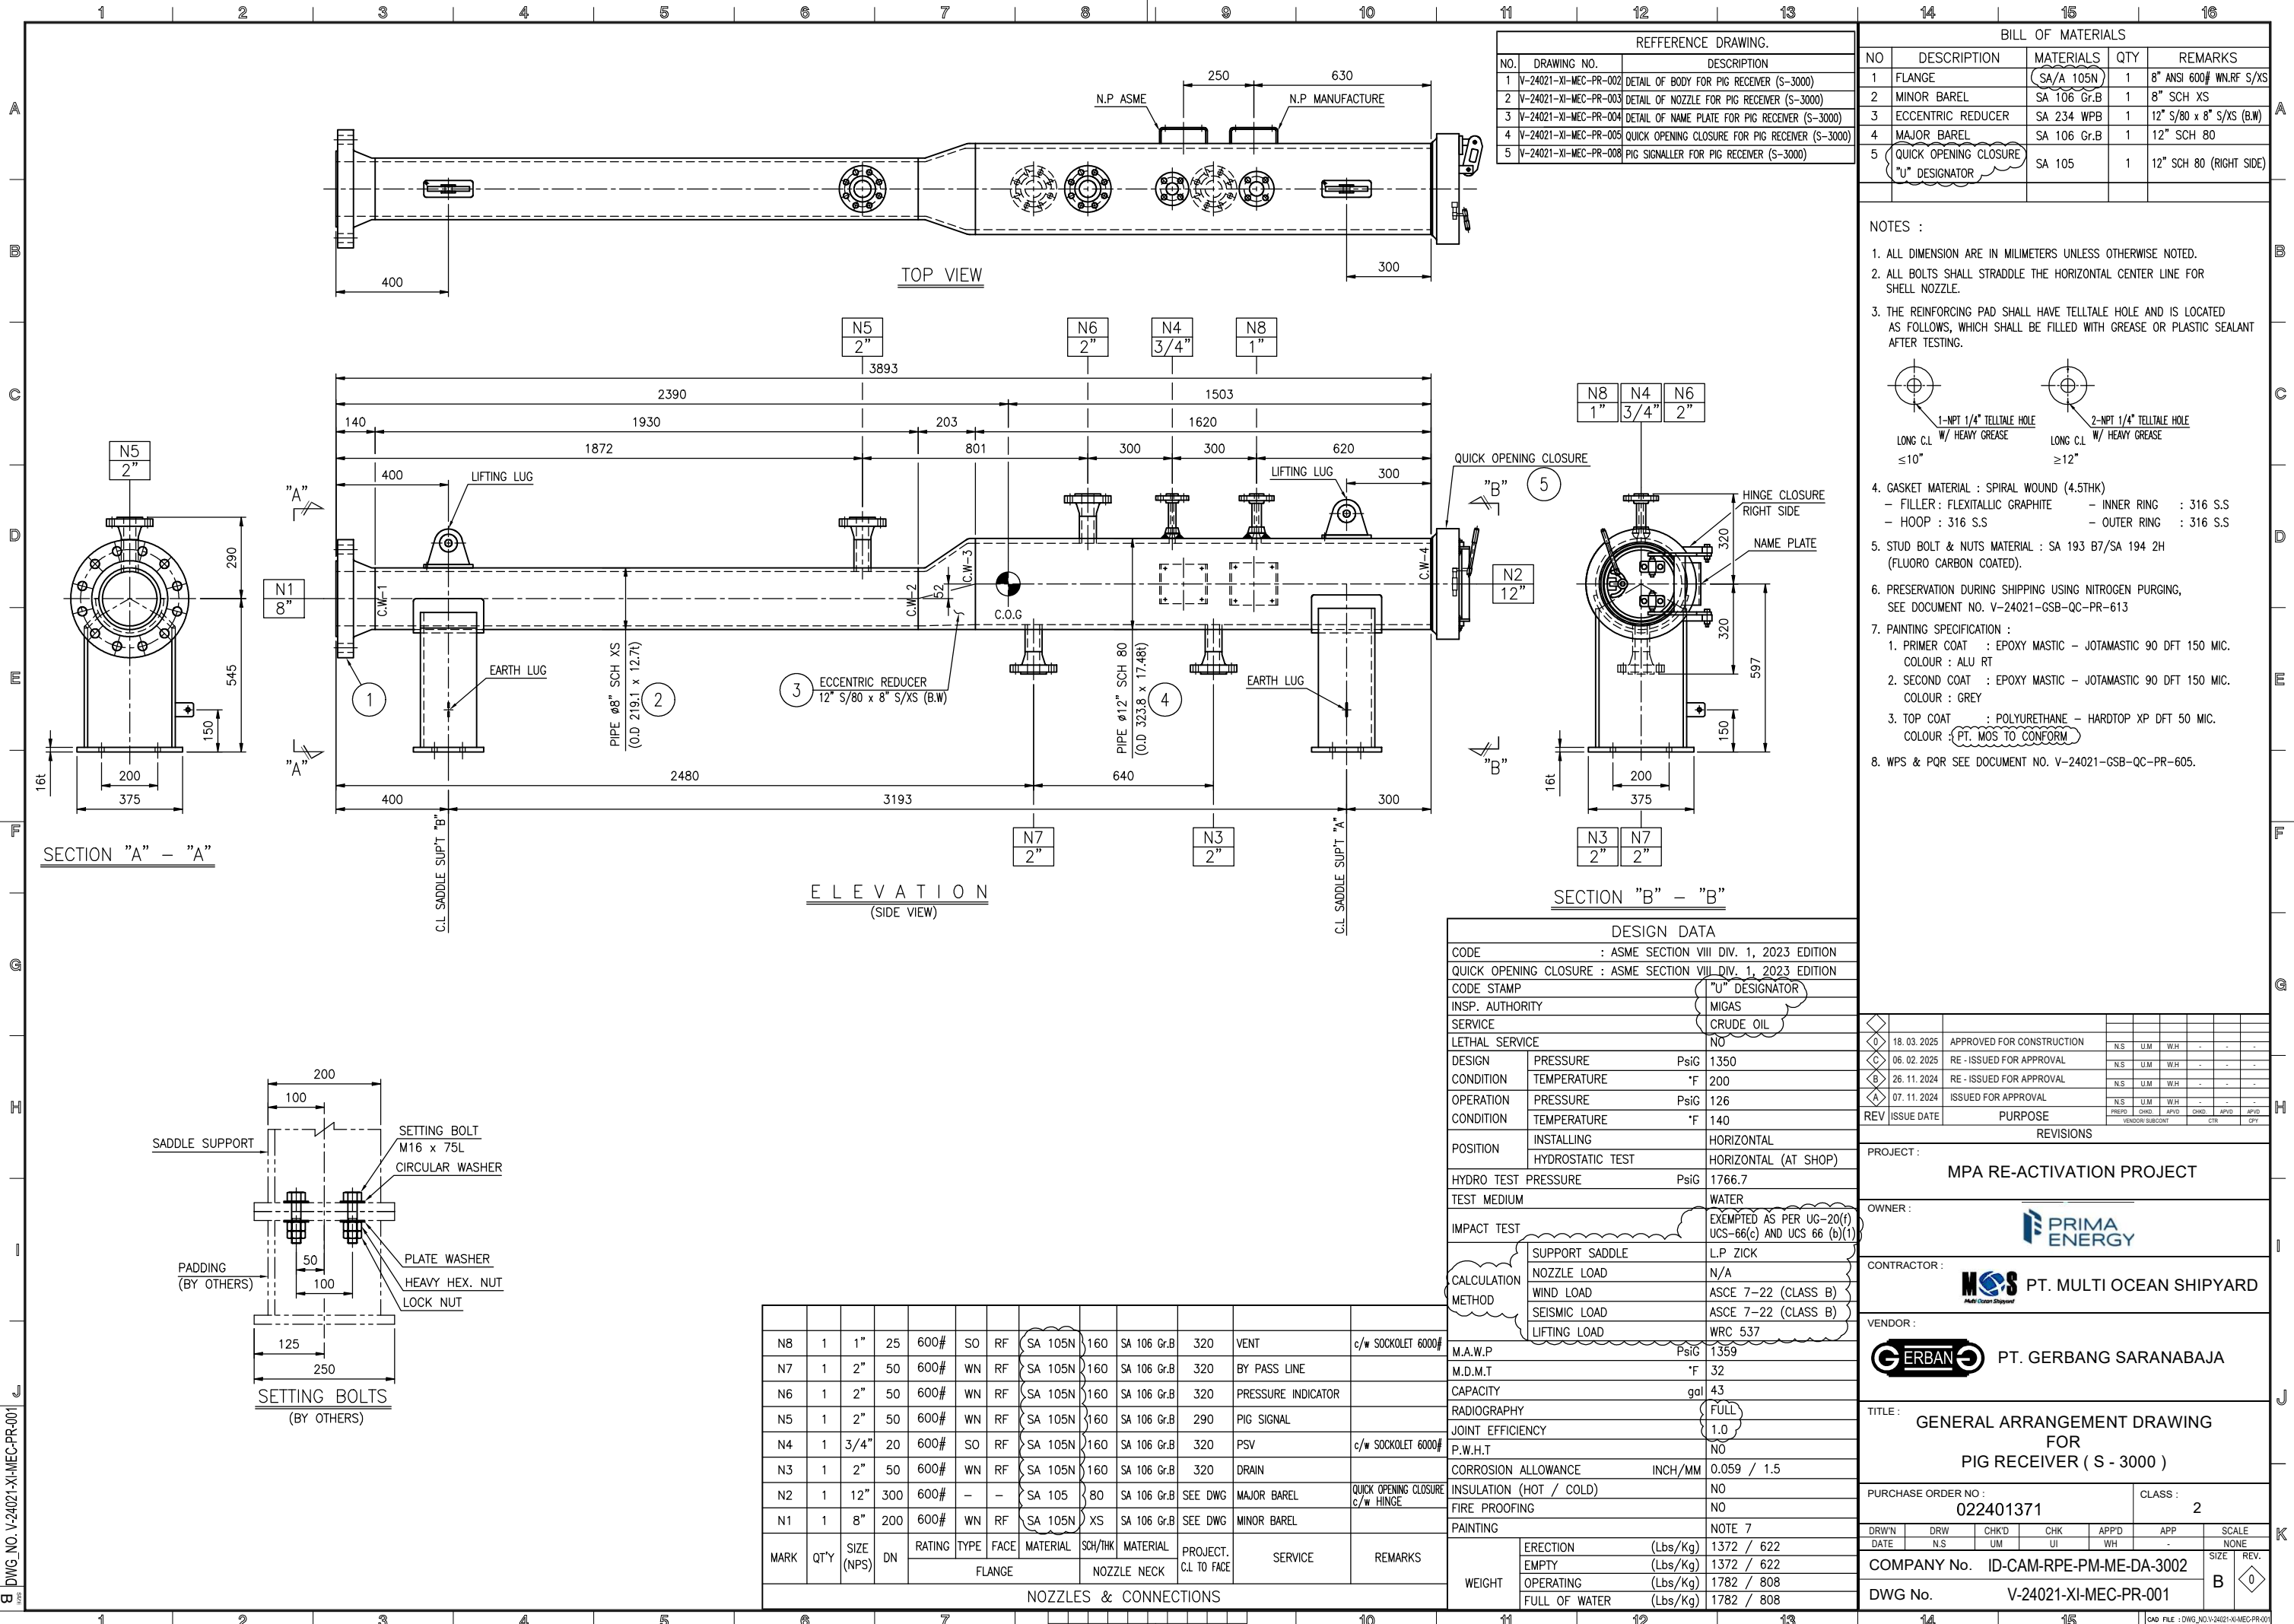


REFERENCE DRAWING.		
NO.	DRAWING NO.	DESCRIPTION
1	V-24021-XI-MEC-PR-002	DETAIL OF BODY FOR PIG RECEIVER (S-3000)
2	V-24021-XI-MEC-PR-003	DETAIL OF NOZZLE FOR PIG RECEIVER (S-3000)
3	V-24021-XI-MEC-PR-004	DETAIL OF NAME PLATE FOR PIG RECEIVER (S-3000)
4	V-24021-XI-MEC-PR-005	QUICK OPENING CLOSURE FOR PIG RECEIVER (S-3000)
5	V-24021-XI-MEC-PR-008	PIG SIGNALLER FOR PIG RECEIVER (S-3000)

BILL OF MATERIALS				
NO	DESCRIPTION	MATERIALS	QTY	REMARKS
1	FLANGE	SA/A 105N	1	8" ANSI 600# WNRF S/XS
2	MINOR BAREL	SA 106 Gr.B	1	8" SCH XS
3	ECCENTRIC REDUCER	SA 234 WPB	1	12" S/80 x 8" S/XS (B.W)
4	MAJOR BAREL	SA 106 Gr.B	1	12" SCH 80
5	QUICK OPENING CLOSURE "U" DESIGNATOR	SA 105	1	12" SCH 80 (RIGHT SIDE)

- NOTES :
- ALL DIMENSION ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.
 - ALL BOLTS SHALL STRADDLE THE HORIZONTAL CENTER LINE FOR SHELL NOZZLE.
 - THE REINFORCING PAD SHALL HAVE TELLTALE HOLE AND IS LOCATED AS FOLLOWS, WHICH SHALL BE FILLED WITH GREASE OR PLASTIC SEALANT AFTER TESTING.
-
- GASKET MATERIAL : SPIRAL WOUND (4.5THK)
- FILLER : FLEXITALLIC GRAPHITE - INNER RING : 316 S.S
- HOOP : 316 S.S - OUTER RING : 316 S.S
 - STUD BOLT & NUTS MATERIAL : SA 193 B7/SA 194 2H (FLUORO CARBON COATED).
 - PRESERVATION DURING SHIPPING USING NITROGEN PURGING, SEE DOCUMENT NO. V-24021-GSB-QC-PR-613
 - PAINTING SPECIFICATION :
 - PRIMER COAT : EPOXY MASTIC - JOTAMASTIC 90 DFT 150 MIC. COLOUR : ALU RT
 - SECOND COAT : EPOXY MASTIC - JOTAMASTIC 90 DFT 150 MIC. COLOUR : GREY
 - TOP COAT : POLYURETHANE - HARDTOP XP DFT 50 MIC. COLOUR : PT. MOS TO CONFORM
 - WPS & PQR SEE DOCUMENT NO. V-24021-GSB-QC-PR-605.

DESIGN DATA		
CODE	: ASME SECTION VIII DIV. 1, 2023 EDITION	
QUICK OPENING CLOSURE	: ASME SECTION VIII DIV. 1, 2023 EDITION	
CODE STAMP	"U" DESIGNATOR	
INSP. AUTHORITY	MIGAS	
SERVICE	CRUDE OIL	
LETHAL SERVICE	NO	
DESIGN	PRESSURE	PsiG 1350
CONDITION	TEMPERATURE	°F 200
OPERATION	PRESSURE	PsiG 126
CONDITION	TEMPERATURE	°F 140
POSITION	INSTALLING	HORIZONTAL
	HYDROSTATIC TEST	HORIZONTAL (AT SHOP)
HYDRO TEST	PRESSURE	PsiG 1766.7
TEST MEDIUM	WATER	
IMPACT TEST	EXEMPTED AS PER UG-20(f) UCS-66(c) AND UCS 66 (b)(1)	
CALCULATION METHOD	SUPPORT SADDLE	L.P. ZICK
	NOZZLE LOAD	N/A
	WIND LOAD	ASCE 7-22 (CLASS B)
	SEISMIC LOAD	ASCE 7-22 (CLASS B)
	LIFTING LOAD	WRC 537
M.A.W.P	PsiG 1359	
M.D.M.T	°F 32	
CAPACITY	gal 43	
RADIOGRAPHY	FULL	
JOINT EFFICIENCY	1.0	
P.W.H.T	NO	
CORROSION ALLOWANCE	INCH/MM	0.059 / 1.5
INSULATION (HOT / COLD)	NO	
FIRE PROOFING	NO	
PAINTING	NOTE 7	
WEIGHT	ERECTION	(Lbs/Kg) 1372 / 622
	EMPTY	(Lbs/Kg) 1372 / 622
	OPERATING	(Lbs/Kg) 1782 / 808
	FULL OF WATER	(Lbs/Kg) 1782 / 808

MARK	QTY	SIZE (NPS)	DN	RATING	TYPE	FACE	MATERIAL	SCH/THK	MATERIAL	PROJECT. CL TO FACE	SERVICE	REMARKS
N8	1	1"	25	600#	SO	RF	SA 105N	160	SA 106 Gr.B	320	VENT	c/w SOCKOLET 6000#
N7	1	2"	50	600#	WN	RF	SA 105N	160	SA 106 Gr.B	320	BY PASS LINE	
N6	1	2"	50	600#	WN	RF	SA 105N	160	SA 106 Gr.B	320	PRESSURE INDICATOR	
N5	1	2"	50	600#	WN	RF	SA 105N	160	SA 106 Gr.B	290	PIG SIGNAL	
N4	1	3/4"	20	600#	SO	RF	SA 105N	160	SA 106 Gr.B	320	PSV	c/w SOCKOLET 6000#
N3	1	2"	50	600#	WN	RF	SA 105N	160	SA 106 Gr.B	320	DRAIN	
N2	1	12"	300	600#	-	-	SA 105	80	SA 106 Gr.B	SEE DWG	MAJOR BAREL	QUICK OPENING CLOSURE c/w HINGE
N1	1	8"	200	600#	WN	RF	SA 105N	XS	SA 106 Gr.B	SEE DWG	MINOR BAREL	
NOZZLES & CONNECTIONS												
				FLANGE	NOZZLE NECK							

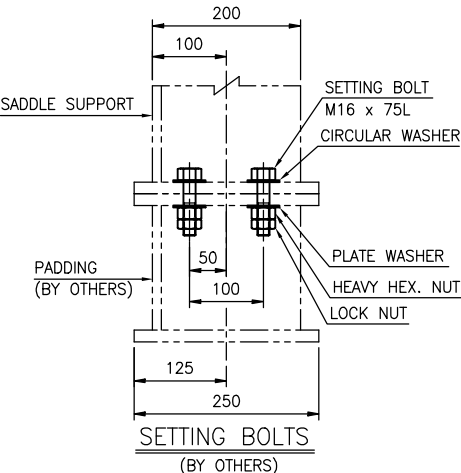

DWG NO. V-24021-XI-MEC-PR-001