Trueline

FIELD CARD — HOW TO SCAN A ROOM
REV 2 · IPHONE / IPAD LIDAR

01 Where to stand

PLAN VIEW — LOOKING DOWN

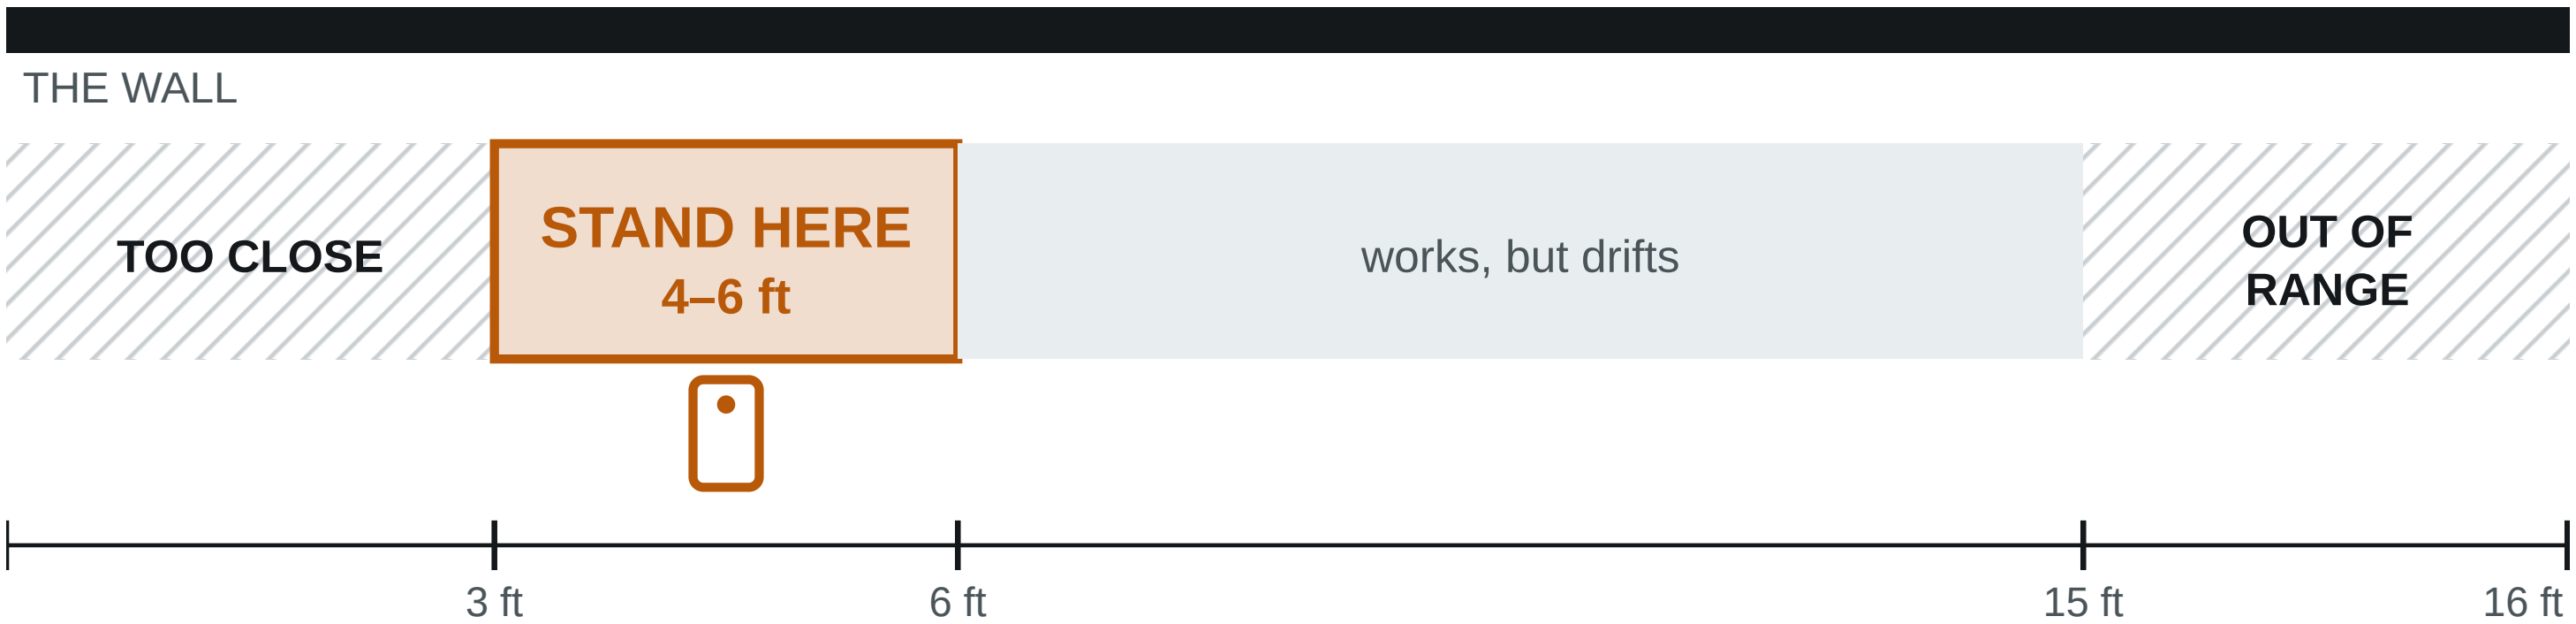

Why: the whole wall run has to be in frame, including where it meets the floor. Hug the wall and the sensor sees only a patch, with no long straight edge to fit a plane to. Minimum working distance is about 8–10 in; the range ceiling is about 5 m.

02 How to hold it

SIDE VIEW

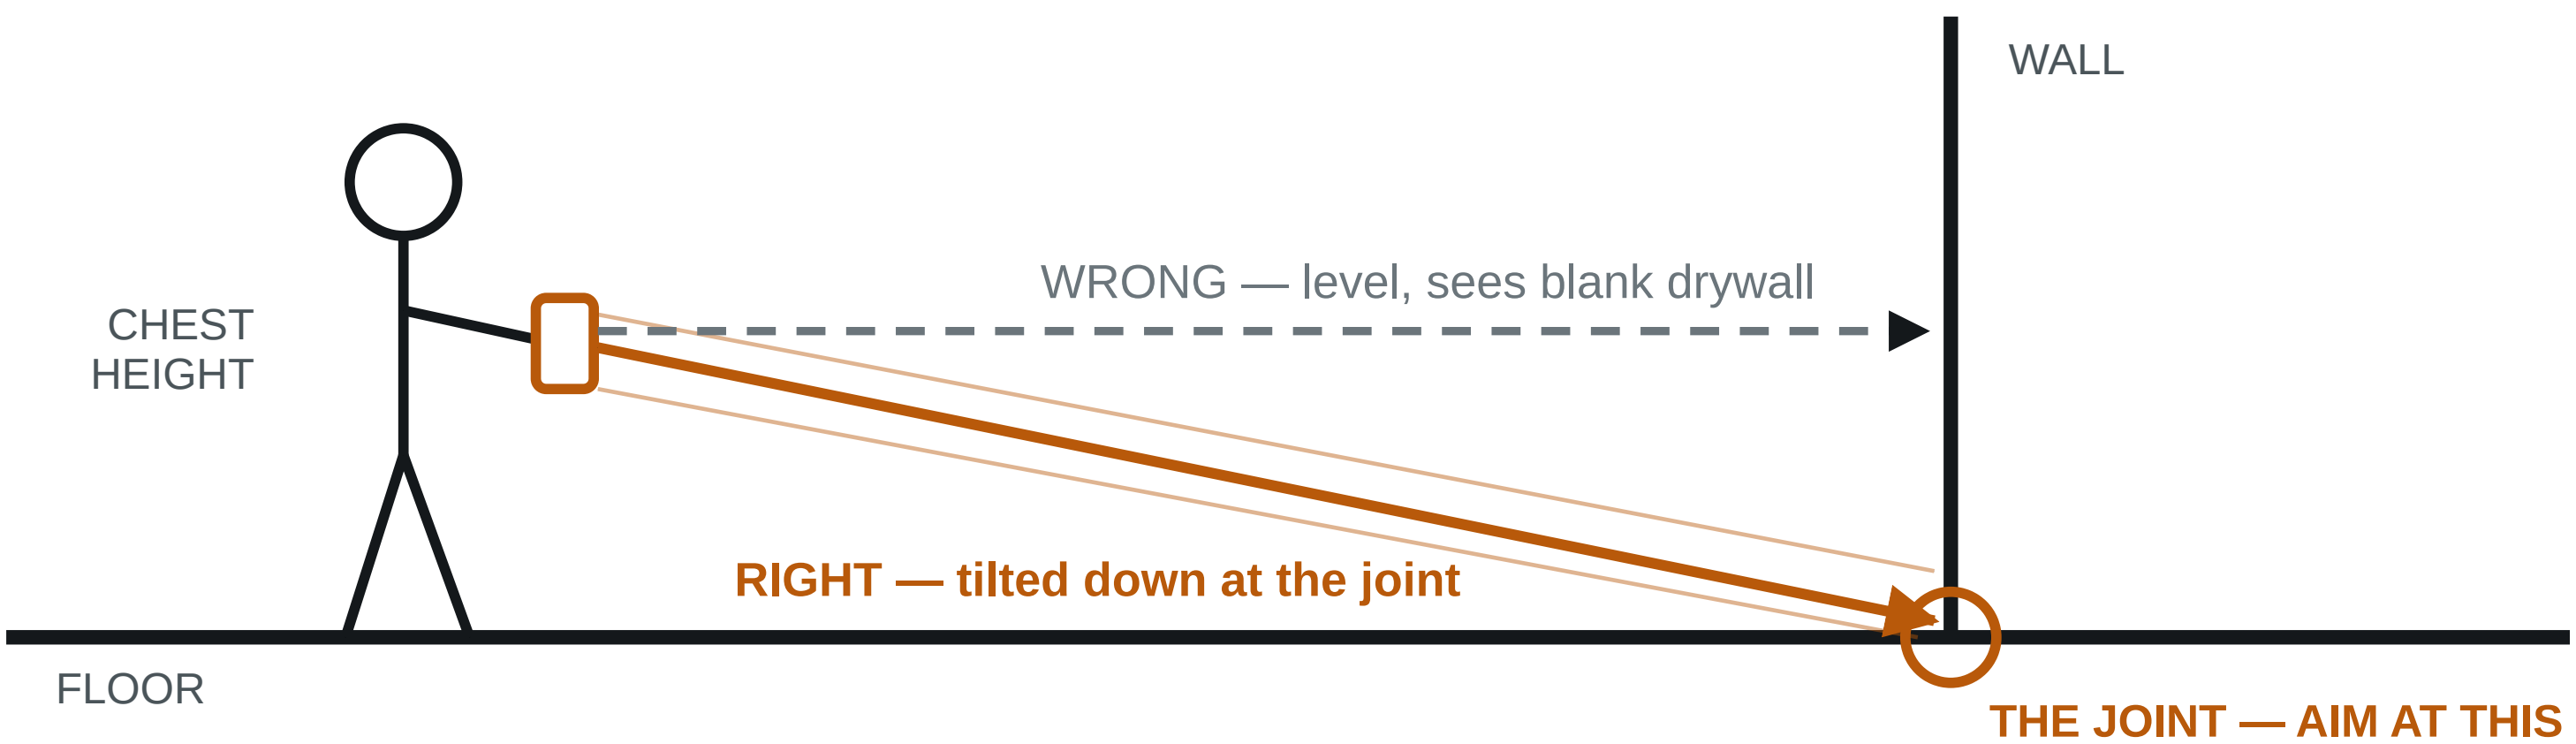

Chest height, tilted slightly down, two hands, elbows in. Smooth beats fast.

03 The limits — where it breaks

`Under 5 min`	Per room. Longer sessions drift, the device heats up, tracking degrades.
`Under 30 × 30 ft`	Apple's recommended maximum scan area. Bigger spaces get split.
`One room per scan`	Do not walk the house in one go. Each room is its own capture.
`Glass & mirrors`	Reflective surfaces cut reliability. Note them rather than trusting them.

IF THE APP TELLS YOU SOMETHING, IT WINS

RoomPlan gives live feedback — "Move farther away", "Slow down", "More light". It reads your actual session; this card does not. Follow the screen.

Figures are published manufacturer and industry values, not measurements taken by Trueline. Range ~5 m / 16 ft; minimum working distance ~8–10 in; recommended max scan area ~9 × 9 m. Validate against your own device before quoting any of them to a customer.

04 How to walk it

PLAN VIEW — THE WALK

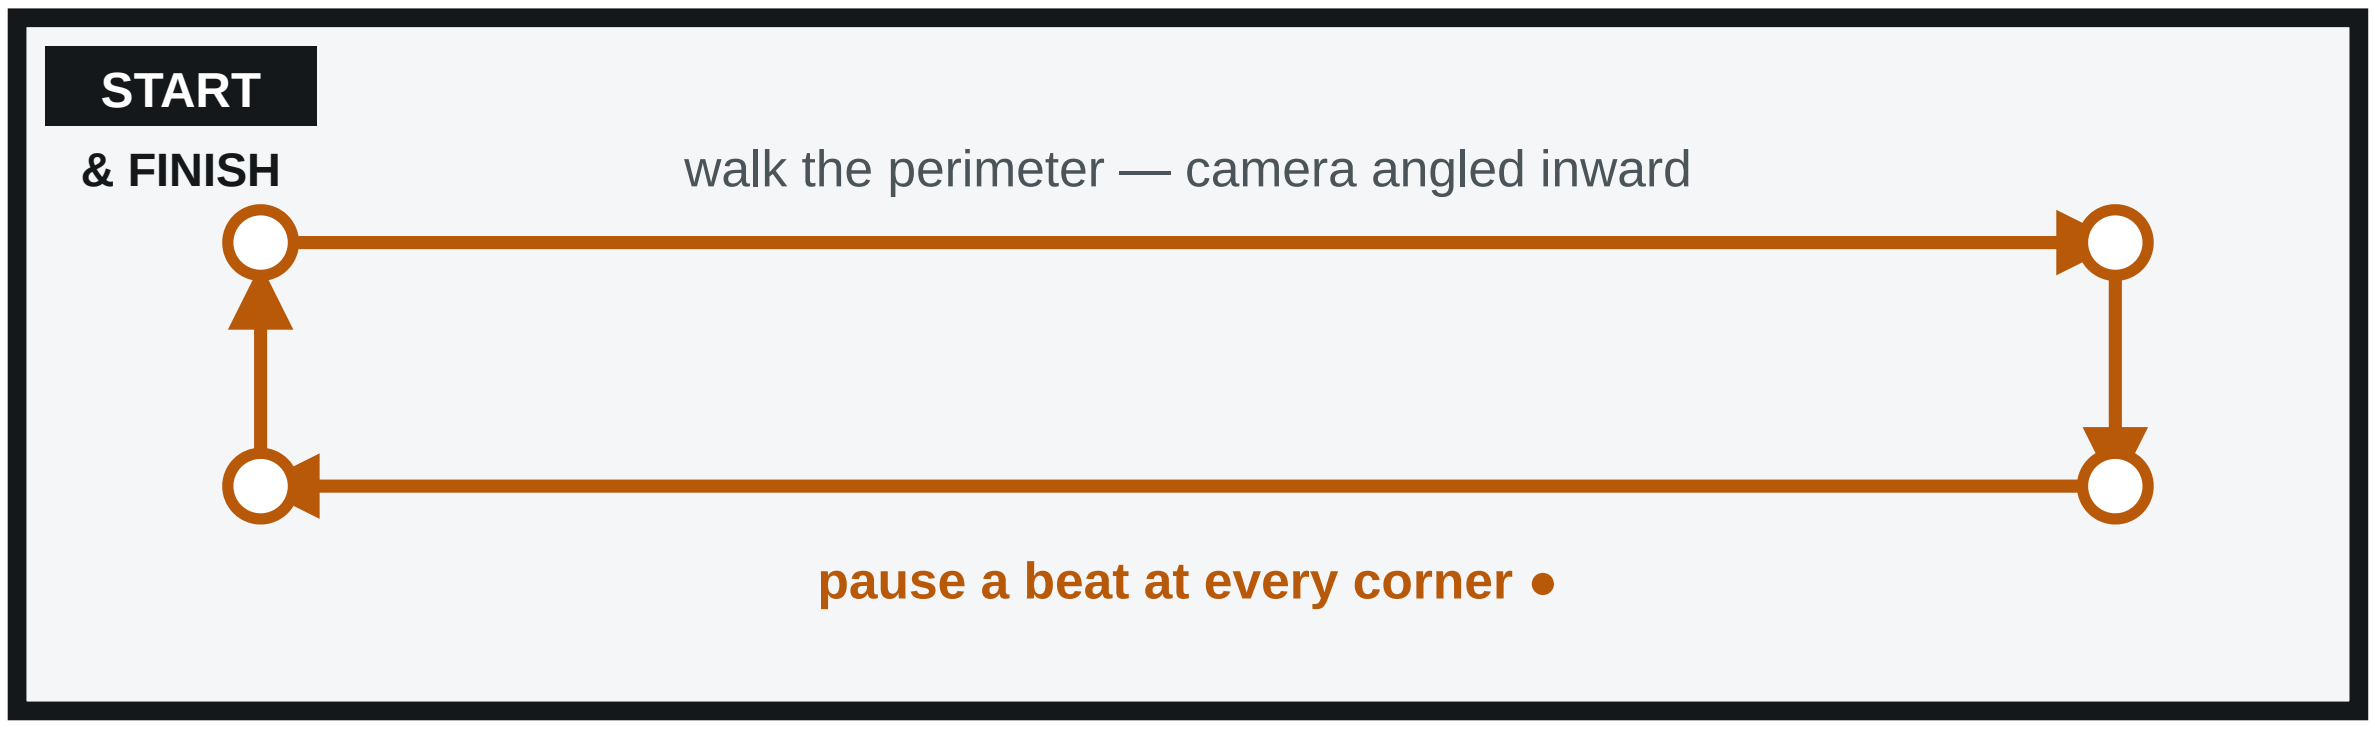

Finish where you started — that is what lets the tracker correct itself

1. **Start in a corner**, never mid-wall.
2. **Move your body**, not your arms.
3. **Pause at every corner.** That is where the geometry gets pinned down.
4. **Finish where you started.** Biggest quality lever on the card.
5. **Lights on.** LiDAR does not care; the camera tracking does.

05 Furniture — leave it, but know what it costs

PLAN VIEW — WHY A BLOCKED WALL CANNOT BE TRUSTED

So: **put the tape on walls that are clear**, and mark the blocked ones “B” on the log.

A tape reading on a blocked wall mixes sensor error with occlusion error, and calibrates nothing.

A furnished room is the real job, so do not empty it. Pick up loose floor clutter, and note which walls are blocked.

06 When it goes wrong

`Will not close`	Walk it again **in the opposite direction** before giving up.
`Wall missing`	Too close, or held level. Re-walk at 4–6 ft, angled at the floor joint.
`Tracking jumped`	Stop and start the room again. A lost-tracking scan is not worth saving.
`Device hot`	Scan was too long. Split the space up and let it cool.
`Simple room first`	It is the control case. If simple is right and awkward is wrong, the problem is geometry — the solver's job, not yours.

A room walked wrong cannot be fixed afterwards — it has to be walked again. Four minutes done properly beats twenty done badly.

07 The tape log — the most valuable thing you do

A scan on its own has no ground truth. Tape three or four **clear** walls per room and write the numbers here. **Measure one wall twice**, at the start and end of the scan — if the two differ, that is drift, a different problem from sensor error.

ROOM	WHICH WALL	TAPE SAYS	SCAN SAYS	NOTES — "B" IF BLOCKED

Also note: scan time per room, which device, and anything it got visibly wrong — a double door read as one, a closet swallowed, a wall split in two.

What to send back: one export file per room, scanned separately — not merged. Two rooms that share a wall are worth far more than two at opposite ends of the house. JSON above all other formats; DXF and PDF too if the app offers them. Plus this page, filled in.