


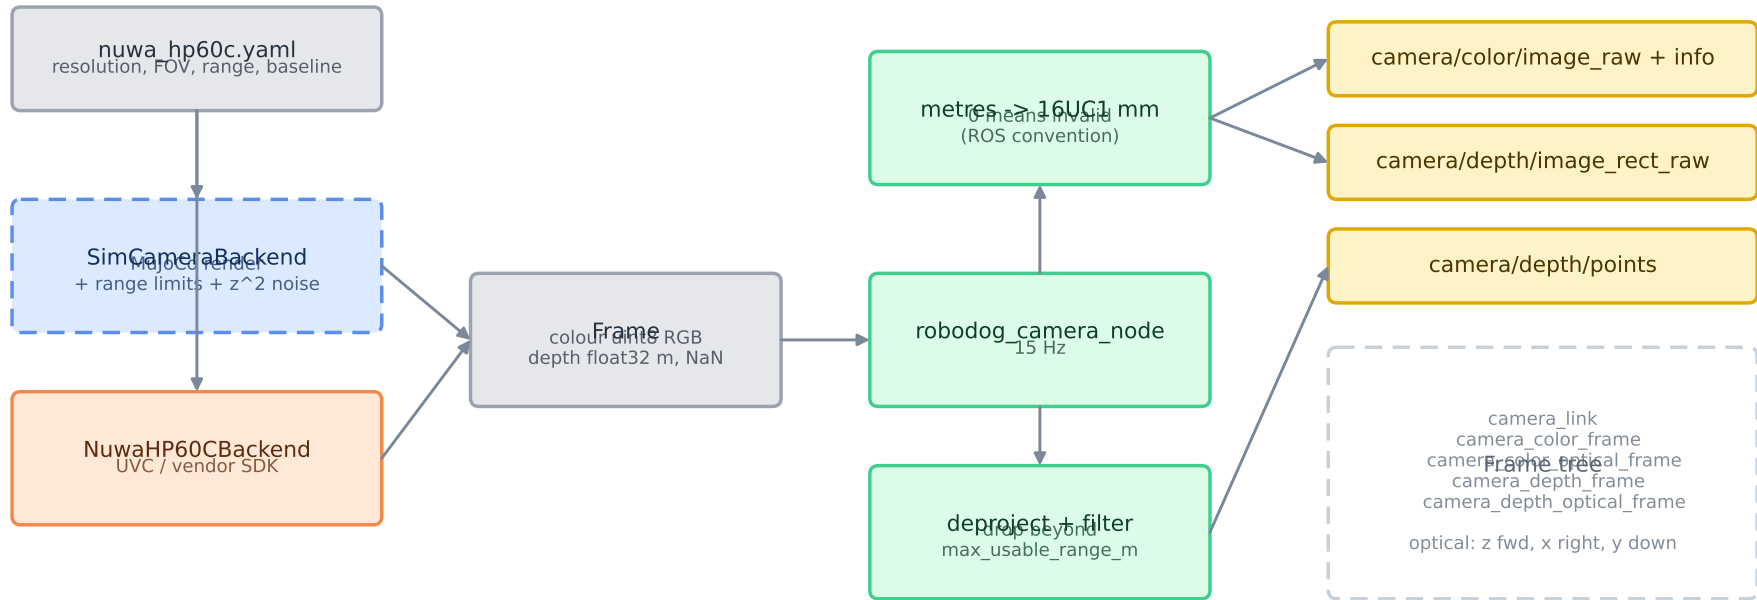

One configuration file drives both backends, so the simulated camera has the real device's intrinsics and range.