



# 448G/lane: electrical vs optical baud at each hop

## (A) Pluggable, aligned PAM4 (LPO/retimed target)

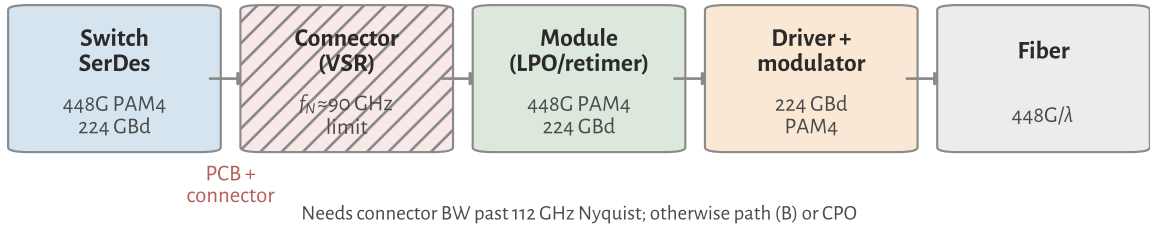

## (B) Pluggable, PAM6 electrical + gearbox (fallback)

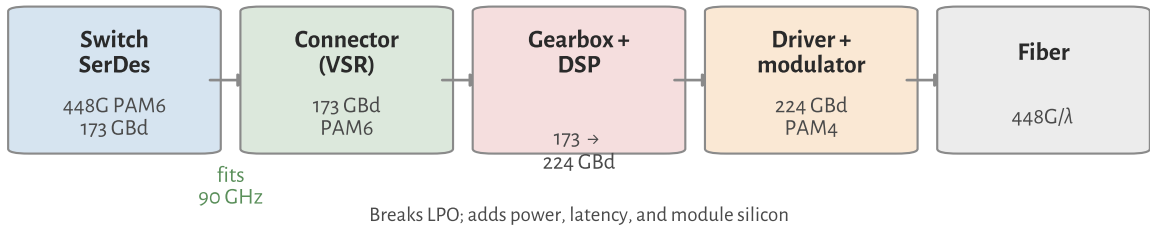

## (C) CPO: aligned PAM4 (no pluggable connector in path)

