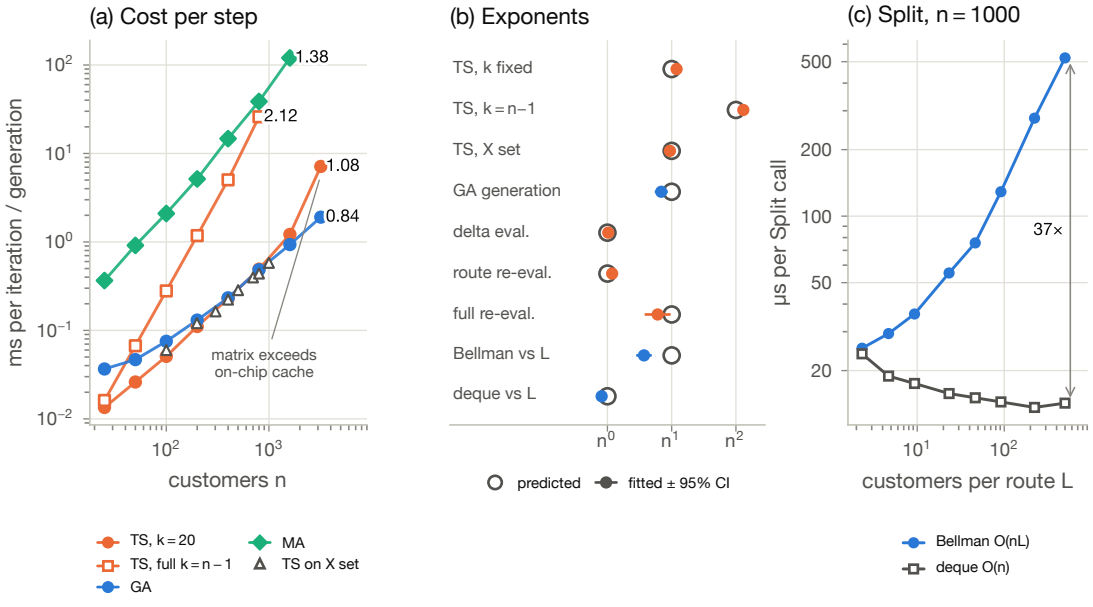
(a) Cost per step
ms per iteration / generation
customers n
1.38
2.12
1.08
0.84
matrix exceeds
on-chip cache
TS, k = 20
TS, full k = n − 1
GA
MA
TS on X set
(b) Exponents
TS, k fixed
TS, k = n−1
TS, X set
GA generation
delta eval.
route re-eval.
full re-eval.
Bellman vs L
deque vs L
predicted
fitted ± 95% CI
(c) Split, n = 1000
µs per Split call
customers per route L
37×
Bellman O(nL)
deque O(n)