



Reliability diagrams before and after temperature scaling


LightGBM (LC) — val
ECE 0.009 -> 0.006

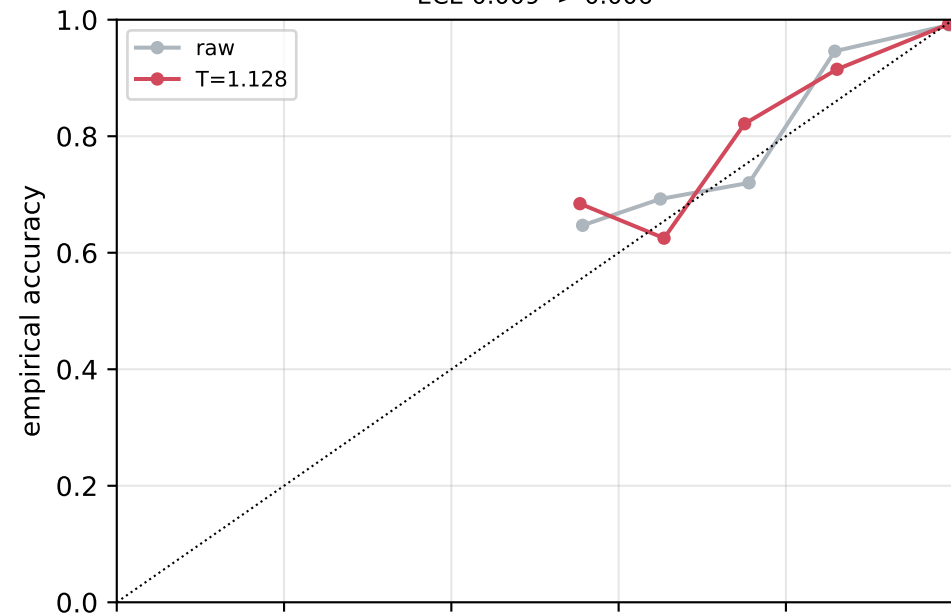

LightGBM (LC) — test
ECE 0.021 -> 0.016

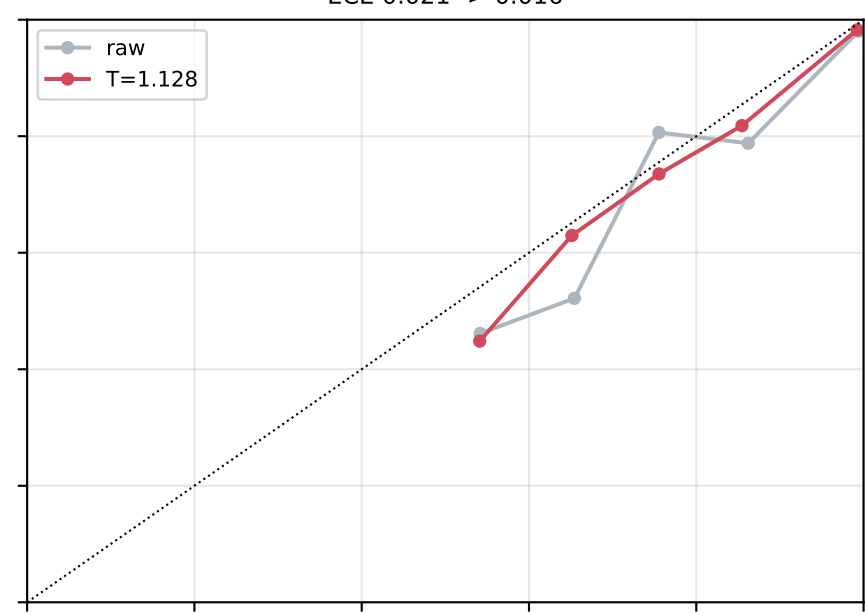

EfficientNet-B0 (stamp) — val
ECE 0.044 -> 0.015

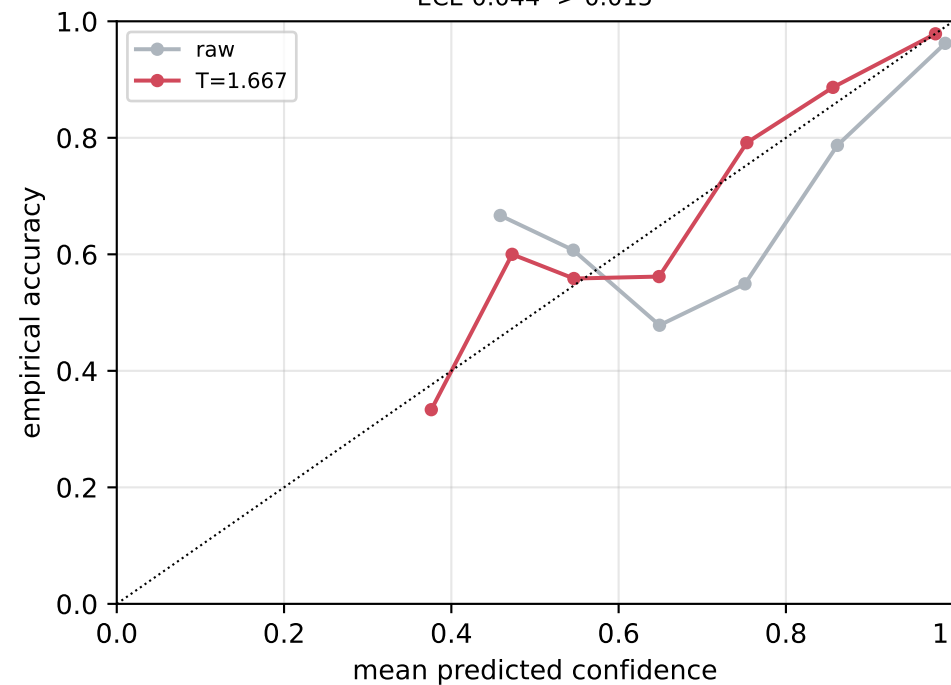

EfficientNet-B0 (stamp) — test
ECE 0.041 -> 0.010

