
NAMA :M.FATIHUL RAHMAN

NIM :09010282327035

KELAS :MI 3A

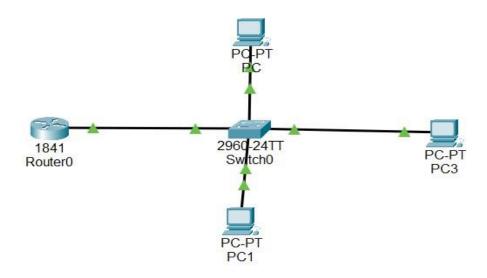

VLAN	Name	Status	Ports
1	default	active	Fa0/4, Fa0/5, Fa0/6, Fa0/7 Fa0/8, Fa0/9, Fa0/10, Fa0/11 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/22, Fa0/23 Fa0/24, Gig0/1, Gig0/2
2	humas	active	Fa0/1
3	keuangan	active	Fa0/2
4	it	active	Fa0/3
5	pimpinan	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

VLAN	Name	Status	Port
1	Default	Active	Fa0/4, Fa0/5, Fa0/6, Fa0/7, Fa0/8, Fa0/9, Fa0/10, Fa0/11, Fa0/12, Fa0/13, Fa0/14, Fa0/15, Fa0/16, Fa0/17, Fa0/18, Fa0/19, Fa0/20, Fa0/21, Fa0/22, Fa0/23, Fa0/1, Fa0/2,
2	Humas	Active	Fa0/1,
3	Keuangan	Active	Fa0/2,
4	IT	Active	Fa0/3,
5	Pimpinan	Active	

```
Pinging 192.168.100.1 with 32 bytes of data:
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.100.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = Oms, Maximum = Oms, Average = Oms
C:\>ping 192.168.150.1
Pinging 192.168.150.1 with 32 bytes of data:
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.150.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = Oms, Maximum = Oms, Average = Oms
```

```
::\>ping 192.168.100.1
Pinging 192.168.100.1 with 32 bytes of data:
Reply from 192.168.100.1: bytes=32 time=11ms TTL=255 Reply from 192.168.100.1: bytes=32 time<1ms TTL=255
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.100.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 11ms, Average = 2ms
C:\>192.168.150.1
Invalid Command.
C:\>ping 192.168.150.1
Pinging 192.168.150.1 with 32 bytes of data:
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.150.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>ping 192.168.200.1
Pinging 192.168.200.1 with 32 bytes of data:
Reply from 192.168.200.1: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.200.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
Ping statistics for 192.168.100.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 192.168.150.1

Pinging 192.168.150.1: bytes=32 time<1ms TTL=255
Reply from 192.168.100.1

Pinging 192.168.100.1 with 32 bytes of data:

Reply from 192.168.100.1 bytes=32 time<1ms TTL=255
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255
Reply from 192.168.200.1: bytes=32 time<1ms TTL=255
Reply from 192.168.200.0.0 con TTL=255
```