


PCB TOP VIEW

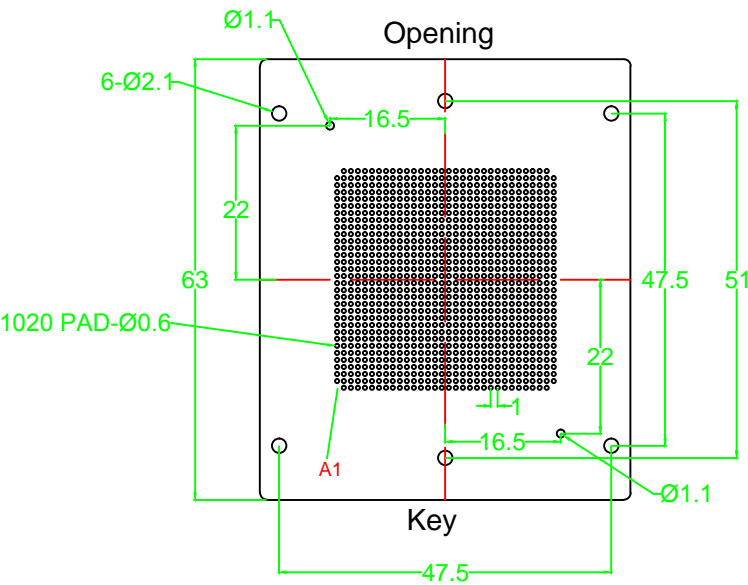

MATERIAL:
1. LID: ALLOY
2. BASE: ALLOY
3. PLUNGER: BeCu, Au on Ni Plated
4. SPRING: SWP-A/B, Au on Ni Plated

SPECIFICATION:
1. CURRENT RATING: 2A MAX
2. CONTACT RESISTANCE: 80 milliohms MAX
3. DIELECTRIC WITHSTANDING VOLTAGE: 100V
AC for one minute
4. BANDWIDTH: 6.1Ghz @ -2dB
5. OPERATION TEMPERATURE: -40 ~ +155
6. LIFE SPAN: 50,000 Cycles (Mechanical)

Δ C			DWG NO.		PART NAME	ASS5363-XGA1020-1.0-CL
Δ B			MATERIAL	SCALE	TITLE	
Δ A			QTY	UNIT	mm	
REV	DATE		SHEET	REV	01	
APPLICATION			APPROVE	DATE	ALLSOCKET	
DATE	DATE	DATE	DATE	DATE		
DATE	DATE	DATE	DATE	DATE		