
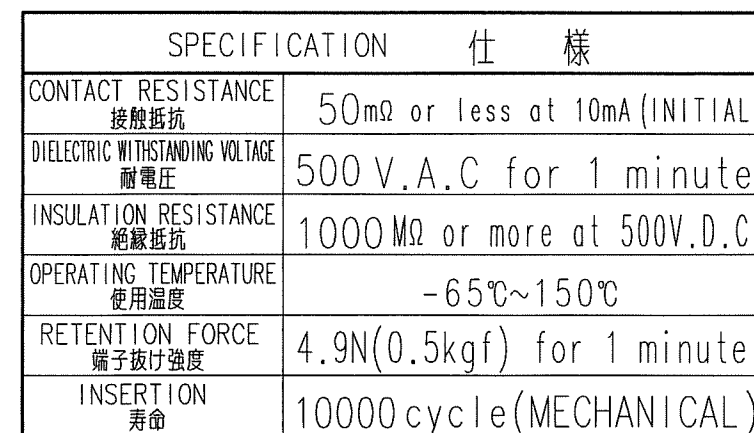


NOTES

1) MARK PIN COUNT WITH LASER MARK.

★ 2) Under the any humidity involved testing, the socket MUST be fixed on the BIB with provided screws.

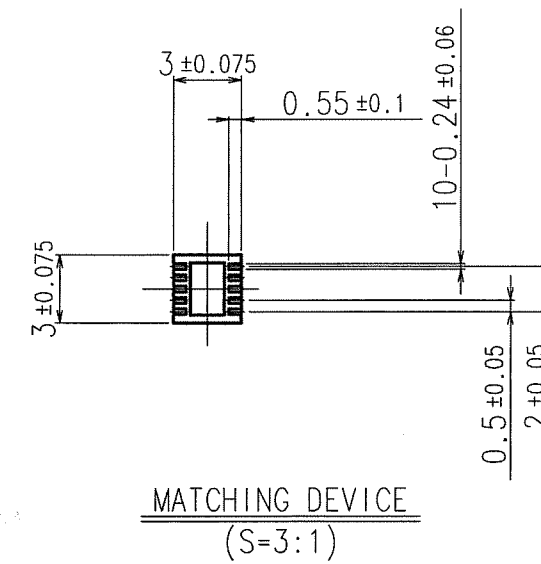

★	17	COTS	55-113-131-01	HEX. THIN NUT M2	SUS	2	SHIP WITH SOCKETS	D
★	16	COTS	55-113-111-01	SPRING LOCK WASHER 2.0	SUS	2	SHIP WITH SOCKETS	
★	15	COTS	55-113-009-01	PAN HEAD SCREW M2XL10	SUS	2	SHIP WITH SOCKETS	
	14	COTS	55-113-002-01	E-RING(φ1.2)	SUS	2		
	13	QFN-16-0.5-01-12	55-111-861-01	GROUND PIN	BRASS	1		
	12	FP-28-1.27-09-003	55-112-035-01	COIL SPRING	SUS	1	FOR COVER	
	11	FPQ-64-1.0-01-004	55-112-007-01	COIL SPRING	SUS	1	FOR STOPPER	
	10	QFN-36-0.5-01-11	55-112-810-01	COIL SPRING	SUS	1	FOR PUSHER	
	9	QFN-68-0.5-01-10	55-111-834-01	SHAFT	SUS	1	FOR COVER	
	8	QFN-68-0.5-01-09	55-111-833-01	SHAFT	SUS	1	FOR STOPPER	
	7	FPQ-64-1.0-01-003	55-299-043-01	STOPPER	PPS	1		
	6	QFN-20-0.5-01-06	56-290-912-01	PUSHER	PES	1		
	5	QFN-68-0.5-01-03	56-110-723-01	FNTO CONTACT	BeCu	4		
	4	QFN-68-0.5-01-02	56-110-722-01	FMSO CONTACT	BeCu	6		
★	3	QFN-20-0.5-01-04	57-290-446-01	GUIDE	PES	1		
	2	QFN-68-0.5-01-05	56-290-835-01	COVER	PES	1		
	1	QFN-20-0.5-01-01	56-290-841-01	BODY	PES	1		

ESP CONFIDENTIAL

△						機種 USED FOR	顧客品番 CUSTOMER'S PART NO.	一般公差 GENERAL TOLERANCES	±0.3, ±10°	F
△						承認者 APPROVED BY	H.KISO	品名 NAME QFN-10(20)BT-0.5-02-00	尺度 SCALE 3:1	
△						検査者 CHECKED BY		IC SOCKET	REV.NO. b	
△						設計者 DESIGNED BY	H.KANESASHI			
△						製図者 DRAWN BY	A.MORISHITA	図番 DRAWING NO.	55-037-069-01 1/1	
△	'05/2/7	改訂図No.1発行 (変更は★部14ヶ所)	Y.O	C.I		承認者 DRAWN BY	A.MORISHITA			
×	訂正年月日 DATE	訂正箇所 REVISING'S	承認 APP	担当 SIGN	作成年月日 ISSUED_QN	2004/03/02				