


TOP VIEW

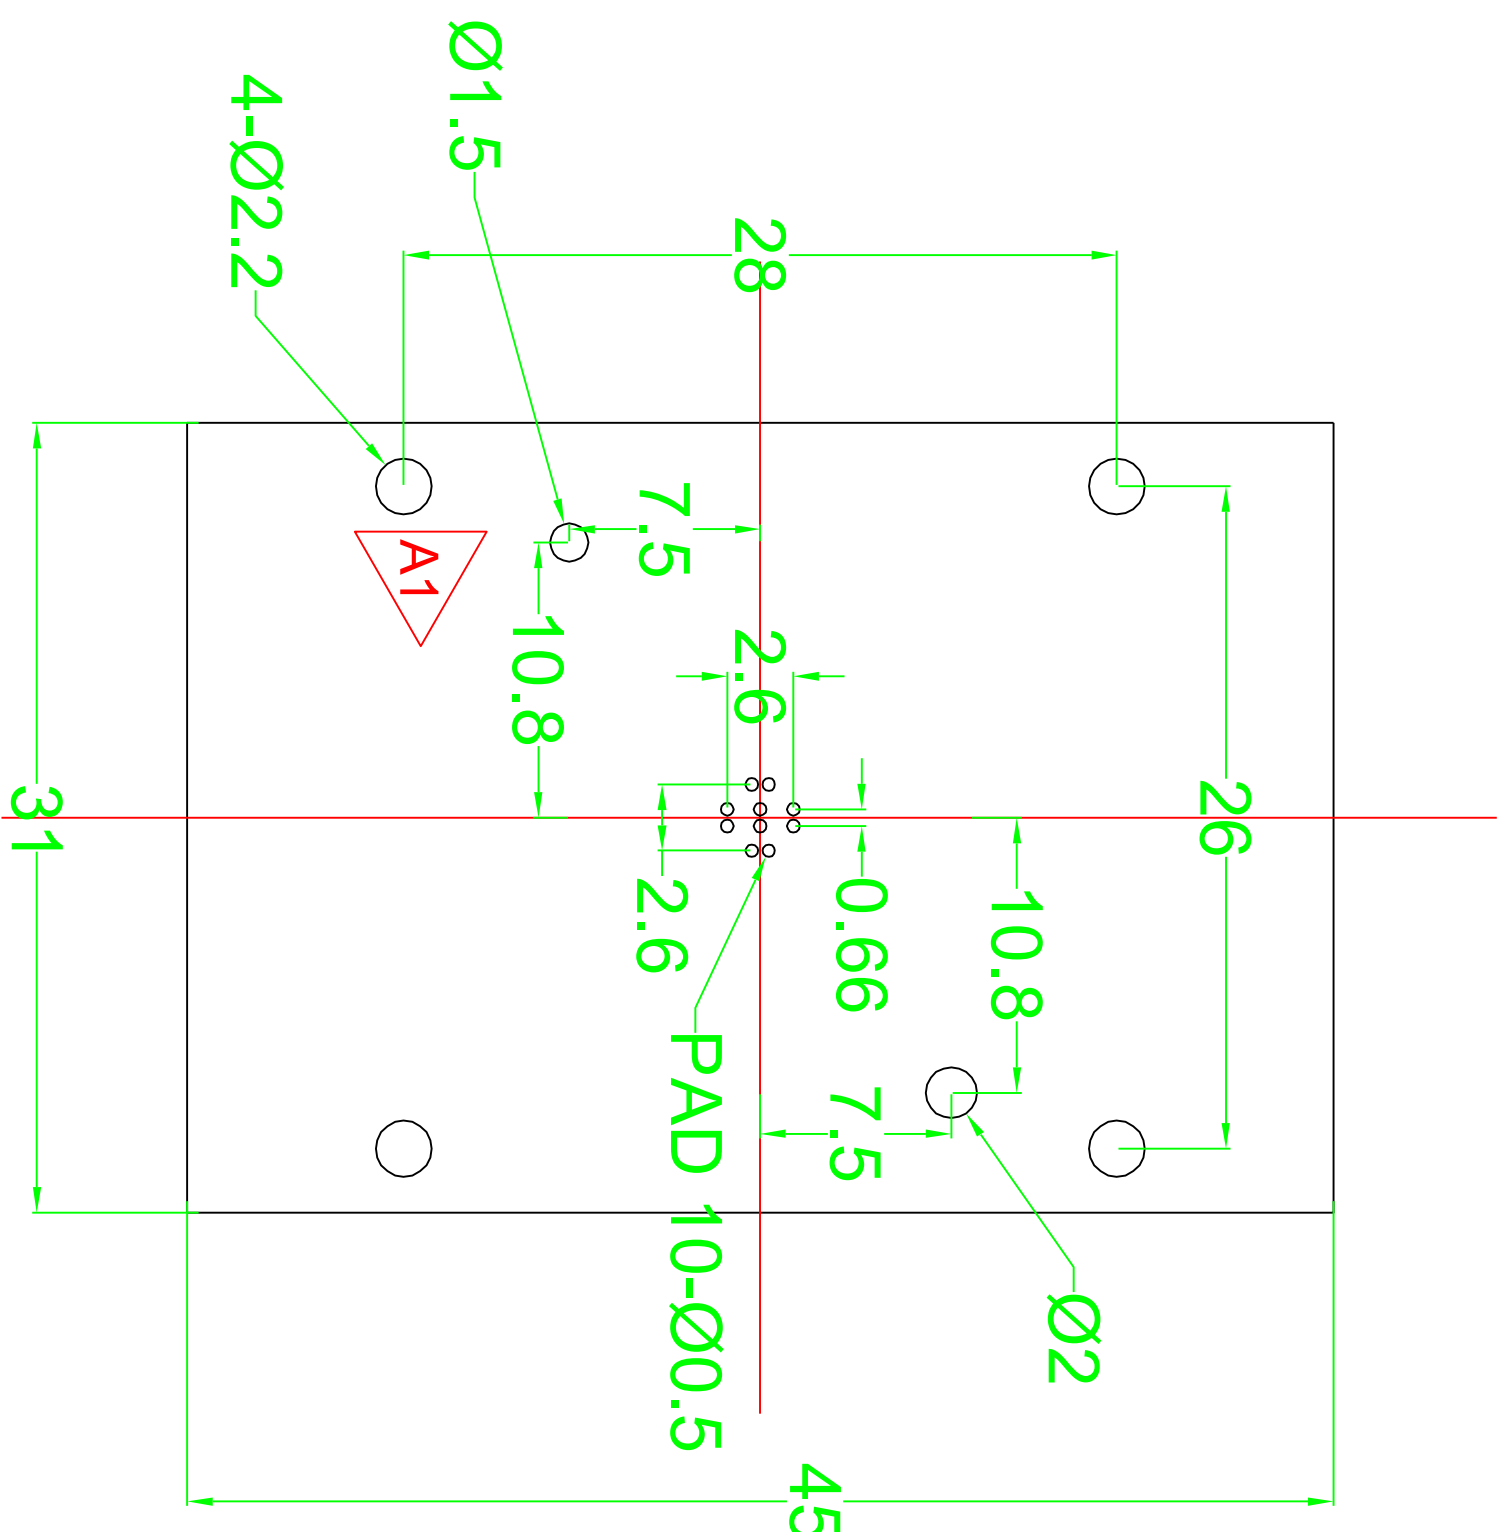

- MATERIAL:**
1. LID: ALLOY
 2. BASE: ALLOY
 3. PLUNGER: BeCu, Au on Ni Plated
 4. SPRING: SWP-A/B, Au on Ni Plated
- SPECIFICATION:**
1. CURRENT RATING: 2A MAX
 2. CONTACT RESISTANCE: 80 milliohms MAX
 3. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC for one minute
 4. BANDWIDTH: 6.1GHz@2dB
 5. OPERATION TEMPERATURE: -40°C ~ +155°C
 6. LIFE SPAN: 50,000 Cycles (Mechanical)

△C			DWG NO.		PART NAME	AS-GD-CF16-3X3-0.66-CL
△B			MATERIAL	SCALE 1:1	TITLE	
△A			QTY	UNIT	mm	
REV			DATE	SHEET	REV	01
APPLICATION			APPROVE	DATE		
DESIGN	DATE		CHECK	DATE		
ALL UNITS ARE IN MILLIMETERS (INCHES)			DATE	DATE		

ALLSOCKET