


## TOP VIEW

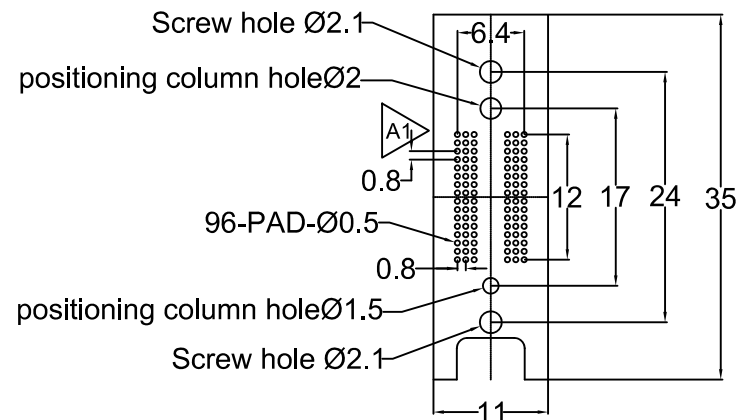

**MATERIAL:**  
 1. LID: ALLOY  
 2. BASE: ALLOY  
 3. PLUNGER: BeCu, Au on Ni Plated  
 4. SPRING: SWP-A/B, Au on Ni Plated

**SPECIFICATION:**  
 1. CURRENT RATING: 1A MAX  
 2. CONTACT RESISTANCE: 80 milliohms MAX  
 3. DIELECTRIC WITHSTANDING VOLTAGE:  
 100V AC for one minute  
 4. BANDWIDTH: 7.1Ghz~-1dB  
 5. OPERATION TEMPERATURE: -40°C ~ +155°C  
 6. LIFE SPAN: 50,000 Cycles (Mechanical)

**Size limiter  
 Replaceable:**

7.5\*10.6, 8\*10.5, 8.5\*12.5, 9\*10.6, 9\*14, 10\*12,  
 7.5\*11.1, 8\*11.5, 8\*14, 9\*11.1, 9.4\*11.1, 10\*12.5,  
 7.5\*12.5, 8\*12.5, 9\*10.5, 9\*11.5, 10\*11, 10.5\*12,  
 custom

| DRAWING |        | SCALE |       | PART NAME      |       |
|---------|--------|-------|-------|----------------|-------|
| DATE    | DESIGN | DATE  | SCALE | AS-DDR96-CL-01 | TITLE |
| DATE    | DESIGN | DATE  | SCALE | ALLSOCKET      |       |
| DATE    | DESIGN | DATE  | SCALE |                |       |
| DATE    | DESIGN | DATE  | SCALE |                |       |
| DATE    | DESIGN | DATE  | SCALE |                |       |