

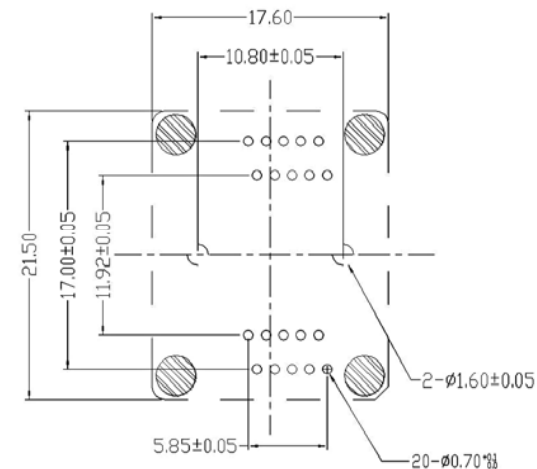
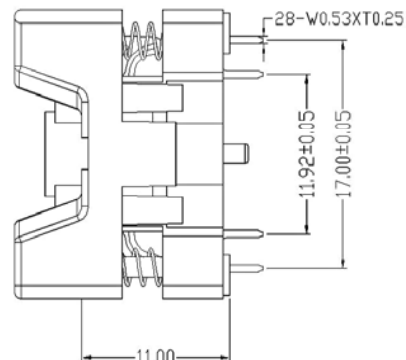
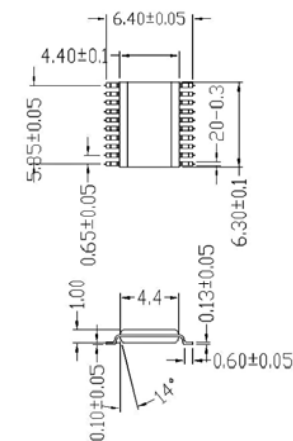


Insertion

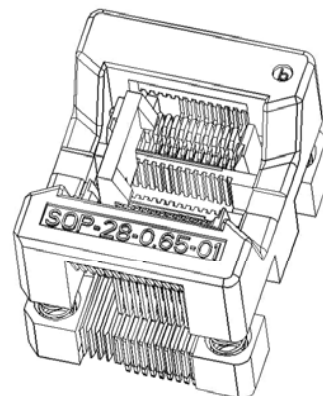

PCB PATTERN (Top View)

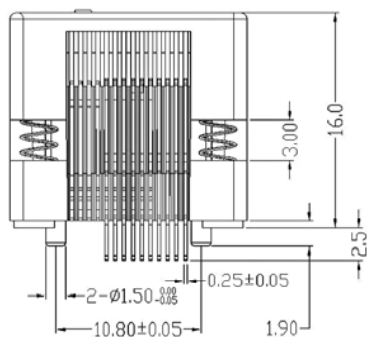

APPLICABLE IC

1. MATERIAL AND FINISH

1. SOCKET LID :PEI
2. SOCKET BASE :PEI
3. CONTACTS :BeCu,SELECTIVE Au-AuFLASH OVER NI PLATING
4. SPRINGS :STAINLESS STEEL ,PASSIVATED

2. PERFORMANCE

1. Insulation Resistance : 1000MΩ Min.AT DC 500V
2. Dielectric Withstanding Voltage For 1 minute AT AC 500V
3. Contact Resistance 30mΩ MAX. at 10mA and 20mV MAX.(Initial)
4. Operation Temperature -65°C~+150°C
5. Life Span 10,000 Times (Mechanical)
6. Operation Force 0.9 Kg MAX

△ C				DWG NO		PART NAME	SSOP20(4.4)-0.65	
△ B				MATERIAL	SCALE	1:1	TITLE	
△ A				QTY	UNIT	mm		
REV	DESCRIPTION	DATE	CHECK	SHEET	1 OF 1	REV	01	
APPLICATION				APPROVE	DATE	AIISOCKET		
ANGLES	FINISH	HOUSE	ME	0.X'±0.1	CHECK			DATE
ALL UNSPECIFIED CHAMFERS:0.2				0.XX'±0.05	DEGK			DATE
								DATE
						DATE	20140709	