


TOP VIEW

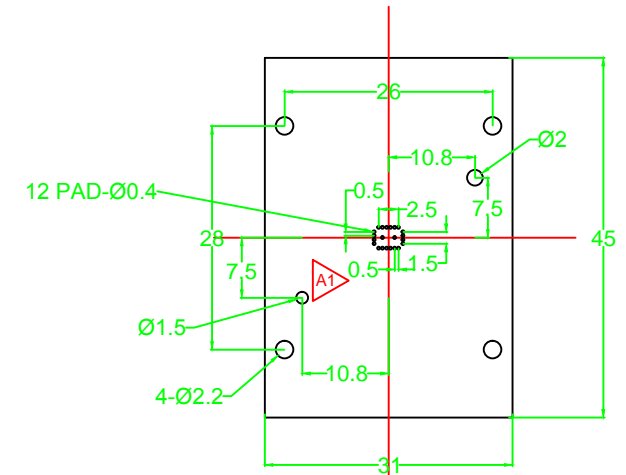

MATERIAL:
 1. LID: ALLOY
 2. BASE: ALLOY
 3. PLUNGER: BeCu, Au on Ni Plated
 4. SPRING: SWP-A/B, Au on Ni Plated

SPECIFICATION:
 1. CURRENT RATING: 2A MAX
 2. CONTACT RESISTANCE: 80 milliohms MAX
 3. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC for one minute
 4. BANDWIDTH: 6.1Ghz@-2dB
 5. OPERATION TEMPERATURE: -40 ~ +155
 6. LIFE SPAN: 50,000 Cycles (Mechanical)

REV		DESCRIPTION	DATE	BY	CHKD	APP'D	QTY	UNIT	PRICE	TOTAL	PART NAME	TITLE
1											AS-GD-QFN139-CL	
2												
3												
4												
5												
6												
7												
8												
9												
10												
11												
12												
13												
14												
15												
16												
17												
18												
19												
20												
21												
22												
23												
24												
25												
26												
27												
28												
29												
30												
31												
32												
33												
34												
35												
36												
37												
38												
39												
40												
41												
42												
43												
44												
45												
46												
47												
48												
49												
50												
51												
52												
53												
54												
55												
56												
57												
58												
59												
60												
61												
62												
63												
64												
65												
66												
67												
68												
69												
70												
71												
72												
73												
74												
75												
76												
77												
78												
79												
80												
81												
82												
83												
84												
85												
86												
87												
88												
89												
90												
91												
92												
93												
94												
95												
96												
97												
98												
99												
100												

ALLSOCKET