
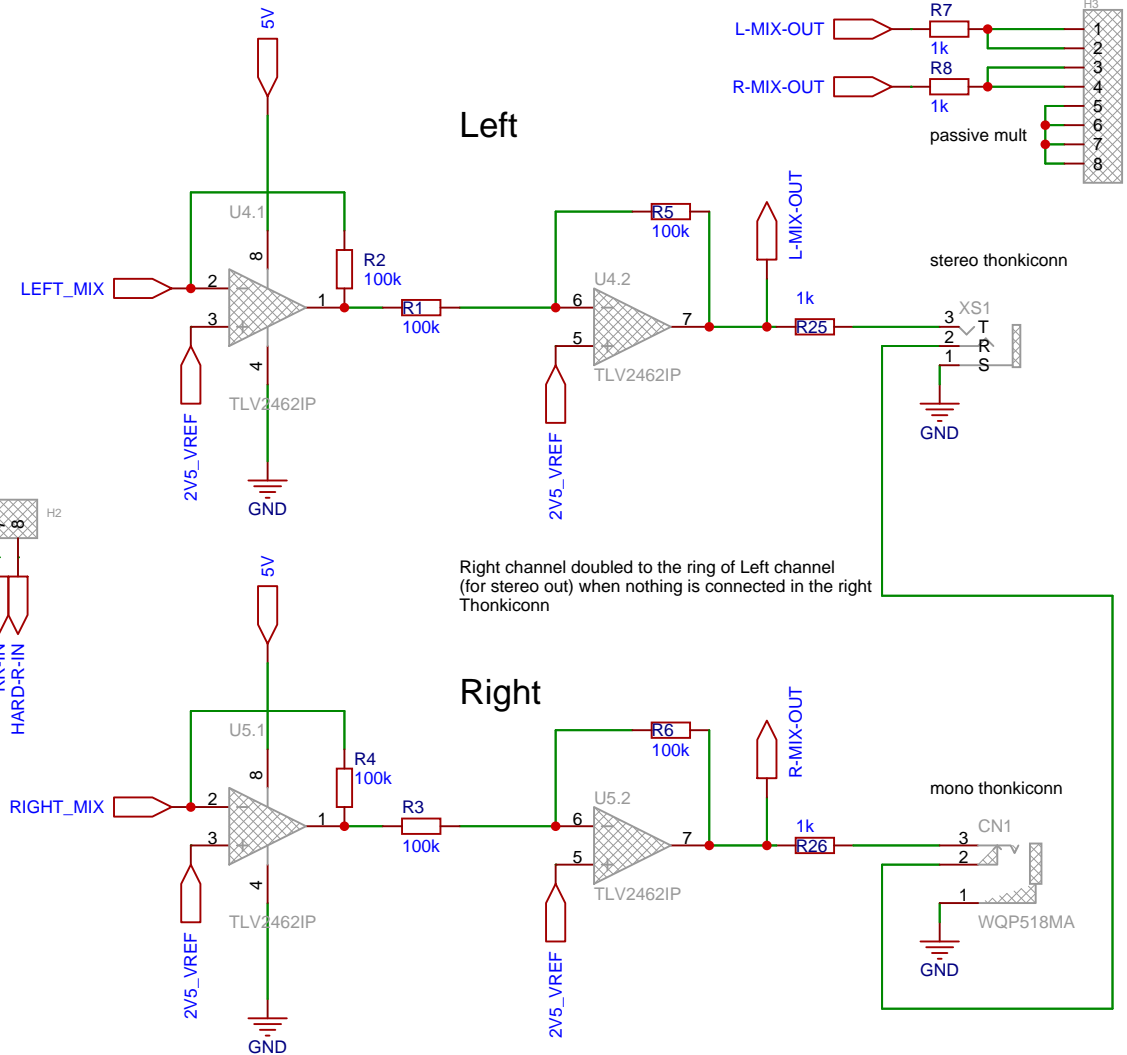



variable resistance mixer
uses the resistor values from 'Nearness'
and the HP filter from 'Mixer Image'
Ideally, resistors should be 0.1% tolerance
(except 1.69M, which is 1%)

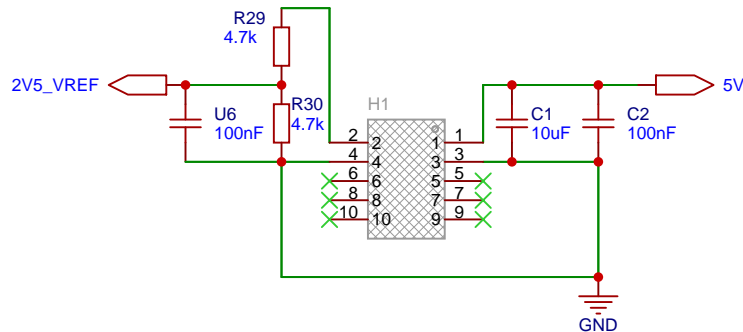


Left

Right

Right channel doubled to the ring of Left channel
(for stereo out) when nothing is connected in the right
Thonkiconn

TLV2462 should be interchangeable
with an MCP6002, although the 2462
is preferred (higher quality output)

Schematic	Schematic1			Update Date	2024-12-30
				Create Date	2024-12-04
Page	P1			Part Number	JLCPCB-002
Drawn	EasyEDA	mixor-image			
Reviewed	EasyEDA				
		VER	SIZE	PAGE	1 OF 1
		V0.1	A4	EasyEDA.com	