



Strut Profile PG15 基础框架型材 15系列




15x15 2 slots
15x15 2槽




15x30 3 slots
15x30 3槽

Strut profile PG15 featuring 6mm T-slot is designed for constructing light weight assemblies and developed to complement the PG20 and PG30 profiles.
基础框架型材15系列，槽宽6mm，主要应用于轻负载结构。

15x15 2 slots
15x15 2槽



15x30 3 slots
15x30 3槽



Description 产品描述	Moment of Inertia 惯性矩 $I_x(\text{cm}^4)$	Moment of Inertia 惯性矩 $I_y(\text{cm}^4)$	Moment of Resistance 弯矩 $W_x(\text{cm}^3)$	Moment of Resistance 弯矩 $W_y(\text{cm}^3)$	Mass 重量 (kg/m)	Part No. 订购编号
Strut Profile PG15 15x15 2 slots 基础框架型材 15系列 15x15 2槽	0.2	0.4	0.3	0.5	0.4	1.11.15.015015.02
Strut Profile PG15 15x30 3 slots 基础框架型材 15系列 15x30 3槽	0.7	1.8	0.8	1.2	0.6	1.11.15.015030.03

Connector selection 推荐连接件



Angle Profile Bracket
挤压角铝 3.31




Inner Bracket
槽内直角件 3.41




Linear Bar Connector
槽内直线件 3.51

Strut Profile PG45
基础框架型材 45系列


45x45 R90 2 slots
45x45 R90 2槽




45x45 2 slots Type A
45x45 2槽 A型




45x45 2 slots Type B
45x45 2槽 B型




45x45 3 slots
45x45 3槽




45x45 4 slots Light
45x45 4槽 轻型



45x45 4 slots
45x45 4槽




45x45 4 slots Heavy
45x45 4槽 重型




Description 产品描述	Moment of Inertia 惯性矩 $I_x(\text{cm}^4)$	Moment of Inertia 惯性矩 $I_y(\text{cm}^4)$	Moment of Resistance 弯矩 $W_x(\text{cm}^3)$	Moment of Resistance 弯矩 $W_y(\text{cm}^3)$	Mass 重量 (kg/m)	Part No. 订购编号
Strut Profile PG45 45x45 R90 2 slots 基础框架型材 45系列 45x45 R90 2槽	10.5	6.4	3.5	2.4	1.5	1.11.45.045045.R90.02
Strut Profile PG45 45x45 2 slots Type A 基础框架型材 45系列 45x45 2槽 A型	12.9	12.9	5.7	5.7	1.9	1.11.45.045045.02A
Strut Profile PG45 45x45 2 slots Type B 基础框架型材 45系列 45x45 2槽 B型	13.7	12.1	6.1	5.4	1.9	1.11.45.045045.02B
Strut Profile PG45 45x45 3 slots 基础框架型材 45系列 45x45 3槽	12.9	12.1	5.7	5.4	1.8	1.11.45.045045.03
Strut Profile PG45 45x45 4 slots Light 基础框架型材 45系列 45x45 4槽 轻型	10.5	10.5	4.7	4.7	1.6	1.11.45.045045.04L
Strut Profile PG45 45x45 4 slots 基础框架型材 45系列 45x45 4槽	12.1	12.1	5.4	5.4	1.8	1.11.45.045045.04
Strut Profile PG45 45x45 4 slots Heavy 基础框架型材 45系列 45x45 4槽 重型	16.5	16.5	7.4	7.4	2.4	1.11.45.045045.04H

Strut Profile PG50 基础框架型材 50系列

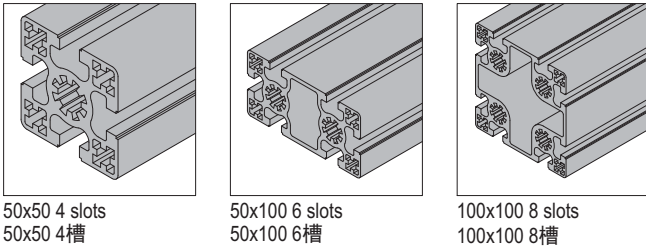


Strut profile PG50 featuring 10mm T-slot is designed for constructing heavy weight assemblies.
PG50 profile were developed to complement PG40 and PG45 profiles.
基础框架型材50系列，槽宽10mm，适用于重负载结构。


50x50 4 slots
50x50 4槽



50x100 6 slots
50x100 6槽

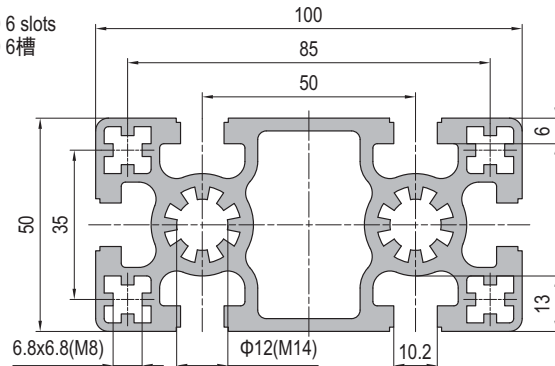

100x100 8 slots
100x100 8槽

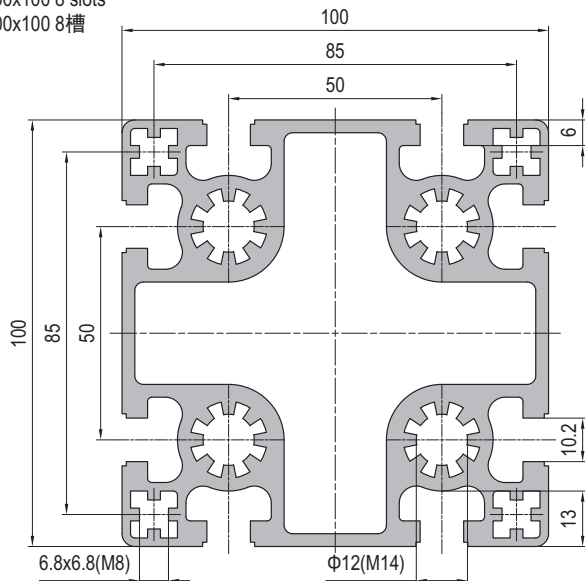

Connector selection 推荐连接件




Angle Profile Bracket 3.31
挤压角铝



Screw Connector 3.81
大螺栓

Description 产品描述	Moment of Inertia 惯性矩 $I_x(\text{cm}^4)$	Moment of Inertia 惯性矩 $I_y(\text{cm}^4)$	Moment of Resistance 弯矩 $W_x(\text{cm}^3)$	Moment of Resistance 弯矩 $W_y(\text{cm}^3)$	Mass 重量 (kg/m)	Part No. 订购编号
Strut Profile PG50 50x50 4 slots 基础框架型材 50系列 50x50 4槽	25.0	25.0	10.0	10.0	3.0	1.11.50.050050.04
Strut Profile PG50 50x100 6 slots 基础框架型材 50系列 50x100 6槽	46.2	184.4	18.5	36.9	5.0	1.11.50.050100.06
Strut Profile PG50 100x100 8 slots 基础框架型材 50系列 100x100 8槽	331.1	331.1	66.2	66.2	8.5	1.11.50.100100.08


Strut Profile PG60
基础框架型材 60系列



60x60 4 slots
60x60 4槽

Strut profile PG60 featuring 10mm T-slot is designed for constructing heavy weight assemblies.
PG60 profiles were also developed to complement PG40 and PG45 profiles.
基础框架型材60系列，槽宽10mm，适用于重负载结构。

60x60 4 slots
60x60 4槽

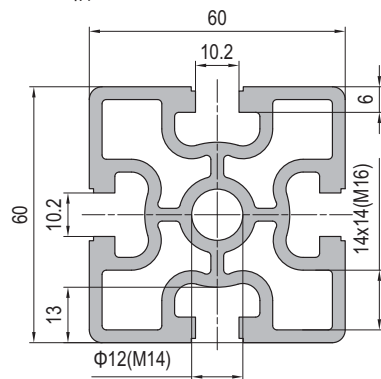

Connector selection
推荐连接件




Angle Profile Bracket 3.31
挤压角铝




Screw Connector 3.81
大螺栓

Description 产品描述	Moment of Inertia 惯性矩 $I_x(\text{cm}^4)$	Moment of Inertia 惯性矩 $I_y(\text{cm}^4)$	Moment of Resistance 弯矩 $W_x(\text{cm}^3)$	Moment of Resistance 弯矩 $W_y(\text{cm}^3)$	Mass 重量 (kg/m)	Part No. 订购编号
Strut Profile PG60 60x60 4 slots 基础框架型材 60系列 60x60 4槽	47.7	47.7	15.9	15.9	3.8	1.11.60.060060.04

Protective Grille Profile PG40 防护网型材 40系列



40x40 1 Grille slot
40x40 1槽




40x60 2 Grille slots
40x60 2槽


Protective Grille Profile could insert not only the meshes, but also the panels, and the spring clamping nut will be used if inserting panels (the recommended distance of nut is 300mm).

防护网型材既可安装编织网、焊接网又可安装有机玻璃、亚克力等板状物。安装板状物时需配合夹板弹片使用(建议间距为300mm)。

40x40 1 Grille slot
40x40 1槽



40x60 2 Grille slots
40x60 2槽

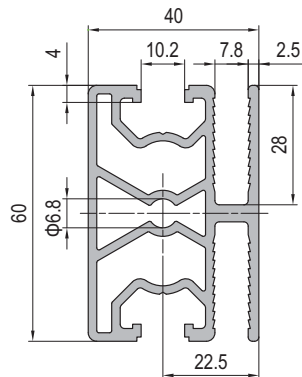

Connector selection 推荐连接件



Bolt Connector3.81.M8.20
螺栓连接件



Anti-torsion Subsequent Nut2.32.10.M6
防扭后置螺母



End Cap for grille profile4.13.40.4040.SM
改制防护网端盖

Machine Guard System
机械防护系统样册



Description 产品描述	Moment of Inertia 惯性矩 $I_x(\text{cm}^4)$	Moment of Inertia 惯性矩 $I_y(\text{cm}^4)$	Moment of Resistance 弯矩 $W_x(\text{cm}^3)$	Moment of Resistance 弯矩 $W_y(\text{cm}^3)$	Mass 重量 (kg/m)	Part No. 订购编号
Protective Grille Profile PG40 40x40 1 Grille slot 防护网型材 40系列 40x40 1槽	9.9	8.1	4.9	4.0	1.6	1.22.40.040040.01
Protective Grille Profile PG40 40x60 2 Grille slots 防护网型材 40系列 40x60 2槽	23.3	13.6	11.6	4.5	2.0	1.22.40.040060.02