

BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER AND PUSH START CLUTCH TYPE SERIES

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.


MY8 / MY7 Series



(Optional)




External Dimension

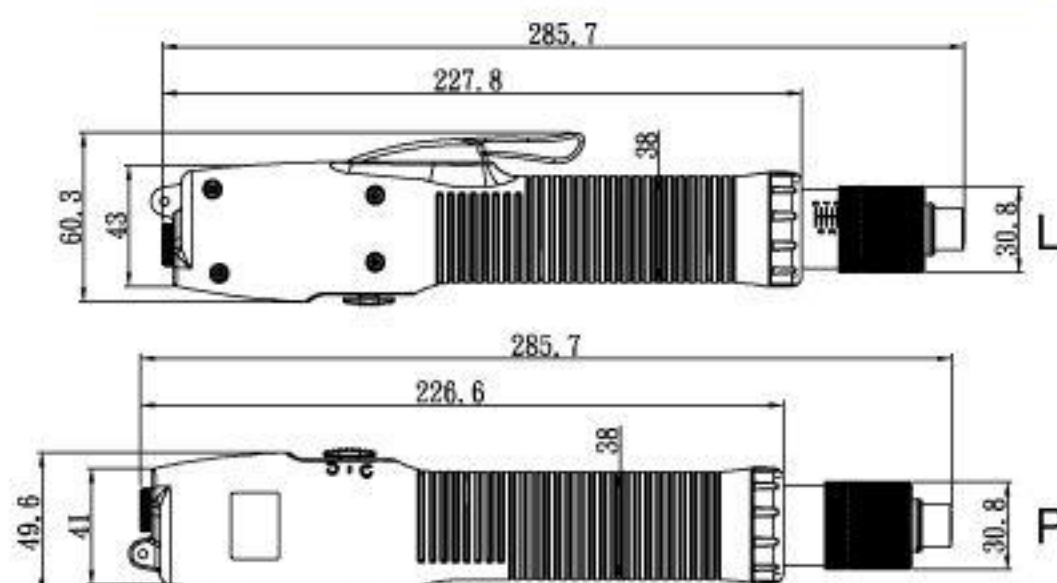

Unit: mm

Torque Range Reference Chart

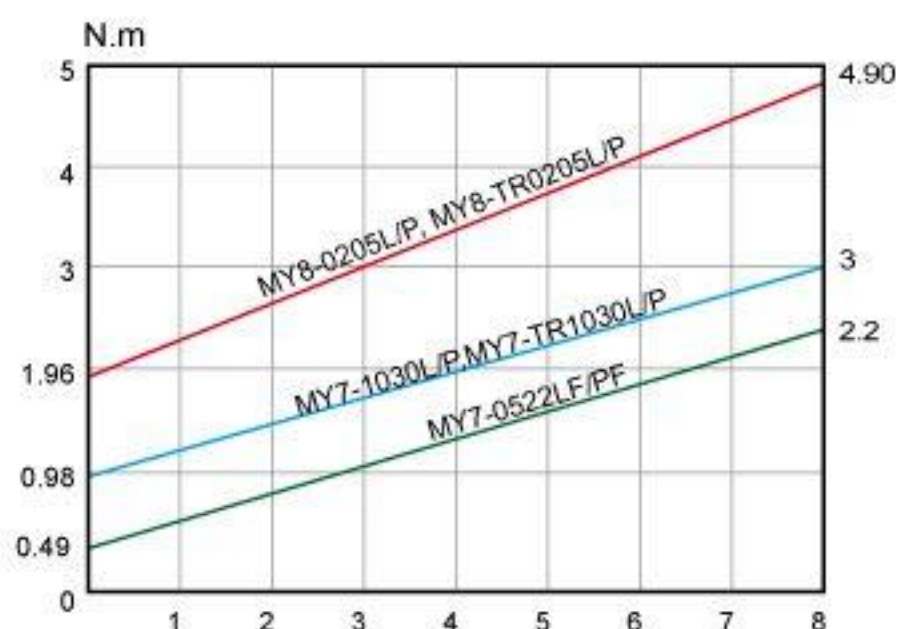

Accessories



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (g)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MY8-0205L MY8-0205P	1.96~4.90	1.96~3.92	±3%	1000	-	4.0~5.0	≤4	790	290	MYP40-500	B、B 9.5
MY7-1030L MY7-1030P	0.98~2.94	0.98~2.35	±3%	1200	900	2.6~4.0	2.6~3.5	790	290	MYP32-300	A、B、B 9.5
MY7-0522LF MY7-0522PF	0.49~2.16	-	±3%	2000	-	2.6~4.0	2.6~3.5	790	290	MYP32-300	A、B、B 9.5

※ CE (Not included MY7-0522LF/PF)
RoHS

