

BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER AND PUSH START CLUTCH TYPE SERIES


MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.

MY9 Series




(Optional)

External Dimension

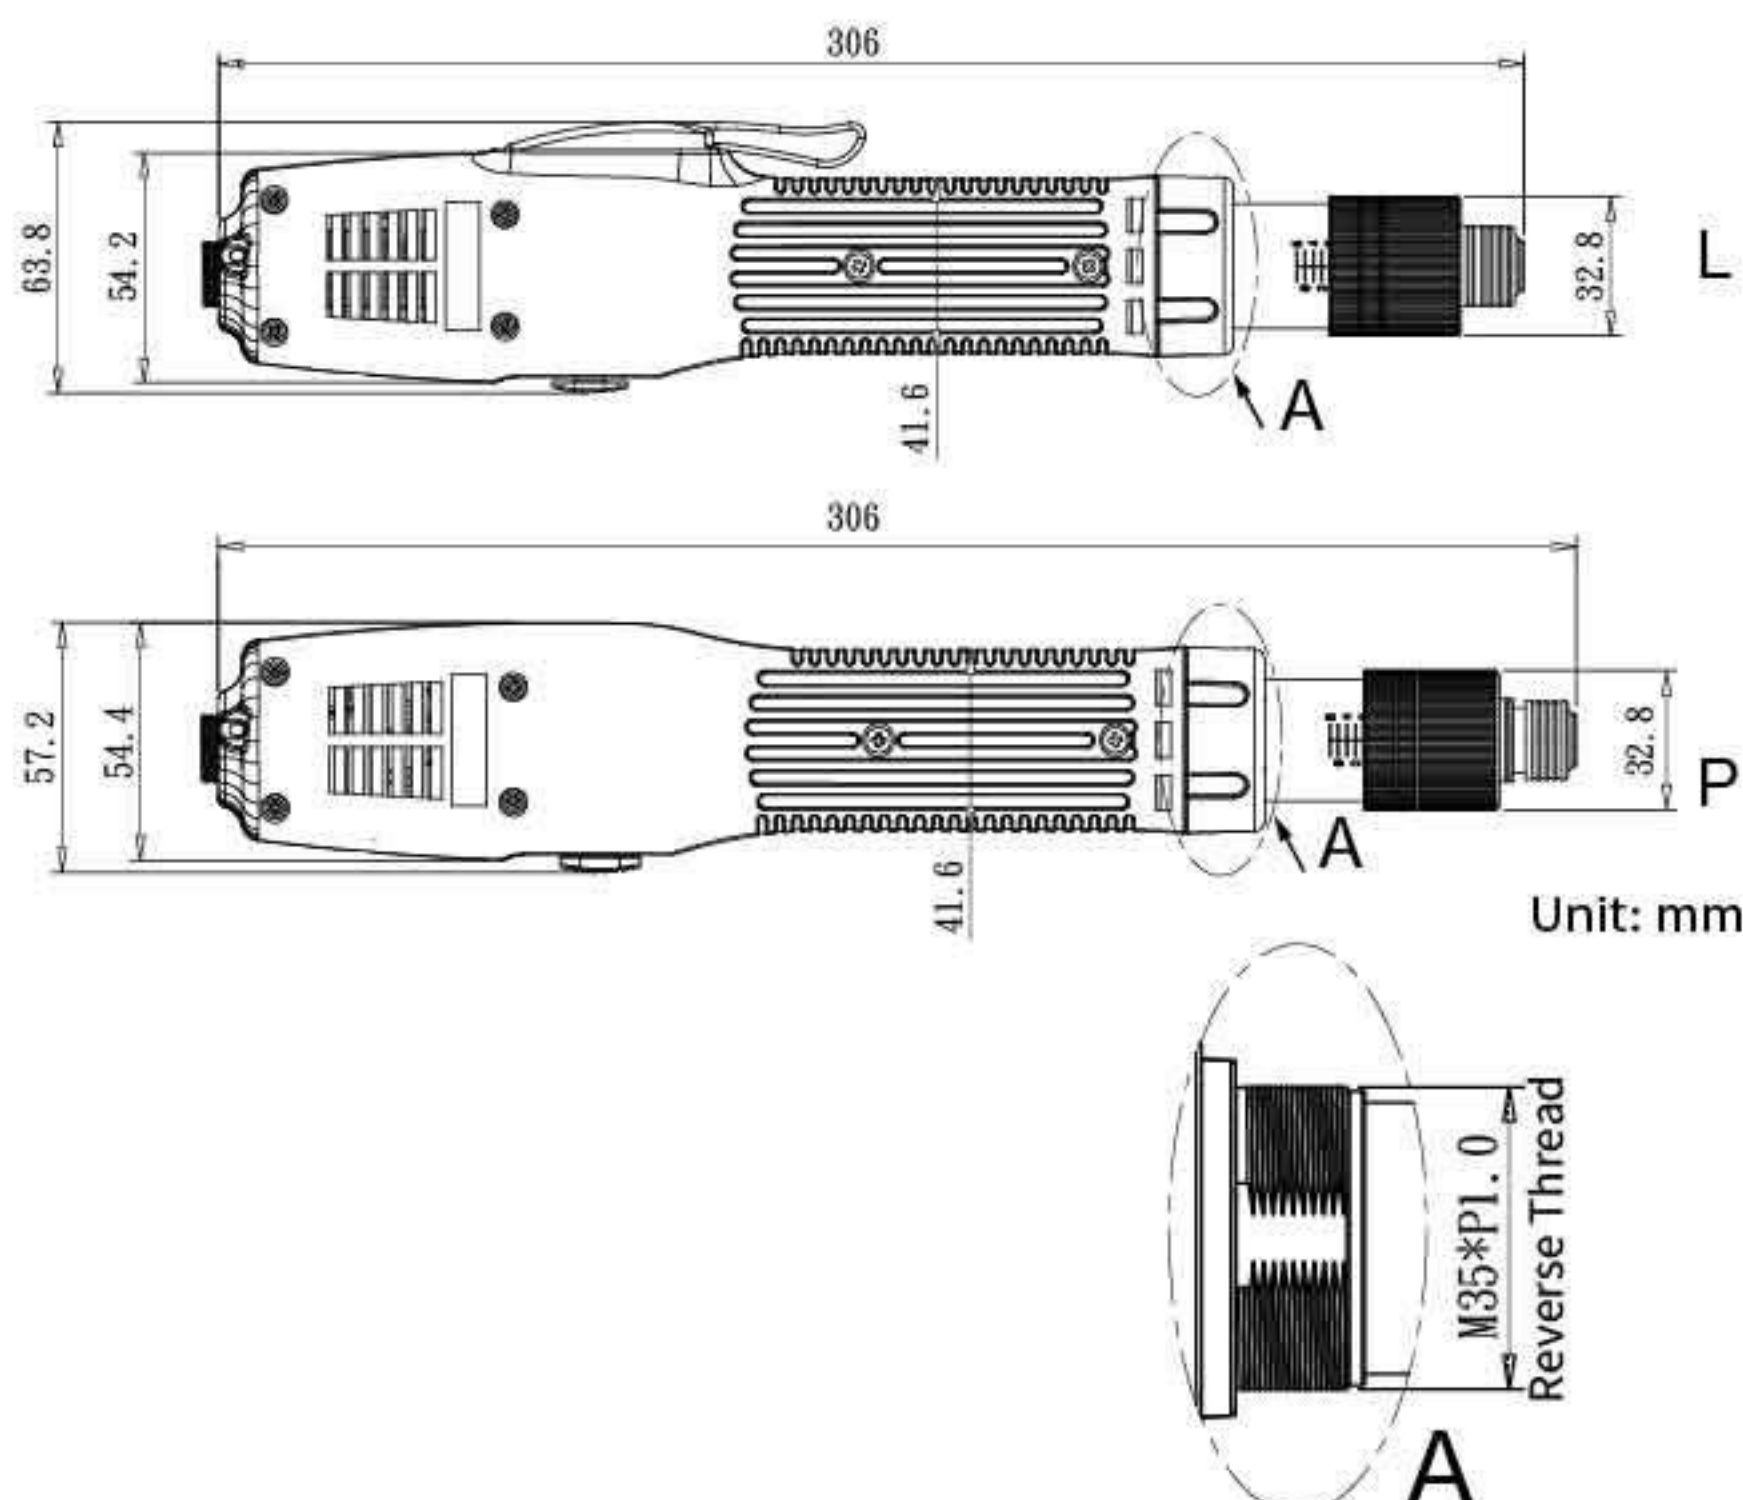

Unit: mm

Torque Range Reference Chart

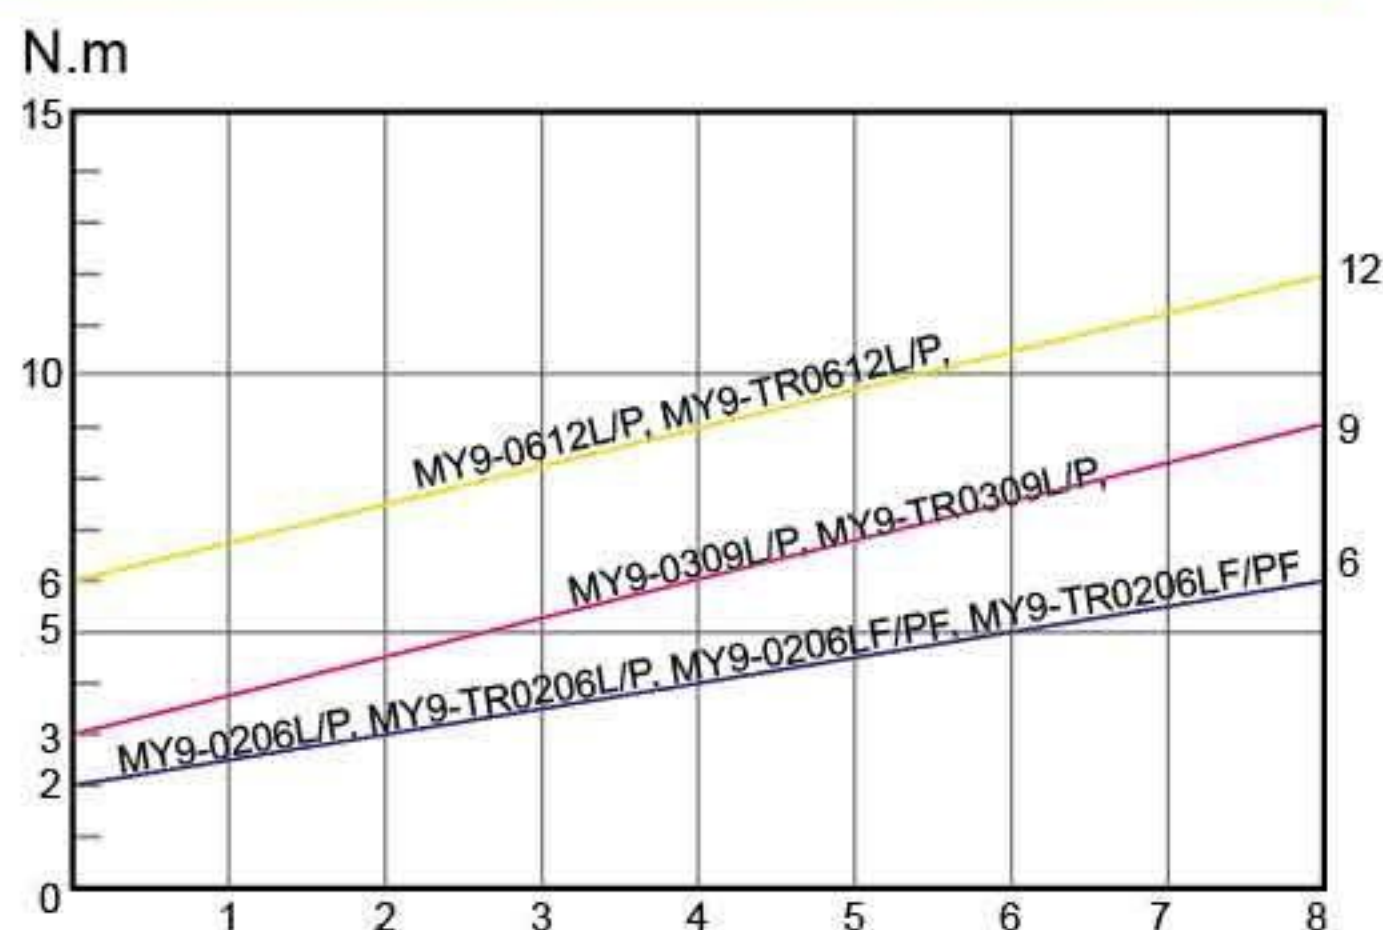

Accessories

Power Controller
MYP40-1500



Torque Locker
KC-27-1A



Screwdriver Holder
KH-6



Spring Balancer
KL-2000



Spiral Cable



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (kg)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MY9-0206L MY9-0206P	2~6	2~4.8	±5%	1000	-	4.0~5.0	≤4	1.03	306	MYP40-1500	B、B 9.5
MY9-0206LF MY9-0206PF	2~6	2~4.8	±5%	2000	-	4.0~5.0	≤4	1.03	306	MYP40-1500	B、B 9.5
MY9-0309L MY9-0309P	3~9	3~7.2	±5%	1000	-	≤6	≤5	1.03	306	MYP40-1500	B、B 9.5
MY9-0612L MY9-0612P	6~12	6~9.6	±5%	880	-	≤8	≤6	1.03	306	MYP40-1500	B、B 9.5

※CE、RoHS

