


BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER CLUTCH TYPE SERIES

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.

MYT Series




External Dimension

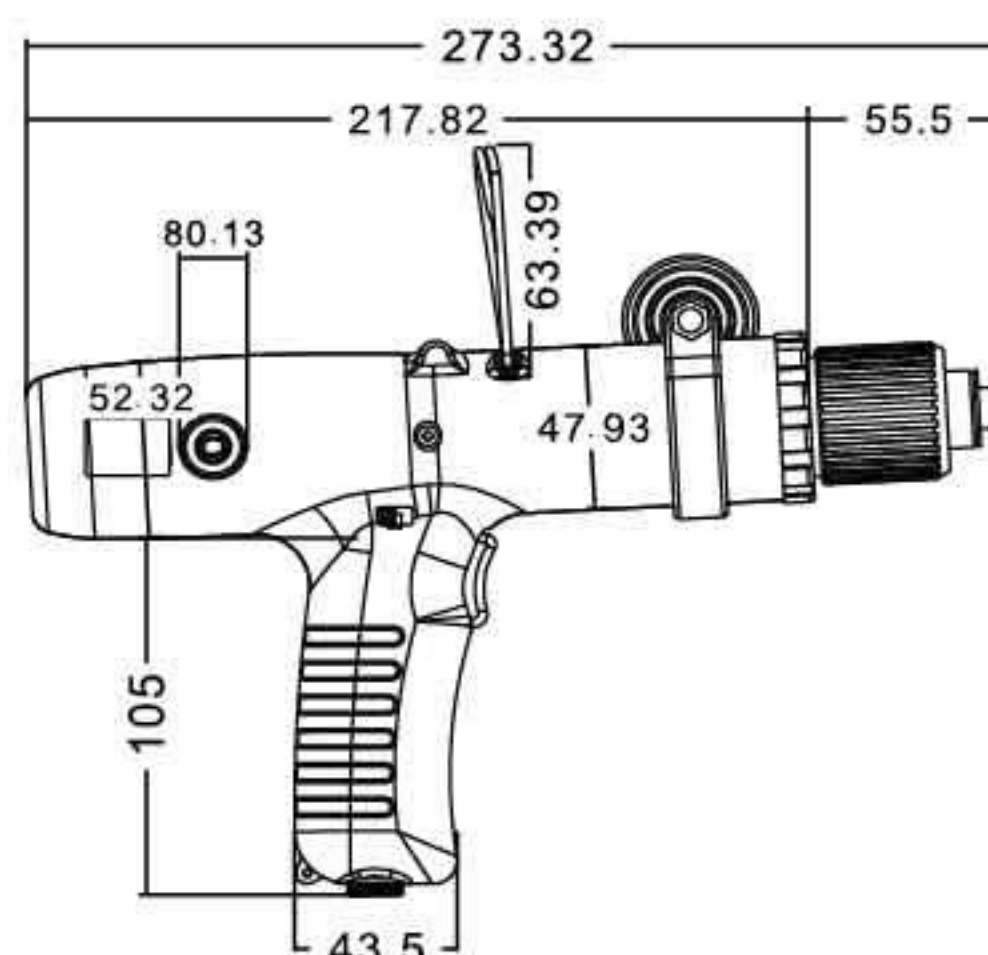

Unit: mm

Torque Range Reference Chart

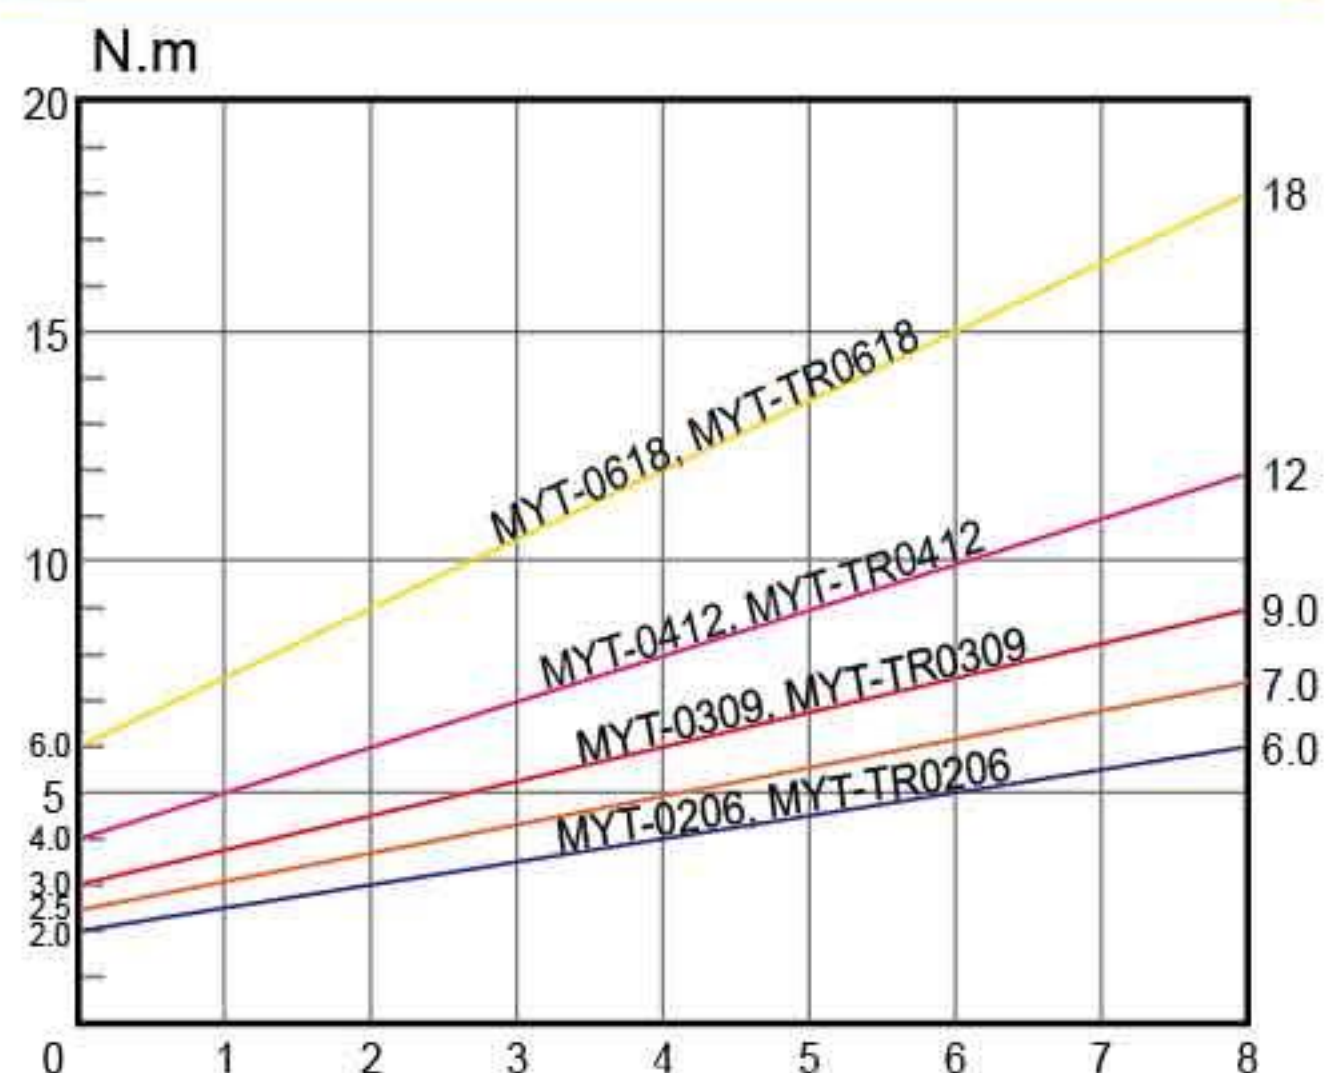

Accessories

Torque Locker
KC-21A



Screwdriver Holder
KH-7



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (kg)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MYT-0206	2~6	2~4.8	±5%	1000	-	4.0~5.0	≤4	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"
MYT-0309	3~9	3~7.2	±5%	800	-	5.0~6.0	≤4.5	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"
MYT-0412	4~12	4~9.6	±5%	550	-	≤8	≤6	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"
MYT-0618	6~18	6~14.4	±5%	350	-	≤10	≤8	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"

※CE、RoHS

