


MYBT-EP Series



MYBT-EP0612

External Dimension

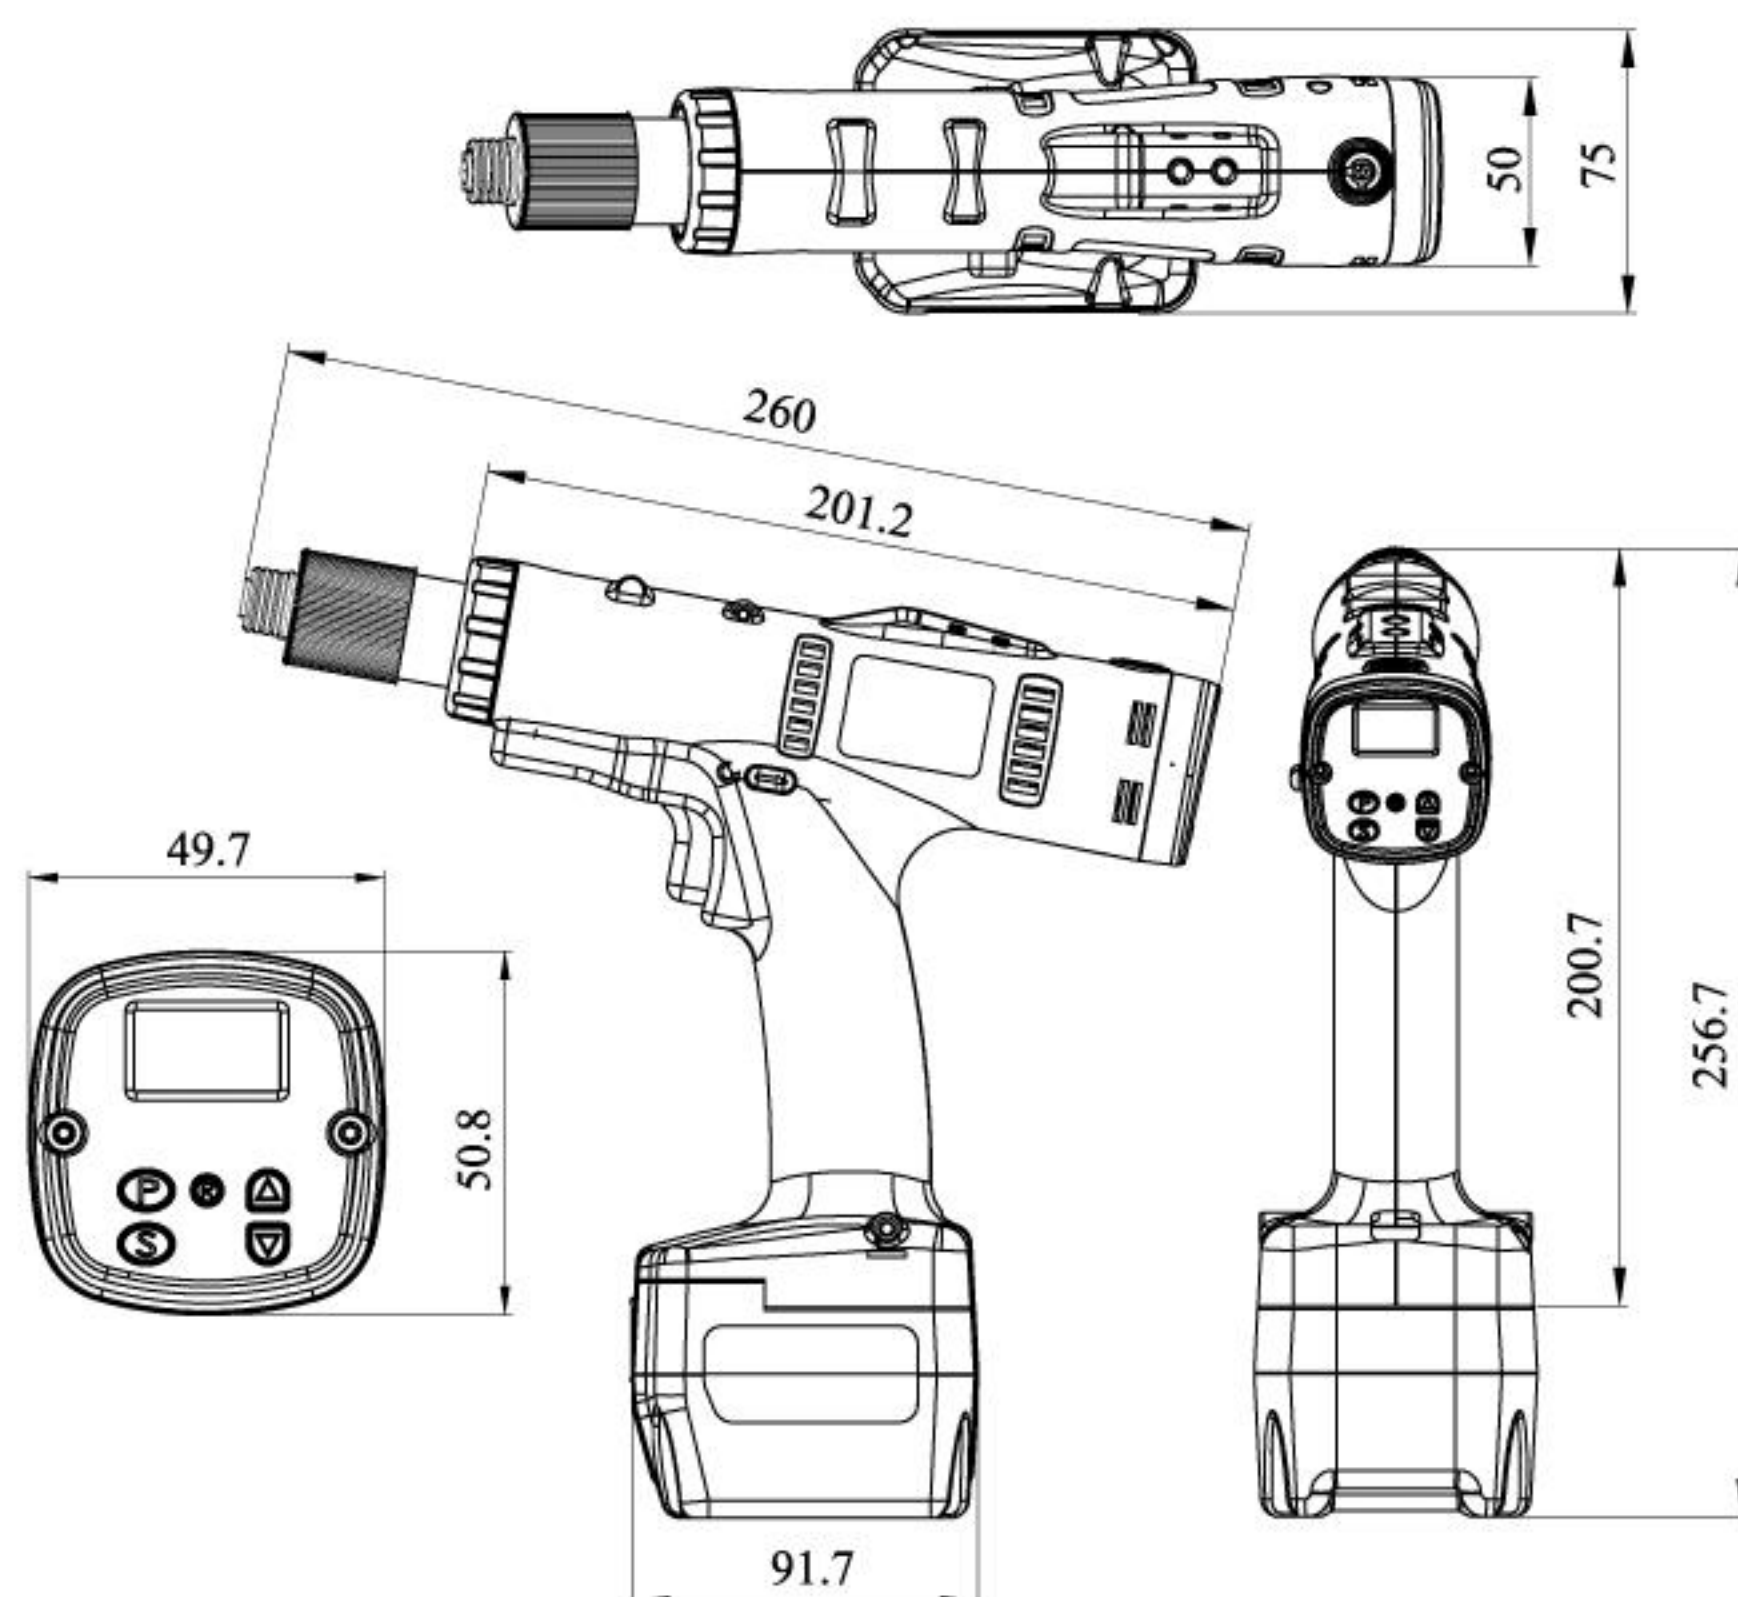


MYBT-EP0612
Unit: mm

Features


- LED illumination to light up dark areas
- Status LED to indicate users tightening results
- 10x lifespan long-lasting contactless micro switch trigger
- Built-in error-proof function to avoid costly human errors
- The durable auto shut off clutch guarantee 2 million tightening
- Smart in-process control to lock the screwdriver when an error occurred
- The sophisticated auto shut off clutch provides outstanding $\pm 3\%$ torque accuracy
- Adopted maintenance-free brushless motor for clean, quiet, and accurate operation
- A fully charged 18V lithium-ion battery can tighten up to 1,500 screws
- Auto cut off when low battery to avoid insufficient torque applied to screws
- 40 minutes quick charge

Torque Range Reference Chart

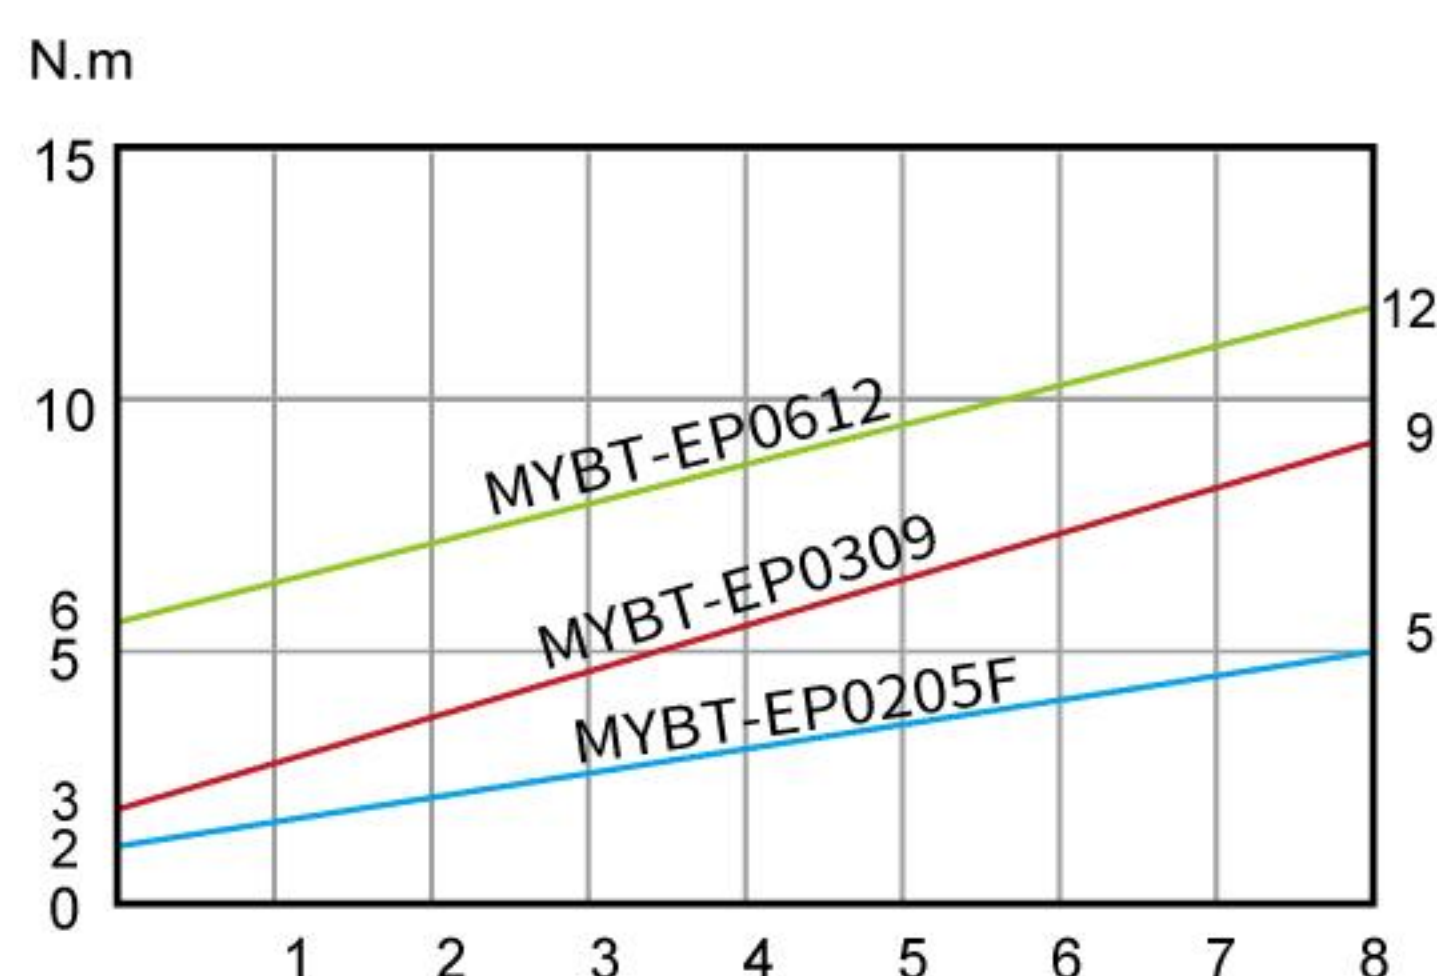

Specifications

Model	Input Voltage	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m) $\pm 10\%$	Weight (kg)	Size (mm)	Applicable Battery	Applicable Charger	Applicable Torque Meter	Bit Type
		Hard Joint	Soft Joint								
MYBT-EP0205F	18V	2~5	2~4	$\pm 3\%$	660~2200	1.2	260X200	SKC-LB1830C	MYCS-ID80-D	KTM-150	B、B9.5 W 3/8"
MYBT-EP0309	18V	3~9	3~7.2	$\pm 3\%$	300~1000	1.2	260X200	SKC-LB1830C	MYCS-ID80-D	KTM-150	B、B9.5 W 3/8"
MYBT-EP0612	18V	6~12	6~9.6	$\pm 3\%$	260~880	1.2	260X200	SKC-LB1830C	MYCS-ID80-D	KTM-150	B、B9.5 W 3/8"

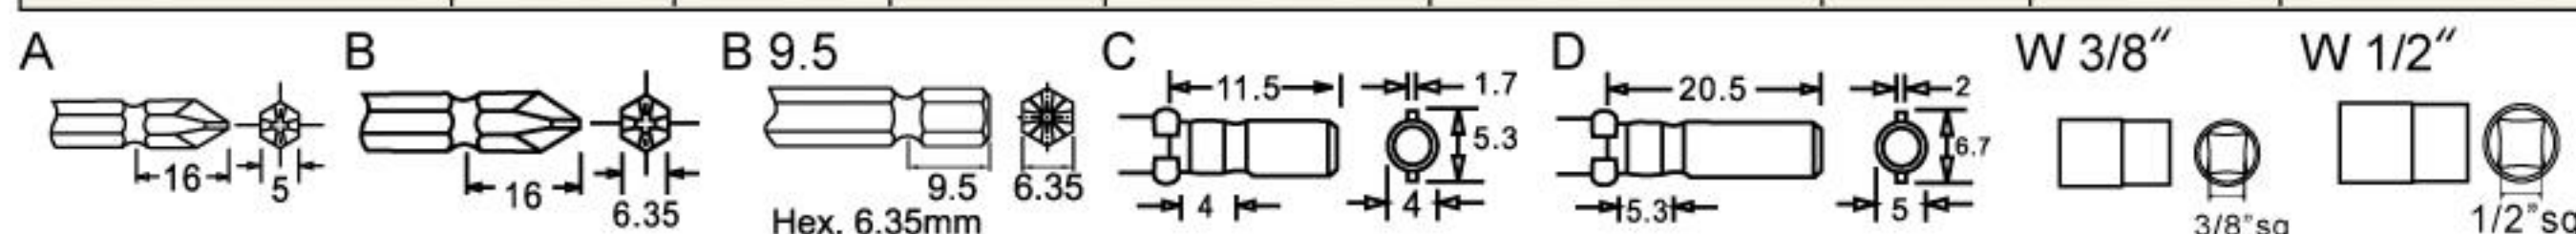

- ※Free load speed will be fixed when battery volume is more than 17V (17~21V)
- ※Tool Weight & Size indications without battery.