

HANDY AUTOMATIC INDUSTRIAL CORDLESS SCREWDRIVER BRUSHLESS LOW TORQUE


MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.

MYBT-HD Series



MYBT-HD1545

External Dimension

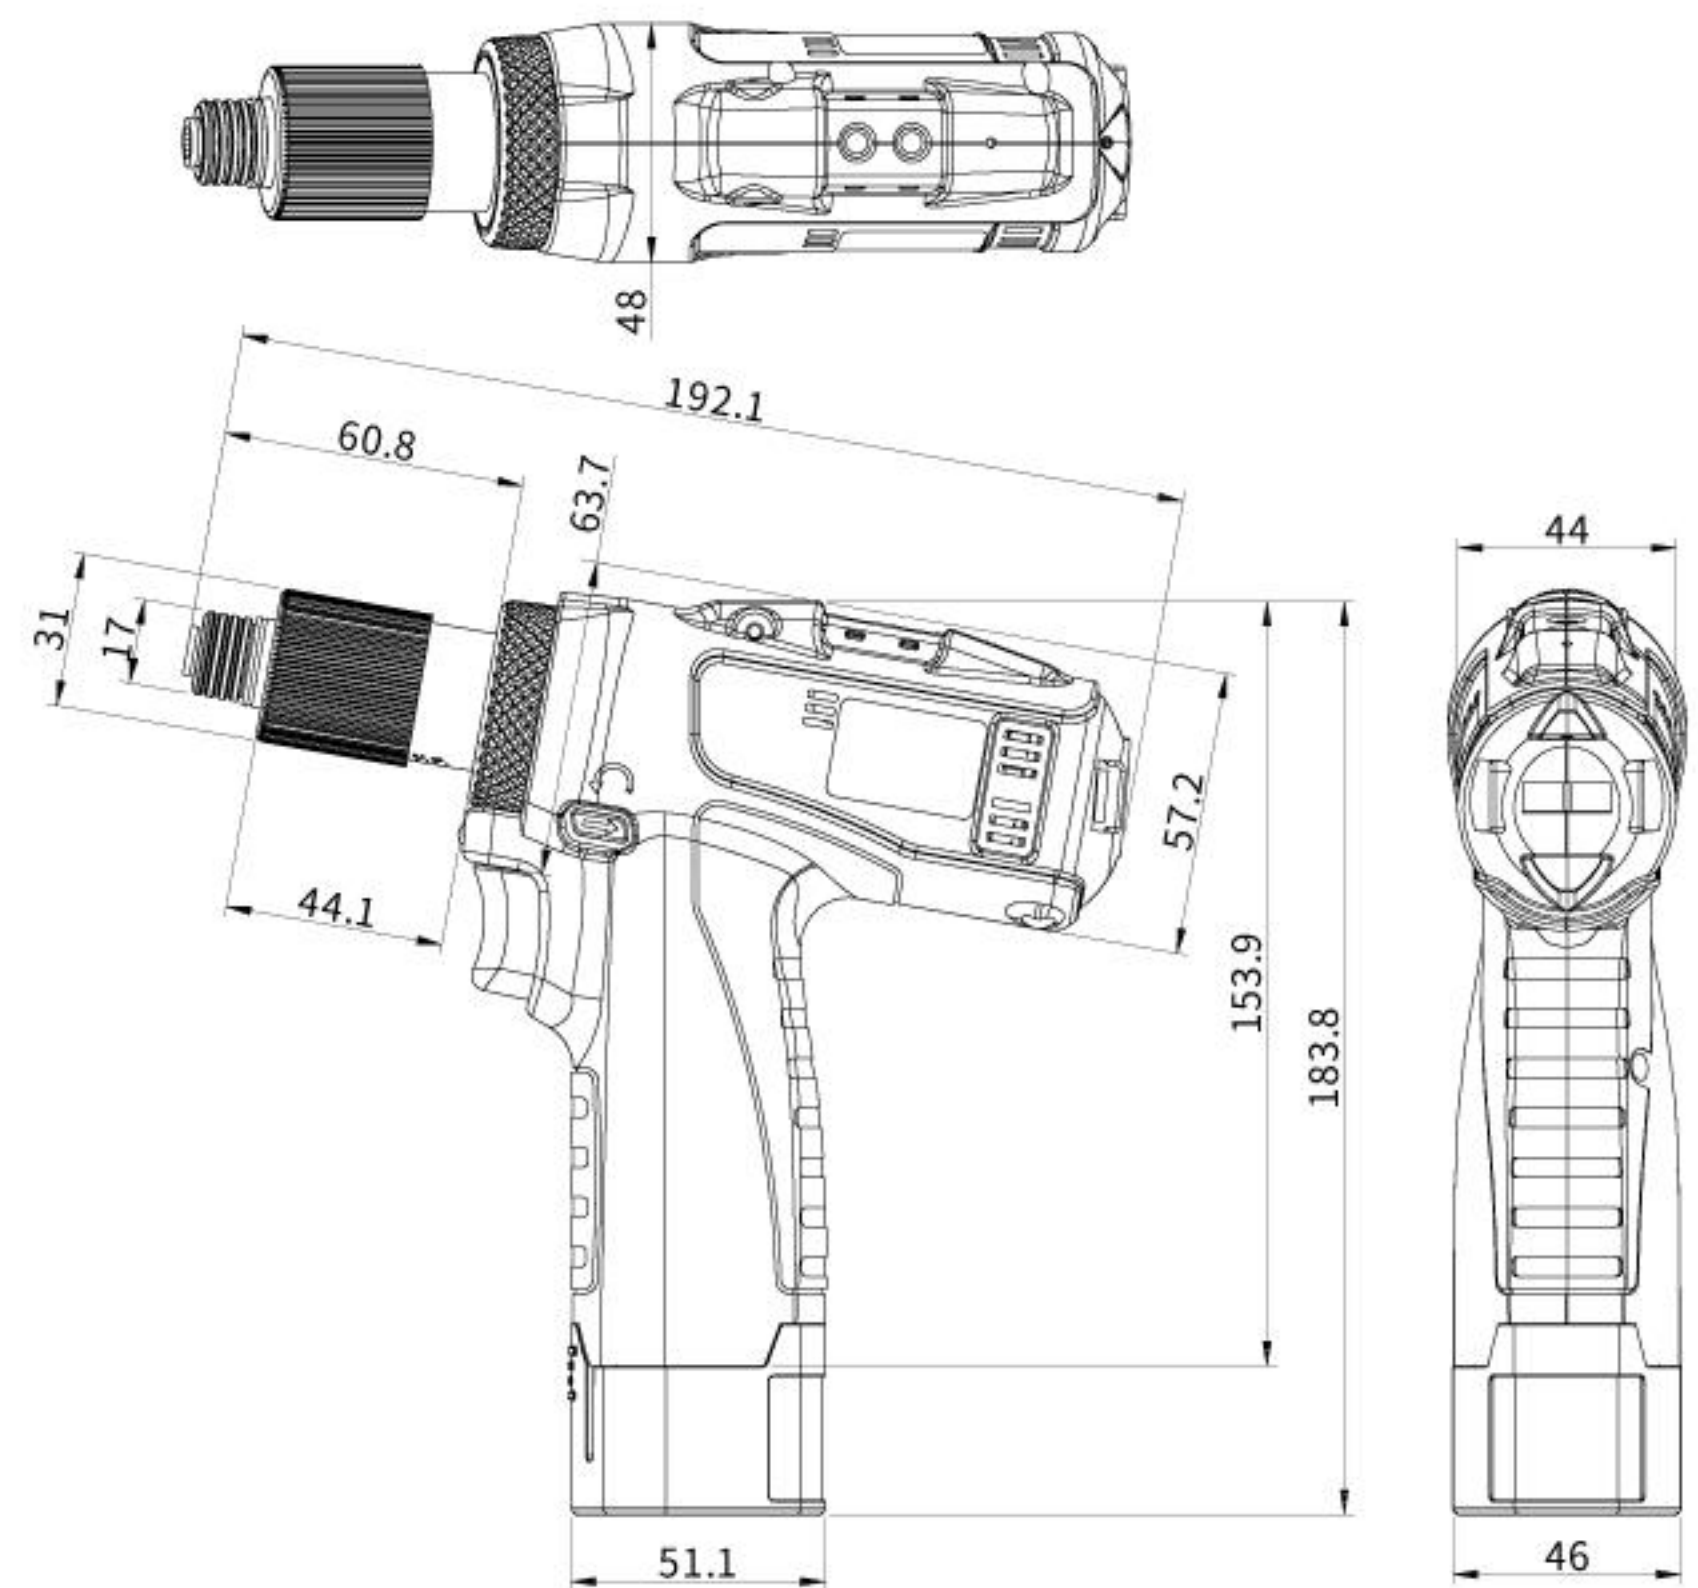

MYBT-HD1545


Unit: mm

Features


- Compact light weight ergonomic design.
- Cleaner quieter maintenance free brushless motor.
- Most ideal for areas where cables and hoses impede handling flexibility i.e. car interior electrical cabinet interiors. trains.
- 10.8V Lithium-ion battery.

Specifications

Torque Range Reference Chart

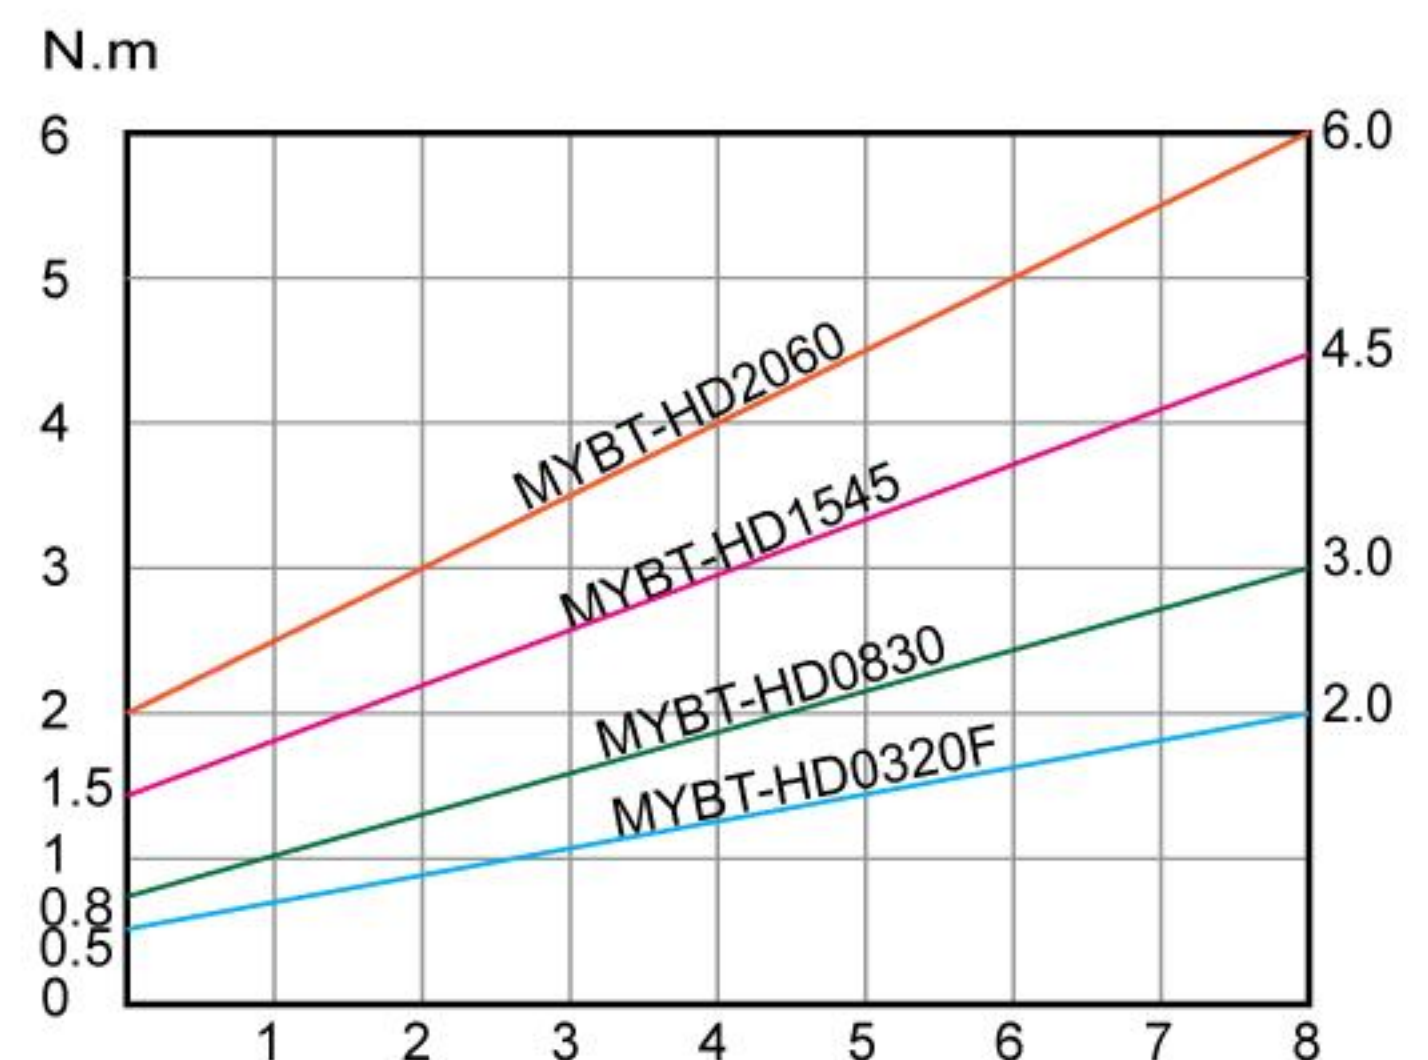

Model	Input Voltage	Torque(N.m)		Repeatability Torque Accuracy(%)	Free Speed (r.p.m)		Weight (kg)	Size (mm)	Applicable Battery	Applicable Charger	Bit Type
		Hard Joint	Soft Joint		HI	LO					
MYBT-HD0320F	10.8V	0.5-2.0	0.5~1.6	±3%	2700	-	0.7	189X157	SKC-LB1030S	MYCS-ID50	A、B9.5
MYBT-HD0830	10.8V	0.8-3.0	0.8-2.4	±3%	1400	1000	0.7	189X157	SKC-LB1030S	MYCS-ID50	A、B9.5
MYBT-HD1545	10.8V	1.5-4.5	1.5-3.6	±3%	800	550	0.7	189X157	SKC-LB1030S	MYCS-ID50	A、B9.5
MYBT-HD2060	10.8V	2.0-6.0	2.0-4.8	±3%	650	450	0.7	189X157	SKC-LB1030S	MYCS-ID50	B9.5

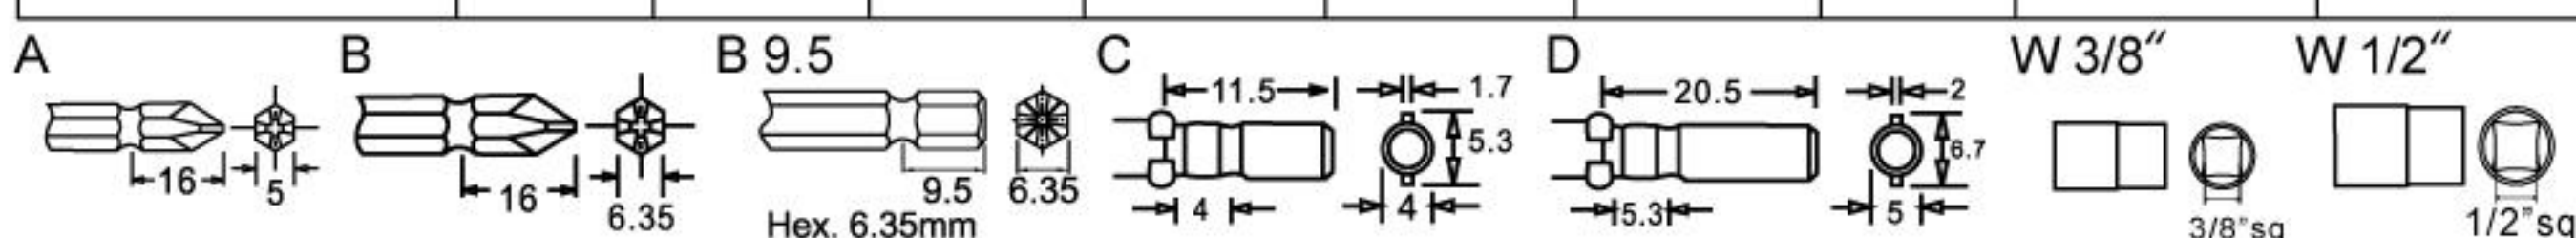

※Tool Weight & Size indications without battery.