



MYBT-NR Series




External Dimension

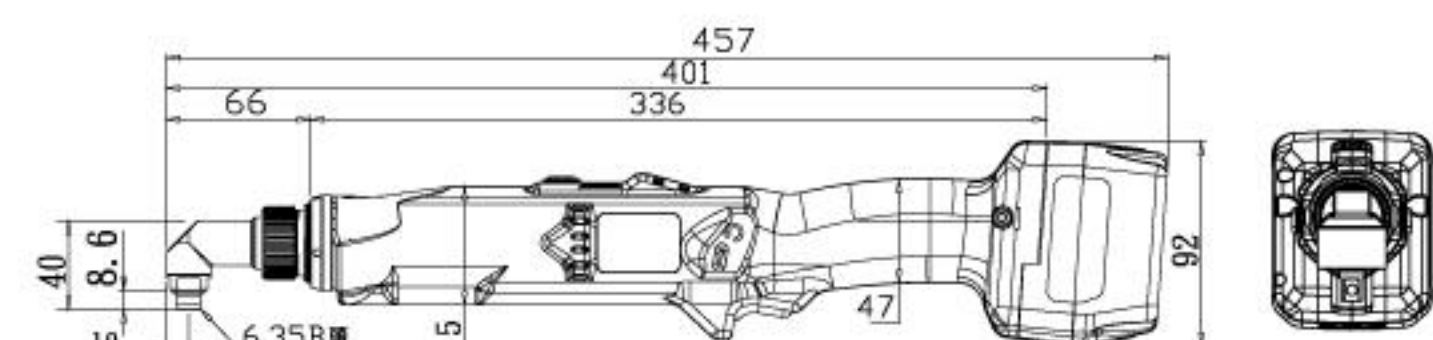


MYBT-NR0205F
MYBT-NR2507

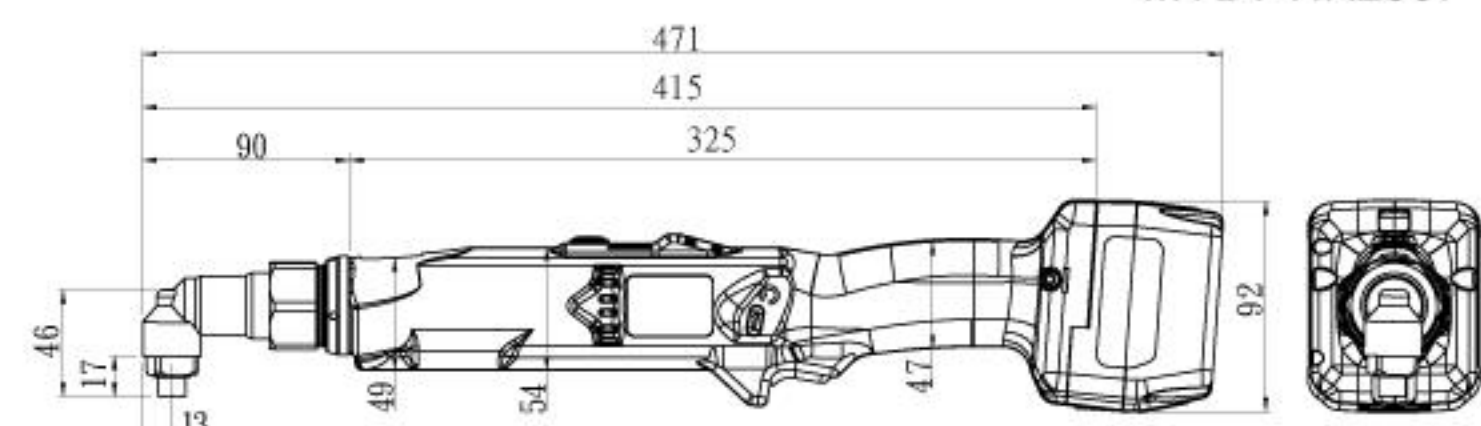


MYBT-NR0612

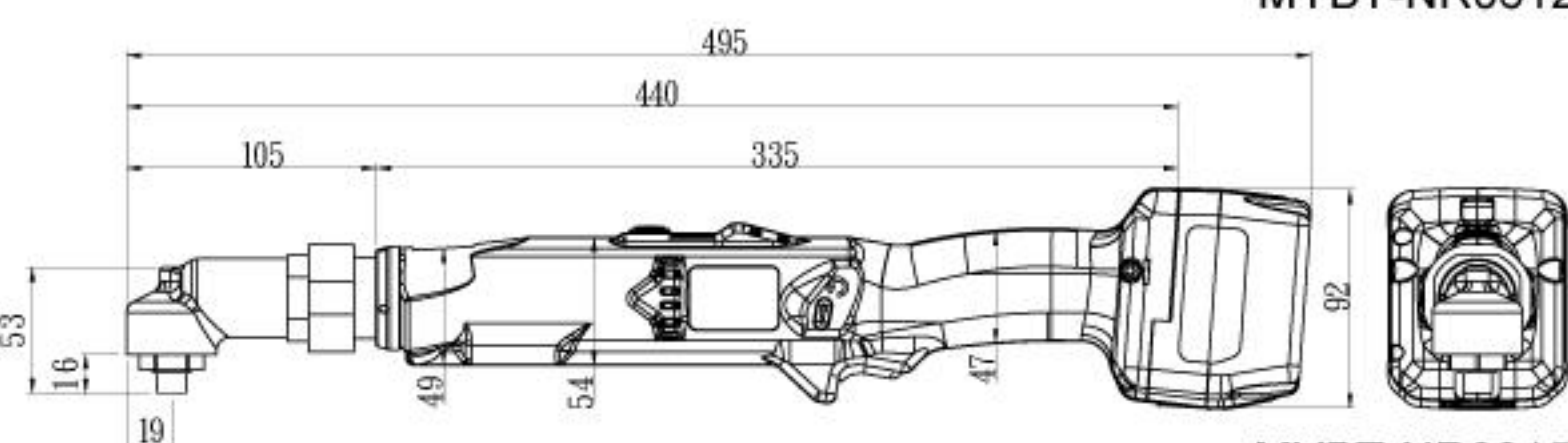

MYBT-NR0815

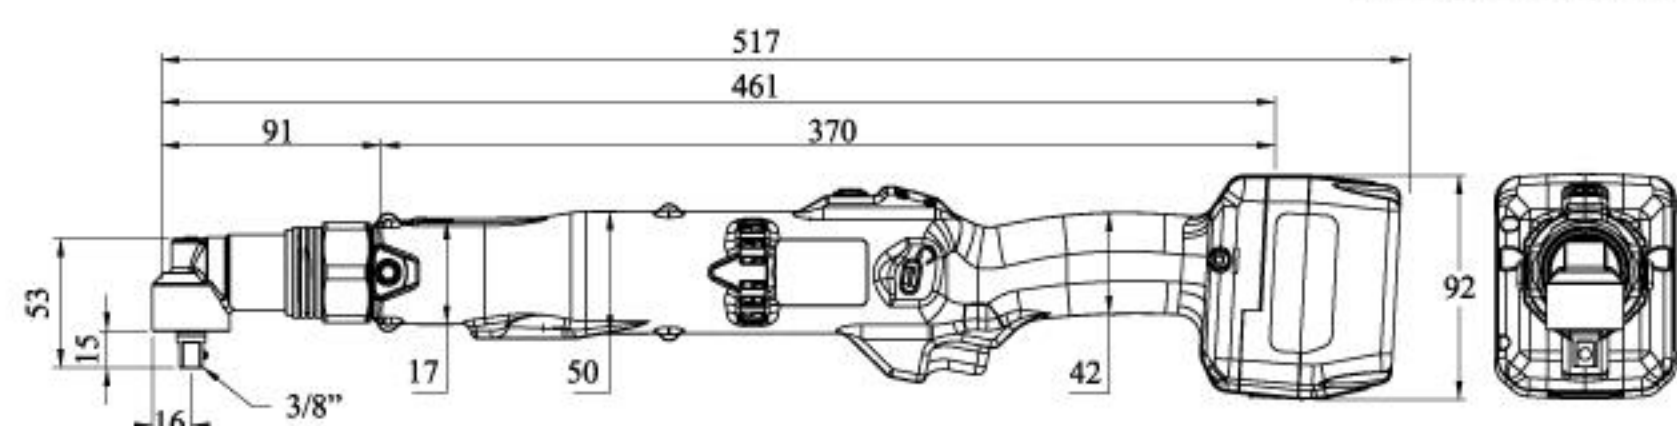

MYBT-NR0308F
MYBT-NR0515F
MYBT-NR1230

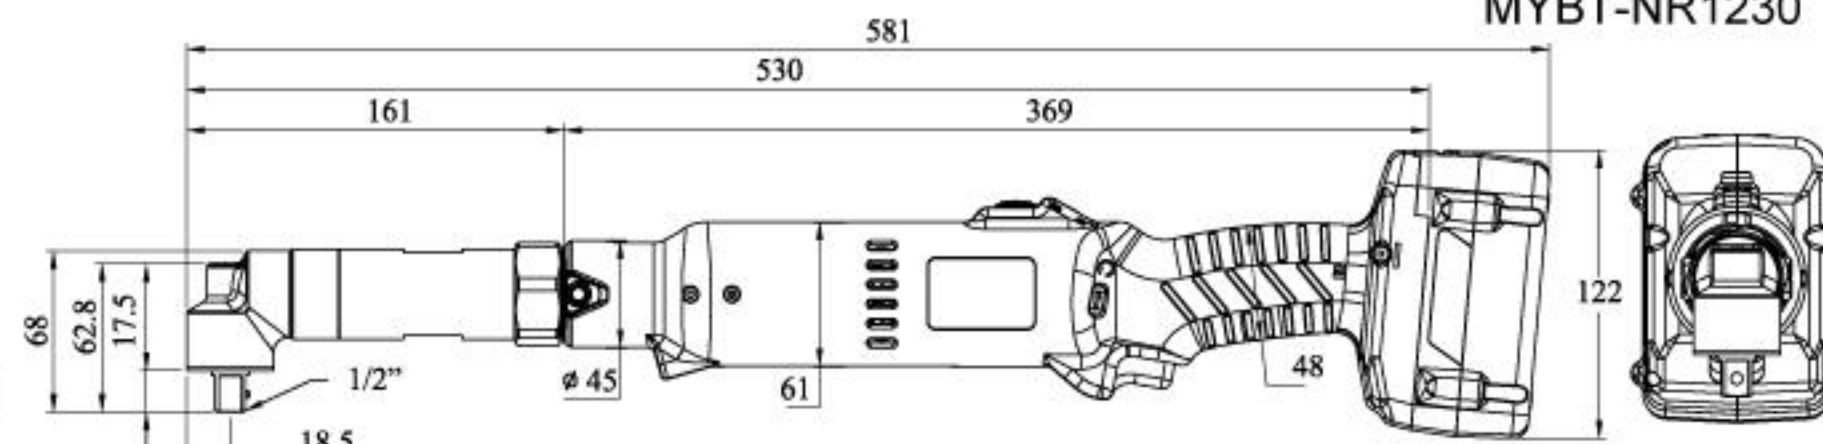

MYBT-NR1545
MYBT-NR2560


Unit: mm

Features

- LED illumination to light up dark areas
- Status LED to indicate users tightening results
- 10x lifespan long-lasting contactless micro switch trigger
- The durable auto shut off clutch guarantee 1 million tightening
- Most ideal assembly tool for workstations with our power socket and air hoses
- The sophisticated auto shut off clutch provides outstanding $\pm 5\%$ torque accuracy
- Adopted maintenance-free brushless motor for clean, quiet, and accurate operation
- A fully charged 18V lithium-ion battery can tighten up to 500 screws
- Auto cut off when low battery to avoid insufficient torque applied to screws
- 40 minutes quick charge

Specifications

Model	Input Voltage	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Weight (kg)	Length (mm)	Applicable Battery	Applicable Charger	Applicable Torque Meter	Bit Type
		Hard Joint	Soft Joint		HI	LO						
MYBT-NR0205F	18V	2~5	2~4	$\pm 5\%$	1200	-	1.25	400	SKC-LB1830C	MYCS-ID80-D	KTM-150	B9.5
MYBT-NR2507	18V	2.5~7	2.5~5.6	$\pm 5\%$	850	550	1.25	400	SKC-LB1830C	MYCS-ID80-D	KTM-150	B9.5
MYBT-NR0612	18V	6~12	6~9.6	$\pm 5\%$	550	350	1.5	415	SKC-LB1830C	MYCS-ID80-D	KTM-150	B9.5 W 3/8"
MYBT-NR0815	18V	8~15	8~12	$\pm 5\%$	350	220	1.85	440	SKC-LB1830C	MYCS-ID80-D	KTM-250	B9.5 W 3/8"
MYBT-NR0308F	18V	3~8	3~6.4	$\pm 5\%$	1200	-	1.9	461	SKC-LB1830C	MYCS-ID80-D	KTM-150	B9.5 W 3/8"
MYBT-NR0515F	18V	8~15	8~12	$\pm 5\%$	850	-	1.9	461	SKC-LB1830C	MYCS-ID80-D	KTM-250	B9.5 W 3/8"
MYBT-NR1230	18V	12~30	12~24	$\pm 5\%$	350	220	1.9	461	SKC-LB1830C	MYCS-ID80-D	KTM-1000	W 3/8"
MYBT-NR1545	18V	15~45	15~36	$\pm 5\%$	200	130	2.85	530	SKC-LB1840	MYCS-ID120 MYCS-ID80 MYCS-80	KTM-1000	W 1/2"
MYBT-NR2560	18V	25~60	25~48	$\pm 5\%$	200	130	2.85	530	SKC-LB1840	MYCS-ID120 MYCS-ID80 MYCS-80	KTM-1000	W 1/2"

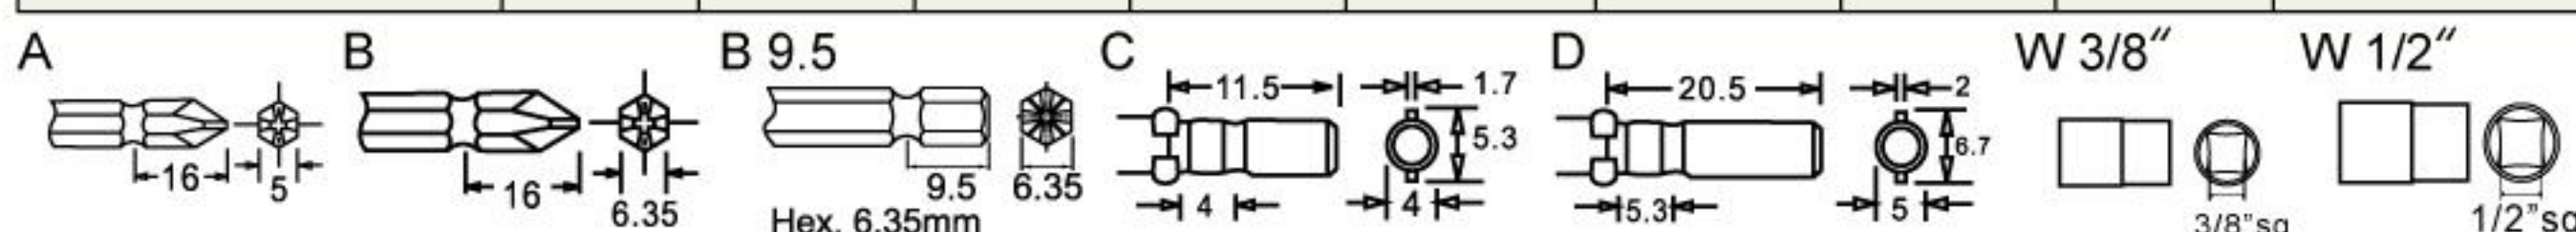

※Free load speed will be fixed when battery volume is more than 17V (17~21V)

※Tool Weight & Size indications without battery.