



MY-CURRENT Controller



External Dimension

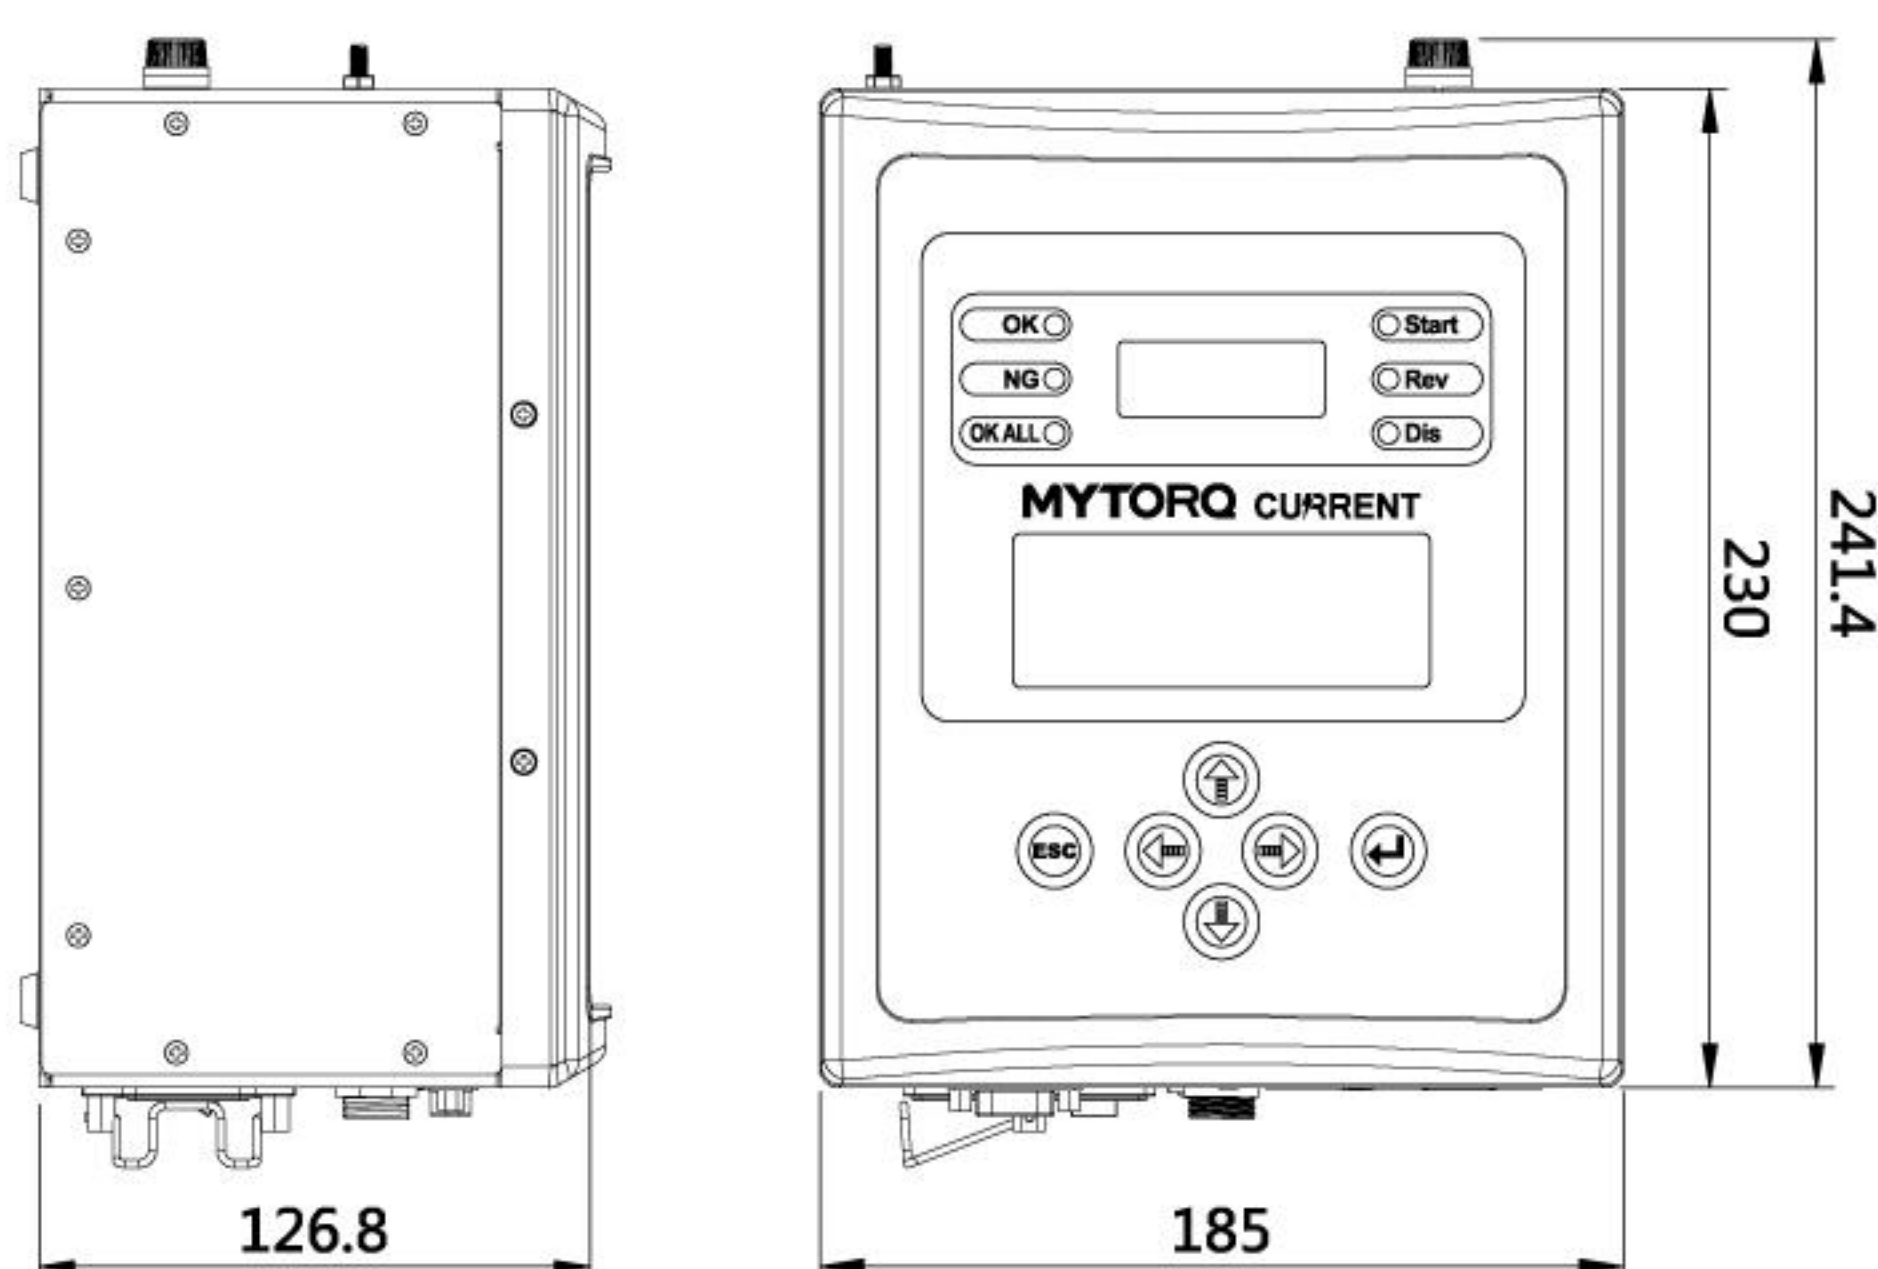

MYTORQ current control tightening system offers high torque accuracy and repeatability. It allows users to fully control and monitor the entire screw rundown process. Many costly tightening errors such as floating screw, stripped screw, over torquing...etc. can be eliminated. Users can adjust current level to achieve tightening goals with consistent tightening results. Parameters are saved in controller and can be adjusted to optimize tightening process for all kinds of joints. It's compact light weight design makes it easy for long time operation.

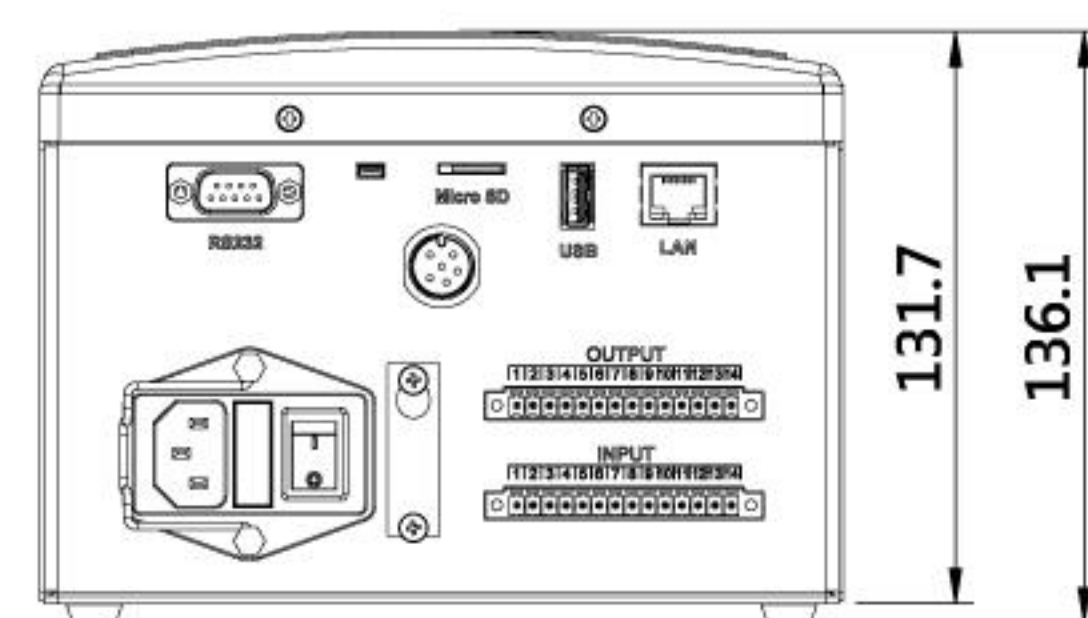

Unit: mm

Specifications

Model	MY-CURRENT
Input Voltage	AC 115V / 230V
Input Frequency	50 - 60Hz
Input Current	6.3A
Output Voltage	DC 40V
Output Current	Max 9A
power consumption	360W
External dimensions	241 x 185 x 127(mm)
Weight	3.46Kg
Applicable Model	MY-CURRENT Series