




External Dimension

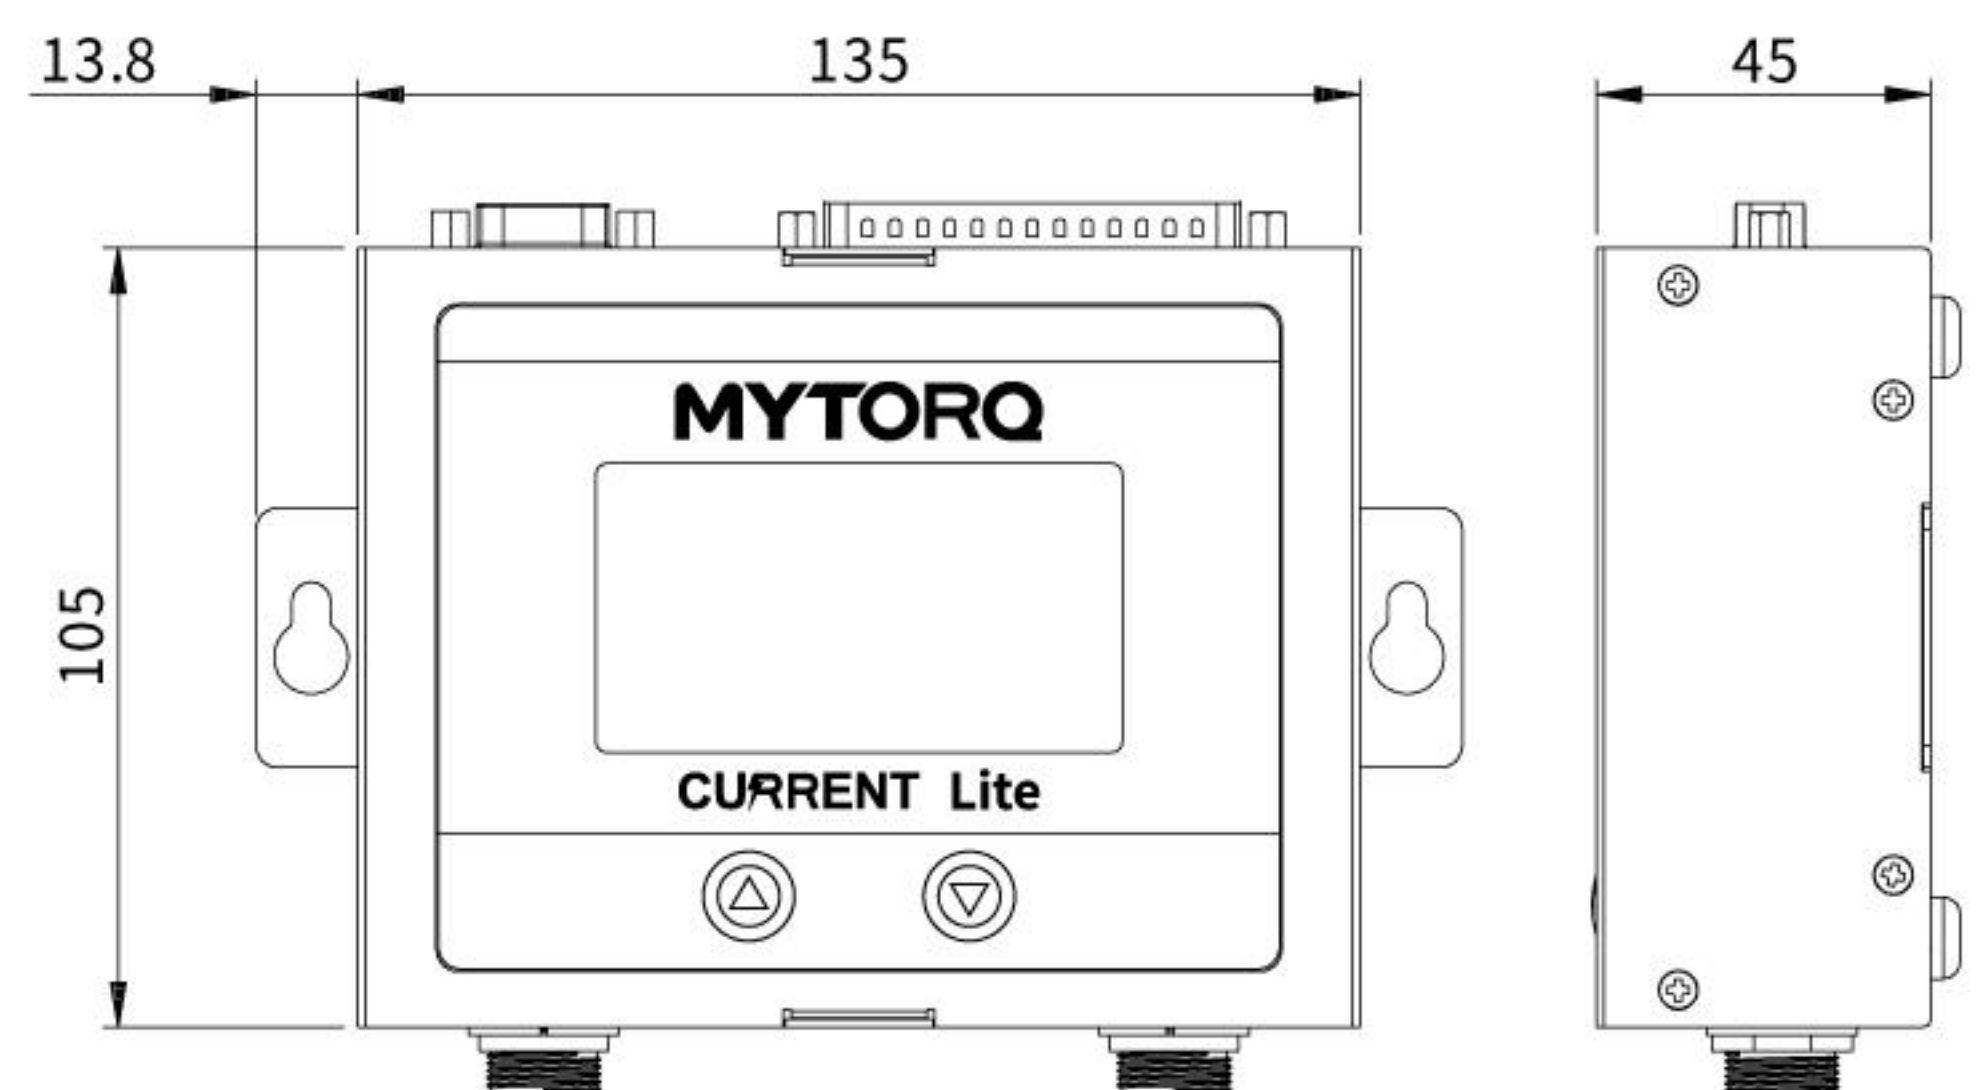

Unit: mm

Features

MYTORQ current control tightening system offers high torque accuracy and repeatability. It allows users to fully control and monitor the entire screw rundown process. Many costly tightening errors such as floating screw, stripped screw, over torquing...etc. can be eliminated. Users can adjust current level to achieve tightening goals with consistent tightening results. Parameters are saved in controller and can be adjusted to optimize tightening process for all kinds of joints. It's compact light weight design makes it easy for long time operation.

Specifications

Model	MY-CURRENT Lite
Input Voltage	DC 40V
Output Voltage	DC 40V
External connection input	Start / Reverse / Disable / Confirm
External connection output	Start / Reverse / OK / NG
External dimensions	135 x 105 x 45 (mm)
Weight	620g