

### MY-SAVER Screwdriver Series



(Optional)




MY-SAVER  
1 / 2.4F / 3 mini

MY-SAVER  
1 / 2.4F / 3 mini  
+ KS-TM

M 32\*P1.0  
LH (Reverse Thread)



A

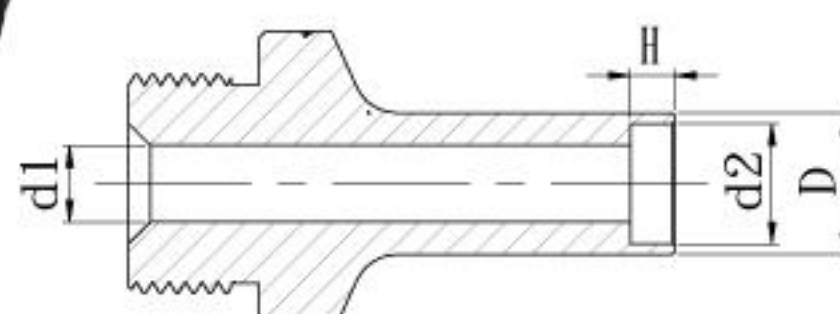

#### Bit nozzle specification



| PART NO   | d1  | d2  | D   | H |
|-----------|-----|-----|-----|---|
| P11032-15 | 3.5 | 5.5 | 6.5 | 2 |
| P11032-17 | 4.5 | 6.5 | 7.5 | 2 |
| P11032-18 | 5.5 | 7.5 | 8.5 | 2 |

※d1<Screw Head Dia<d2



Screw Head Dia





### External Dimension

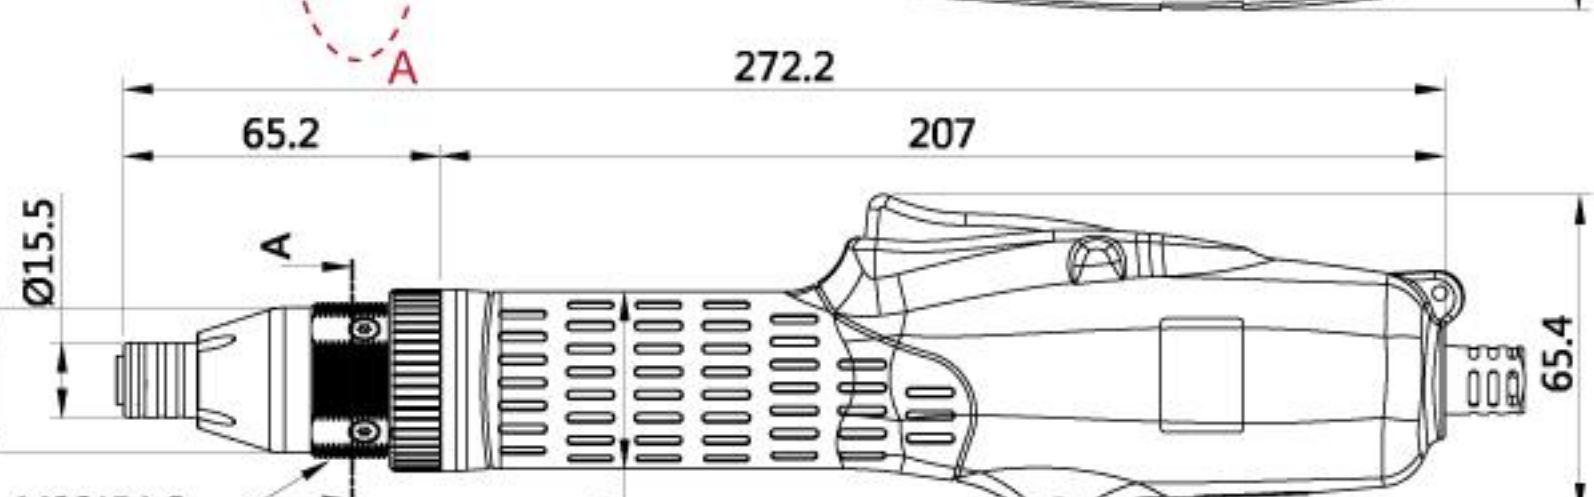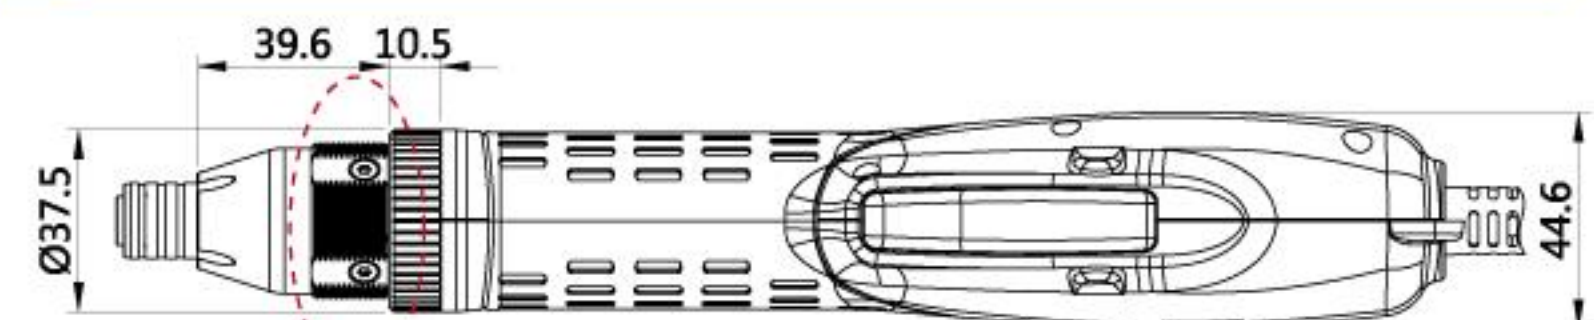

MY-SAVER 1 mini

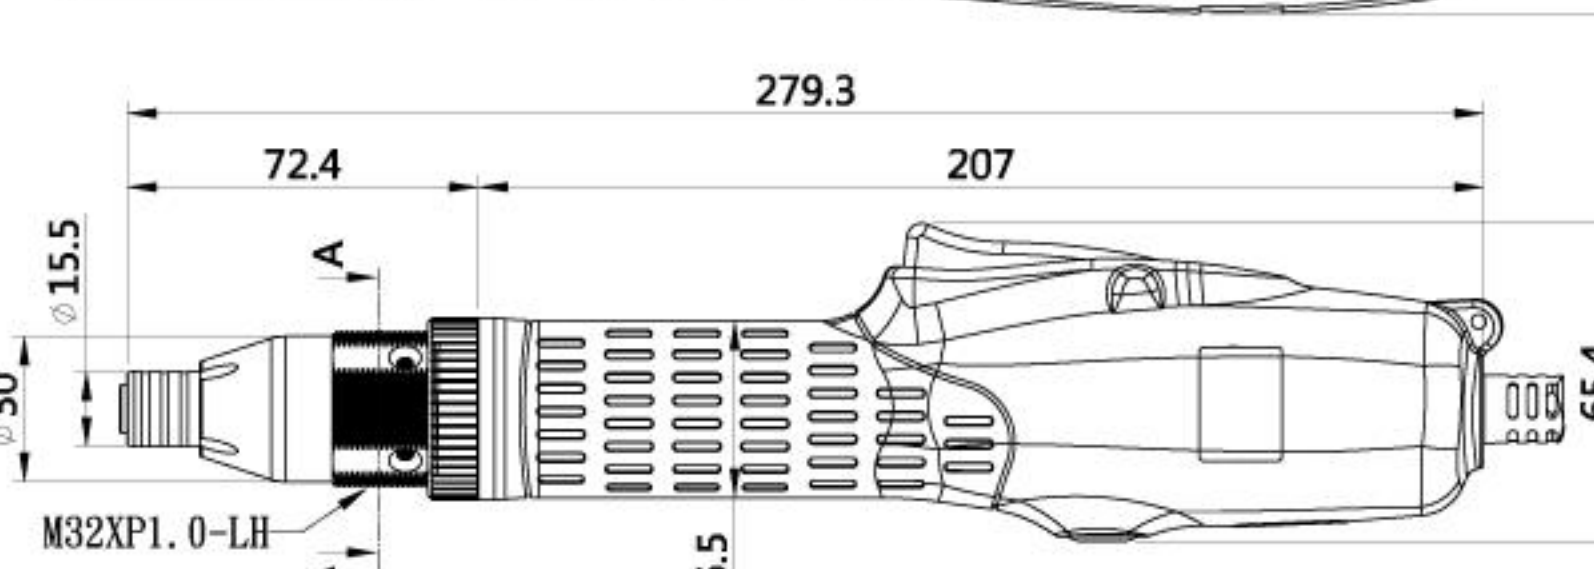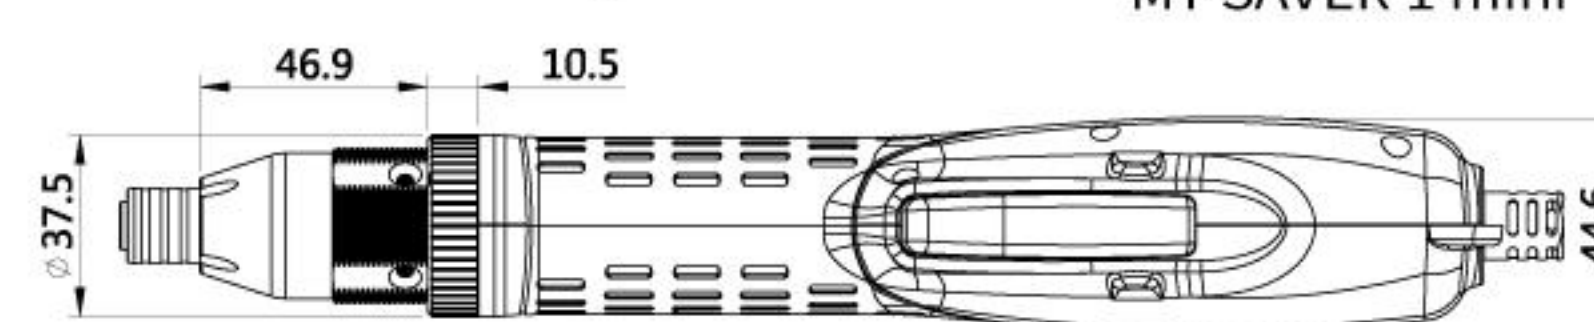

MY-SAVER 2.4F / 3 mini

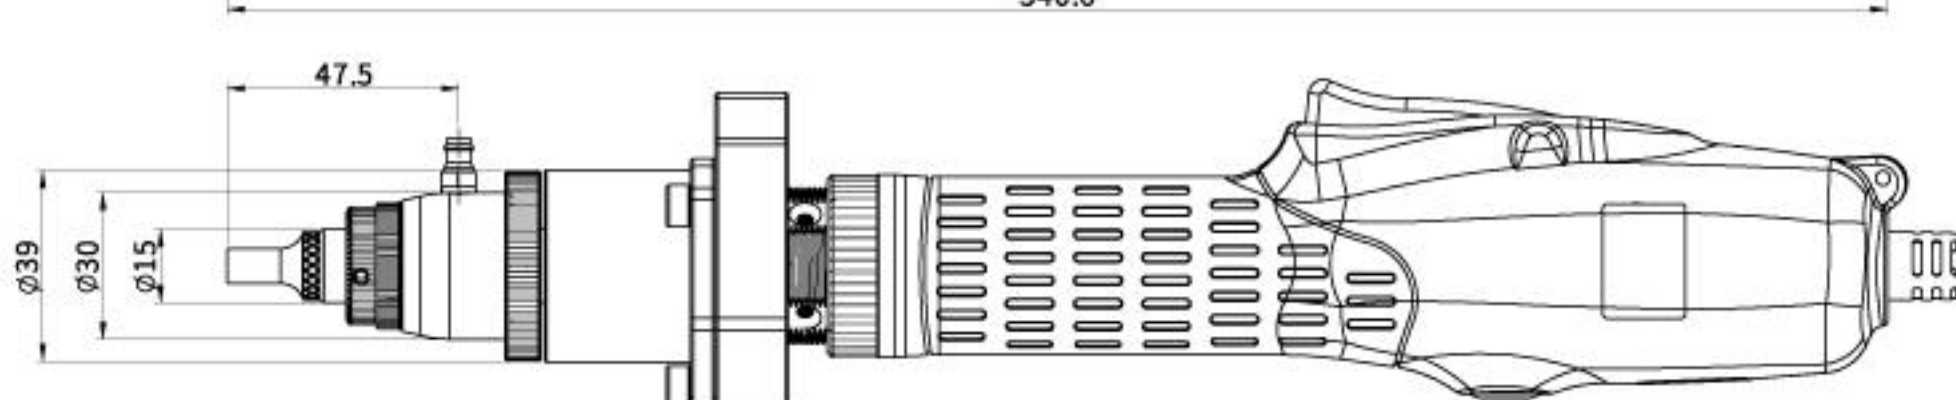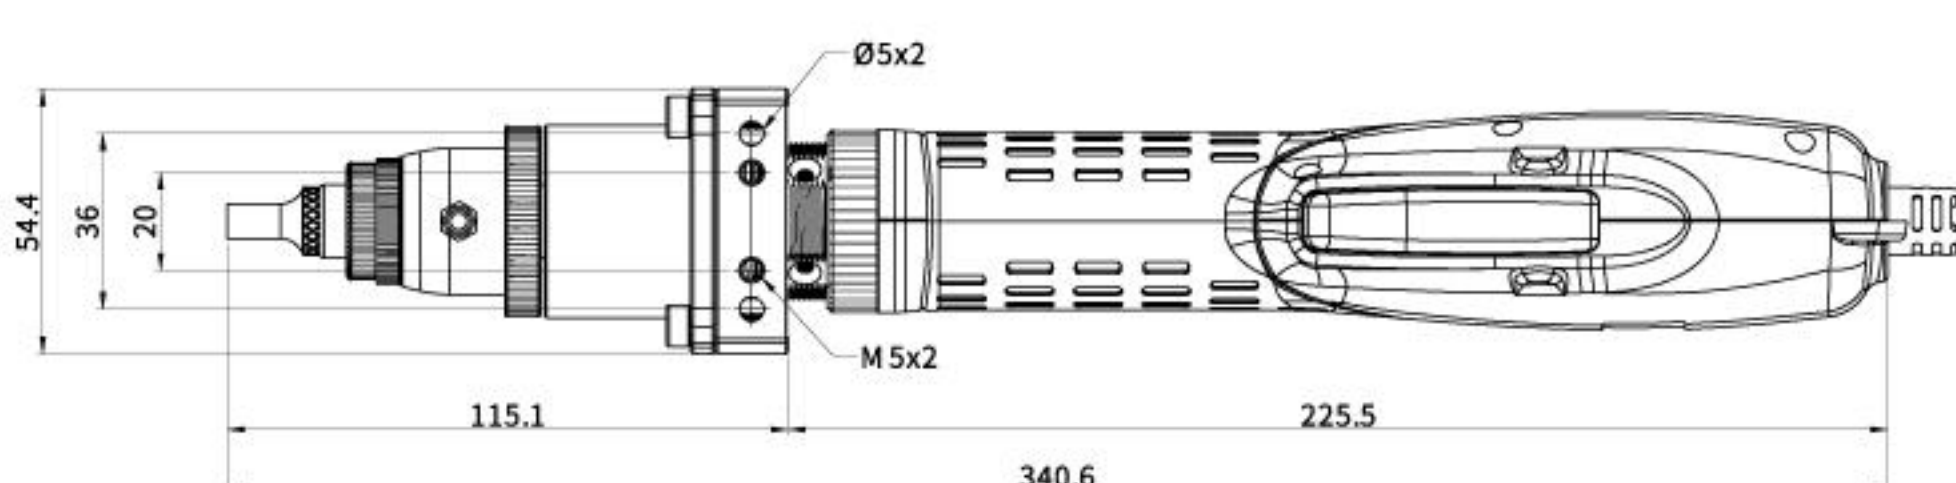

MY-SAVER 1 / 2.4F / 3 mini + KS-TM

Unit: mm

### Features







- Made in Germany high precision torque transducer. < 1% tolerance
- Adopted brushless motor for clean, quiet, and accurate operation
- Durable mechanical design screwdriver is able to perform tightening for over 2 million times
- Wide torque range is applicable for various high tech workpieces
- Ergonomic designed to comfort user for long time operation
- 3 options LED illumination
- 4 optional start types

### Specifications

| Model              | Input voltage | Torque  |            |            | Free Speed (r.p.m) | Power Consumption | Weight (g) | Length (mm) | Power Controller | Bit Type  |
|--------------------|---------------|---------|------------|------------|--------------------|-------------------|------------|-------------|------------------|-----------|
|                    |               | (N.m)   | (kgf.cm)   | (Lbf.in)   |                    |                   |            |             |                  |           |
| MY-SAVER 1 mini    | DC40          | 0.1~1   | 1.02~10.2  | 0.88~8.85  | 980~100            | 90W               | 680        | 280         | MY-SAVER         | B 9.5、C、D |
| MY-SAVER 2.4F mini | DC40          | 0.4~2.4 | 4.08~24.48 | 3.54~21.24 | 2000~140           | 90W               | 680        | 280         | MY-SAVER         | B 9.5、D   |
| MY-SAVER 3 mini    | DC40          | 0.5~3   | 5.1~30.60  | 4.43~26.55 | 980~100            | 90W               | 680        | 280         | MY-SAVER         | B 9.5、D   |

※CE、RoHS

(MY-SAVER 2.4F mini NO CE)

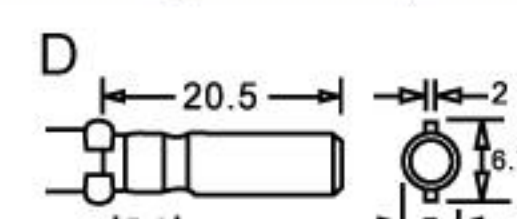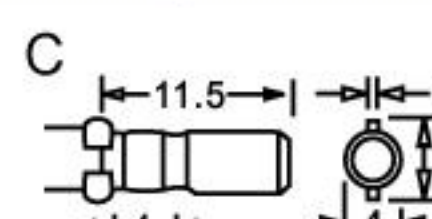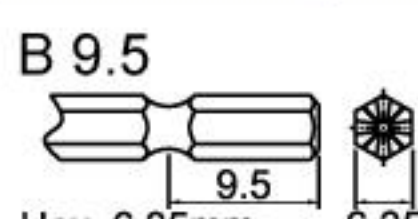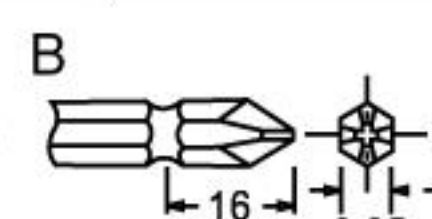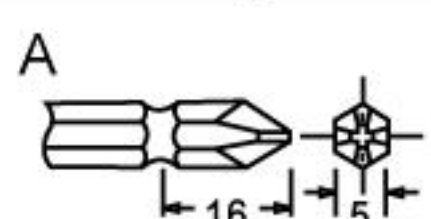

### Accessories



Screwdriver Holder  
KH-2



Screwdriver Holder  
KH-2L