

MY-Sirius Screwdriver Series



(Optional)

M 32 * P1.0
LH (Reverse Thread)




A

MY-Sirius 1 / 2F / 3 mini

MY-Sirius 1 / 2F / 3 mini + KS-TM

External Dimension

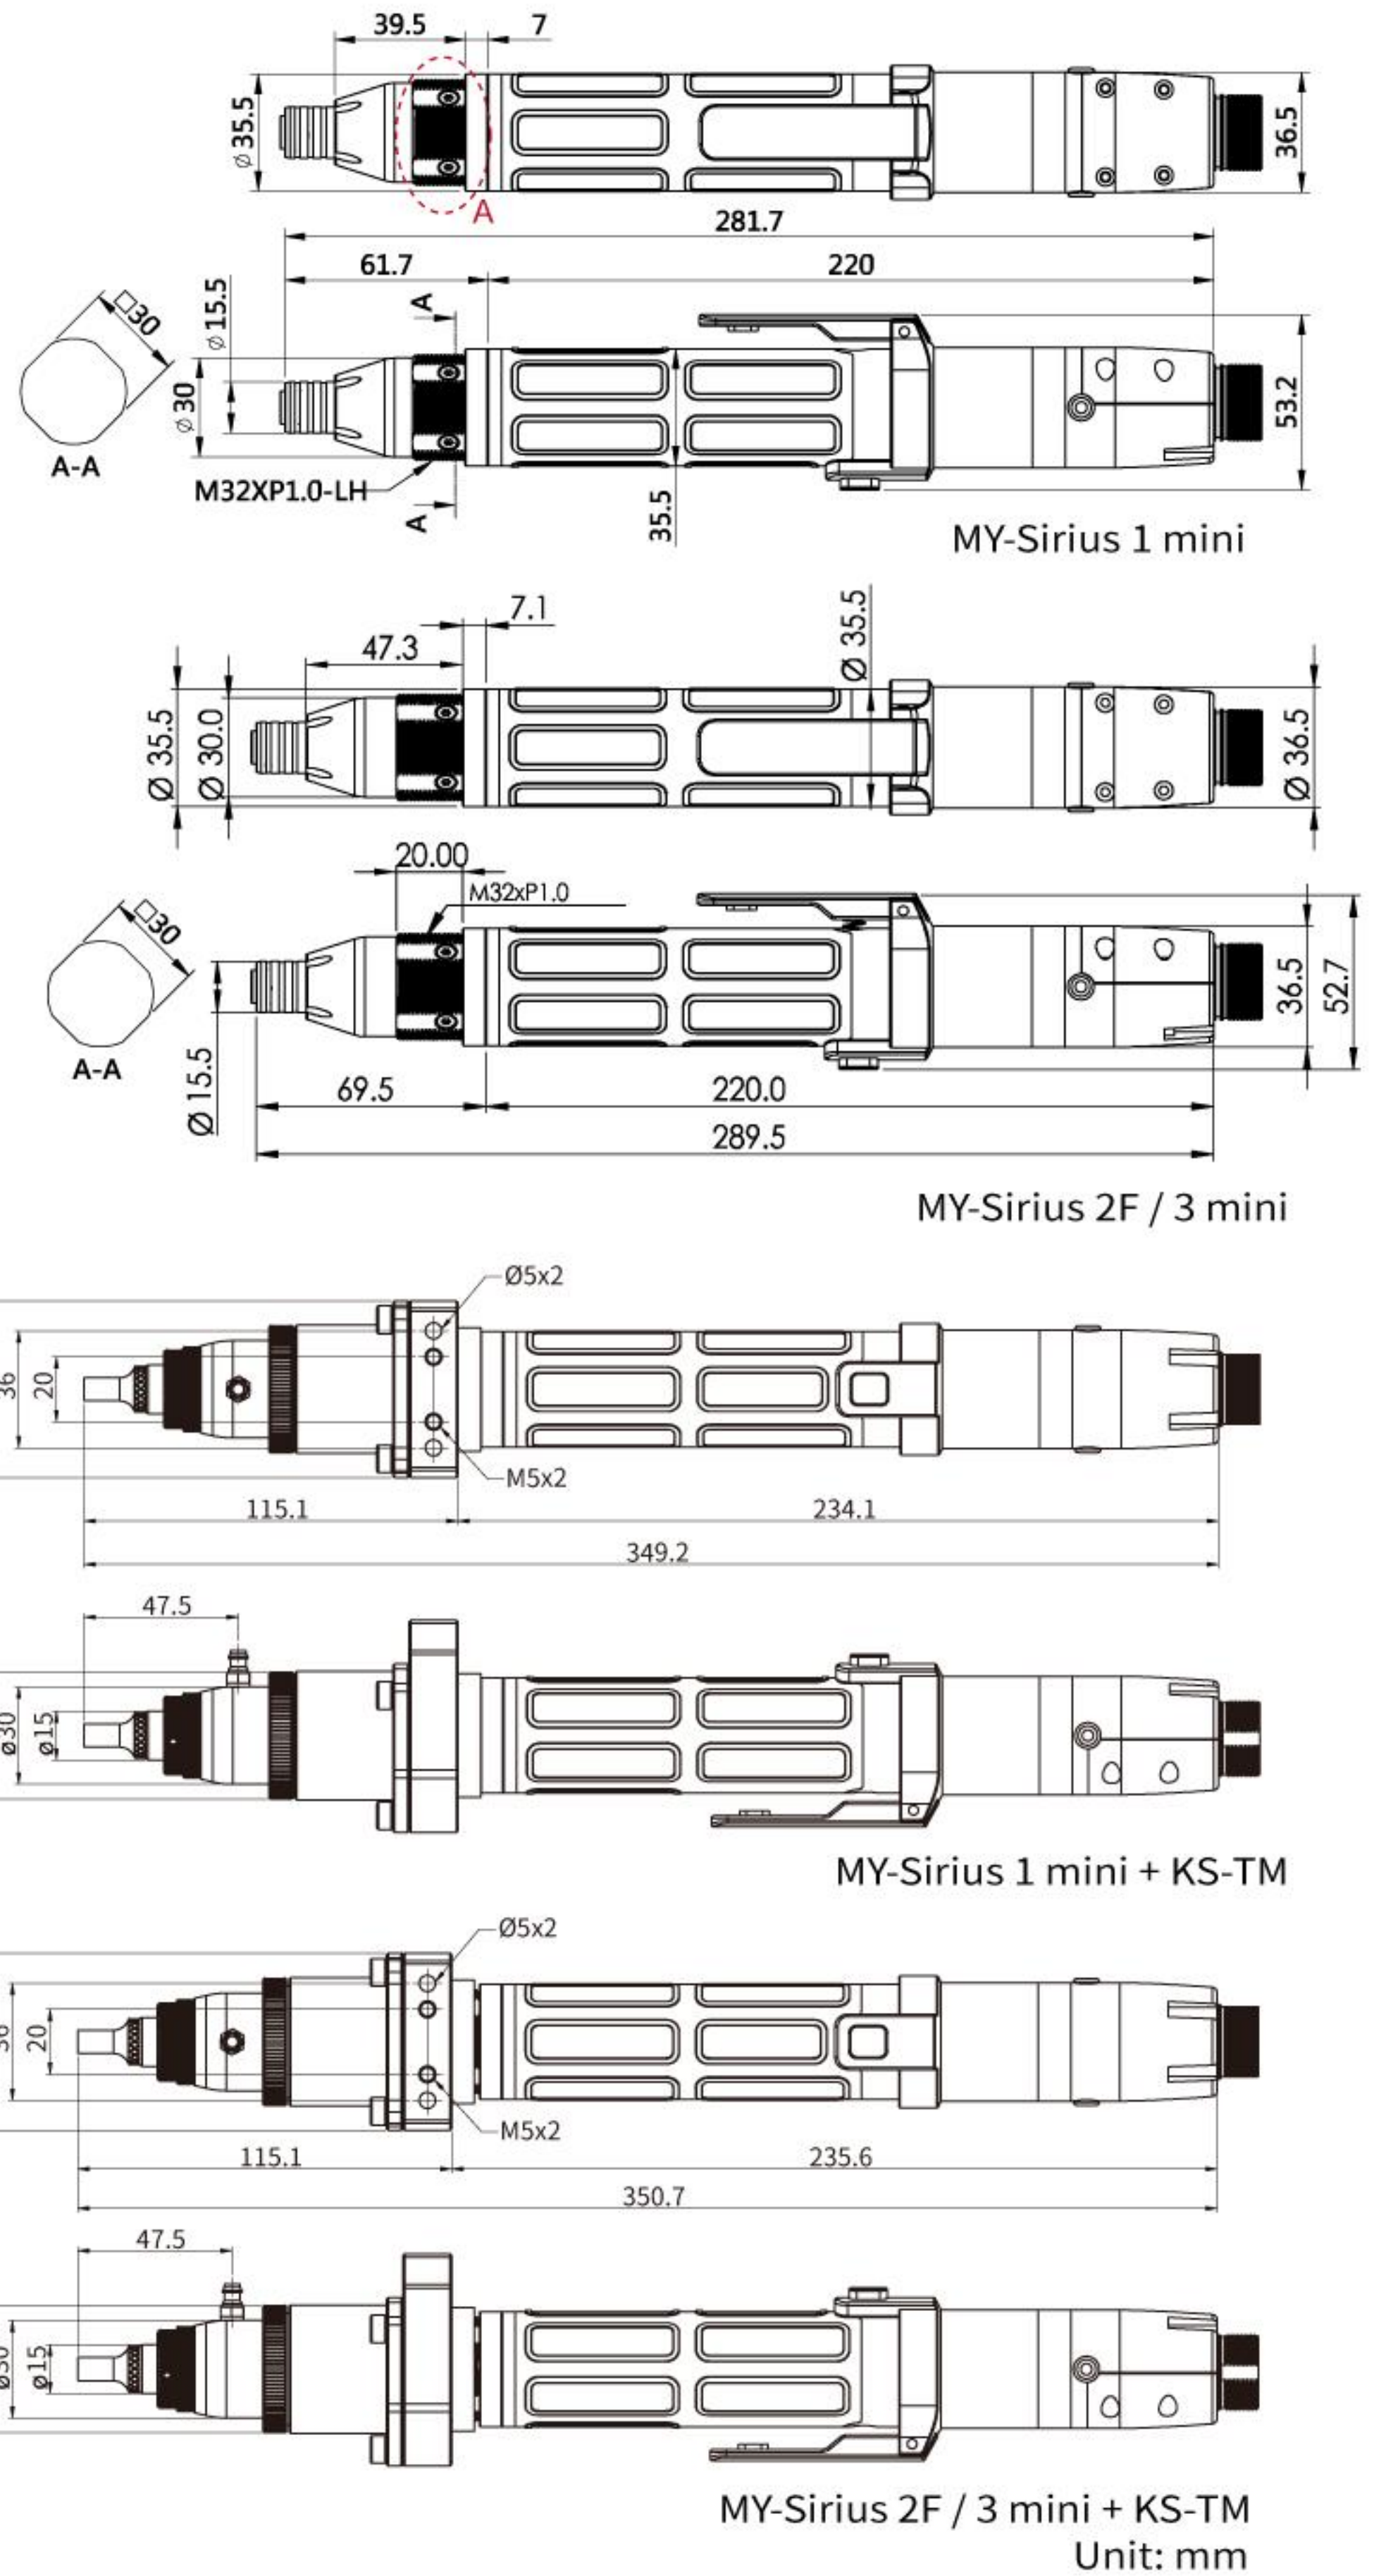


Bit nozzle specification

PART NO	d1	d2	D	H
P11032-15	3.5	5.5	6.5	2
P11032-17	4.5	6.5	7.5	2
P11032-18	5.5	7.5	8.5	2

※d1<Screw Head Dia<d2

Screw Head Dia

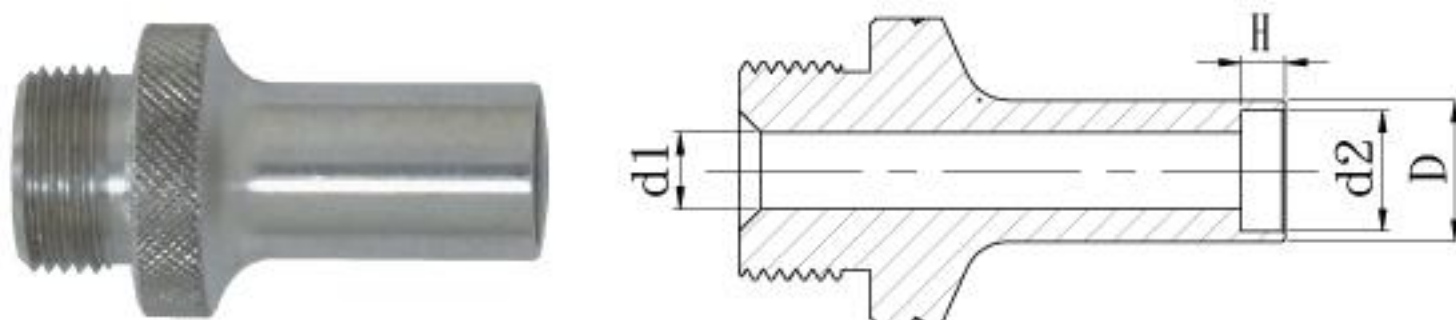

Specifications

Model	Input voltage	Torque			Free Speed (r.p.m)	Power Consumption	Weight (g)	Length (mm)	Applicable controller	Bit Type
		(N.m)	(kgf.cm)	(Lbf.in)						
MY-Sirius 1 mini	DC40	0.1 ~ 1	1.02 ~ 10.2	0.88 ~ 8.85	980~60	90W	644	282	MY-Sirius	B 9.5・C・D
MY-Sirius 2 F mini	DC40	0.3 ~ 2.4	3.06 ~ 24.48	2.66 ~ 21.24	2000~140	90W	692	291	MY-Sirius	B・B 9.5・D
MY-Sirius 3 mini	DC40	0.38 ~ 3	3.88 ~ 30.60	3.36 ~ 26.55	980~60	90W	718	291	MY-Sirius	B・B 9.5・D

※CE、RoHS

