

MY-Sirius Screwdriver Series





M 34 * P1.0
LH (Reverse Thread)



MY-Sirius 3 / 5 / 7

MY-Sirius 3 / 5 / 7 + KS-TM

External Dimension

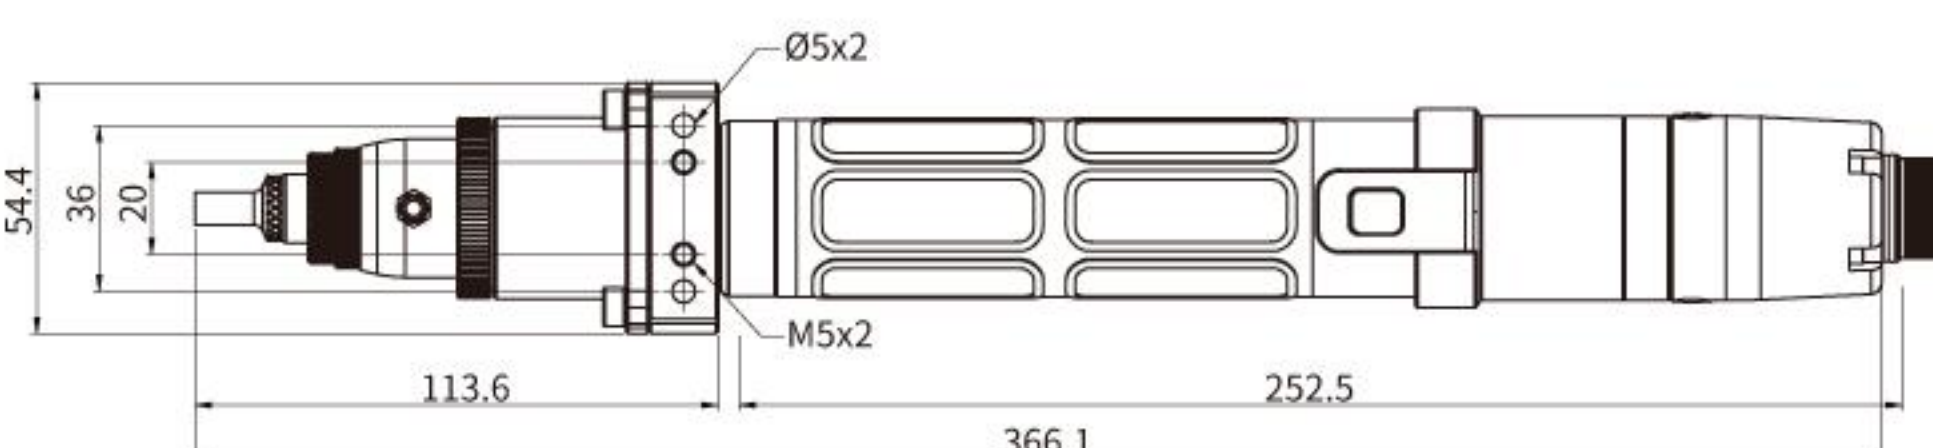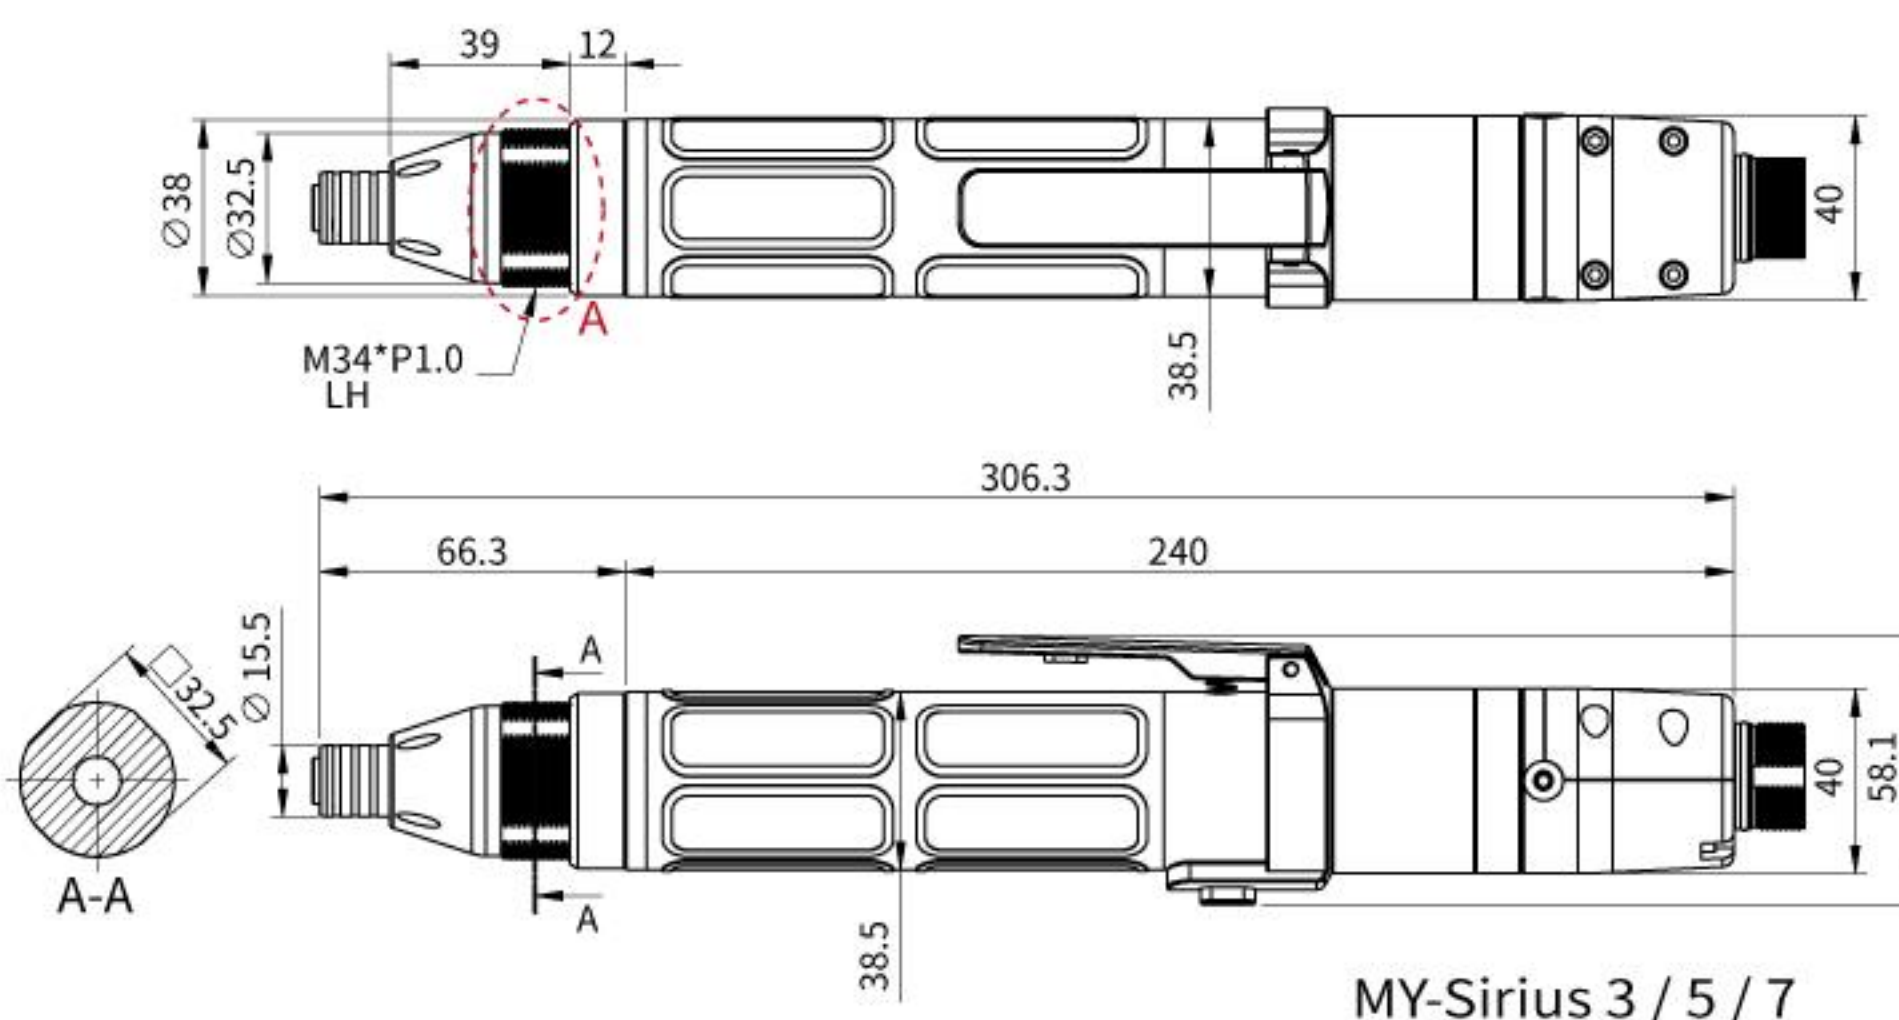



MY-Sirius 3 / 5 / 7 + KS-TM
Unit: mm

Bit nozzle specification

PART NO	d1	d2	D	H
P11032-15	3.5	5.5	6.5	2
P11032-17	4.5	6.5	7.5	2
P11032-18	5.5	7.5	8.5	2

※d1<Screw Head Dia<d2

Screw Head Dia

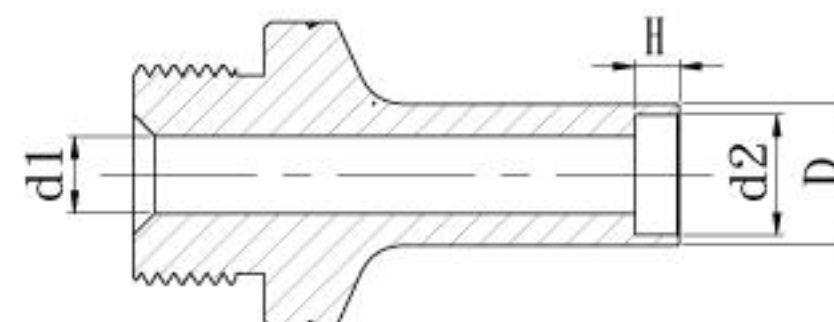

Specifications

Model	Input voltage	Torque			Free Speed (r.p.m)	Power Consumption	Weight (g)	Length (mm)	Applicable controller	Bit Type
		(N.m)	(kgf.cm)	(Lbf.in)						
MY-Sirius 3	DC40	0.38 ~ 3	3.88 ~ 30.60	3.36 ~ 26.55	1600~60	90W	900	307	MY-Sirius	A、B 9.5、D
MY-Sirius 5	DC40	0.63 ~ 5	6.43 ~ 51.00	5.58 ~ 44.26	1100~60	90W	900	307	MY-Sirius	A、B 9.5
MY-Sirius 7	DC40	0.88 ~ 7	8.98 ~ 71.40	7.79 ~ 61.96	660~60	90W	900	307	MY-Sirius	B 9.5

※CE、RoHS

