

KFA-0830 / KFA-0850A(H)



KFA-0850A
(VACUUM PICK UP TYPE)



KFA-0850H
(MANUAL PICK UP TYPE)




KFA-0830

Features

- **APPLICABILITY OF SPECIAL SCREW TYPES :**
Applicable Thread length to thread diameter ratio = 1:1 or 1<1.
Screw head minimum thickness 0.2mm
- **BRUSHLESS MOTOR :**
Adopted durable maintenance free made in Japan brushless motor.
- **CHANGEABLE RAILWAY :**
High precision wire cut changeable railway. Changeable rail, screw size from 0.8mm up to 5.0mm.
- **HORIZONTAL LINEAR FEEDING :**
Horizontal linear feeding, adopting durable aluminum extruded rail. Screws are carried on a horizontal track for smooth feeding.
- **COUNTER :**
Material shortage alert and screw taking counting function in digital display.
- **SIGNAL OUTPUT FUNCTION :**

KFA-0830 Applicable screw size

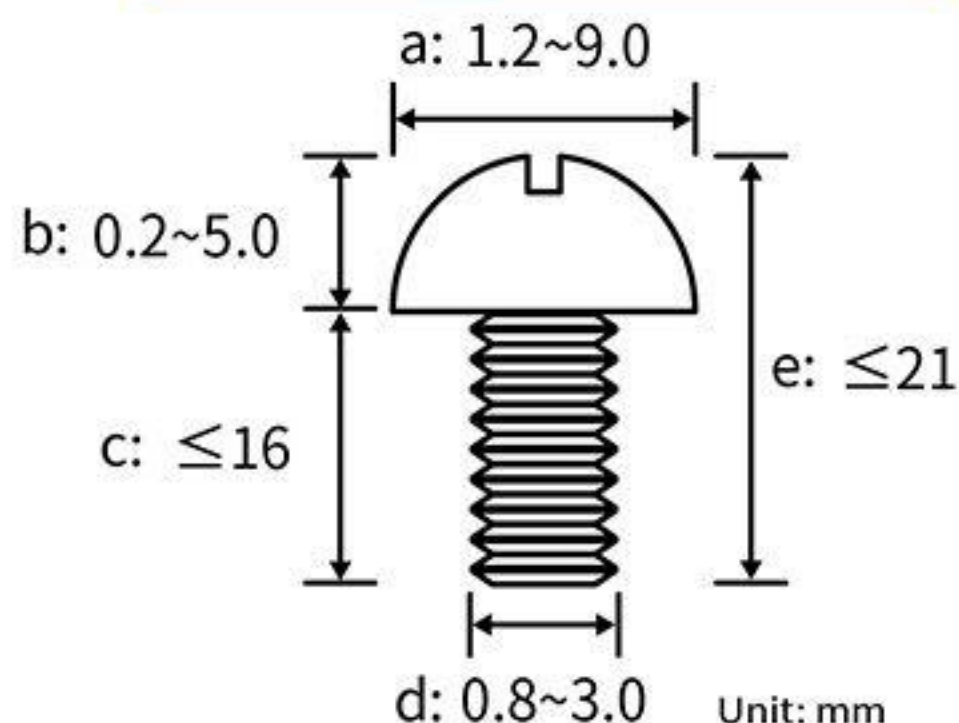

Specifications

Model Name & Number	KFA-0830	KFA-0850A(H)
Size	182(L)X124(W)X146(H) mm	182(L)X124(W)X150(H) mm
Weight	3.0kg (w/o adapter)	3.1kg (w/o adapter)
Power Source	AC 100~240V	
Switching Adapter	DC 12V Switching Adapter	
Delivery Speed	46~50 pcs/min (1.2~1.3 Sec)	42~90 pcs/min (0.7~1.5 Sec)
Feeding	Chamber Blanking	
Scooping Chamber Capacity	200~220 c.c	

KFA-0850A(H) Applicable screw size

