


BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER AND PUSH START CLUTCH TYPE SERIES

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.


MYR Series

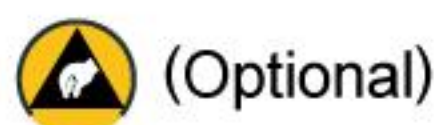

(Optional)




External Dimension

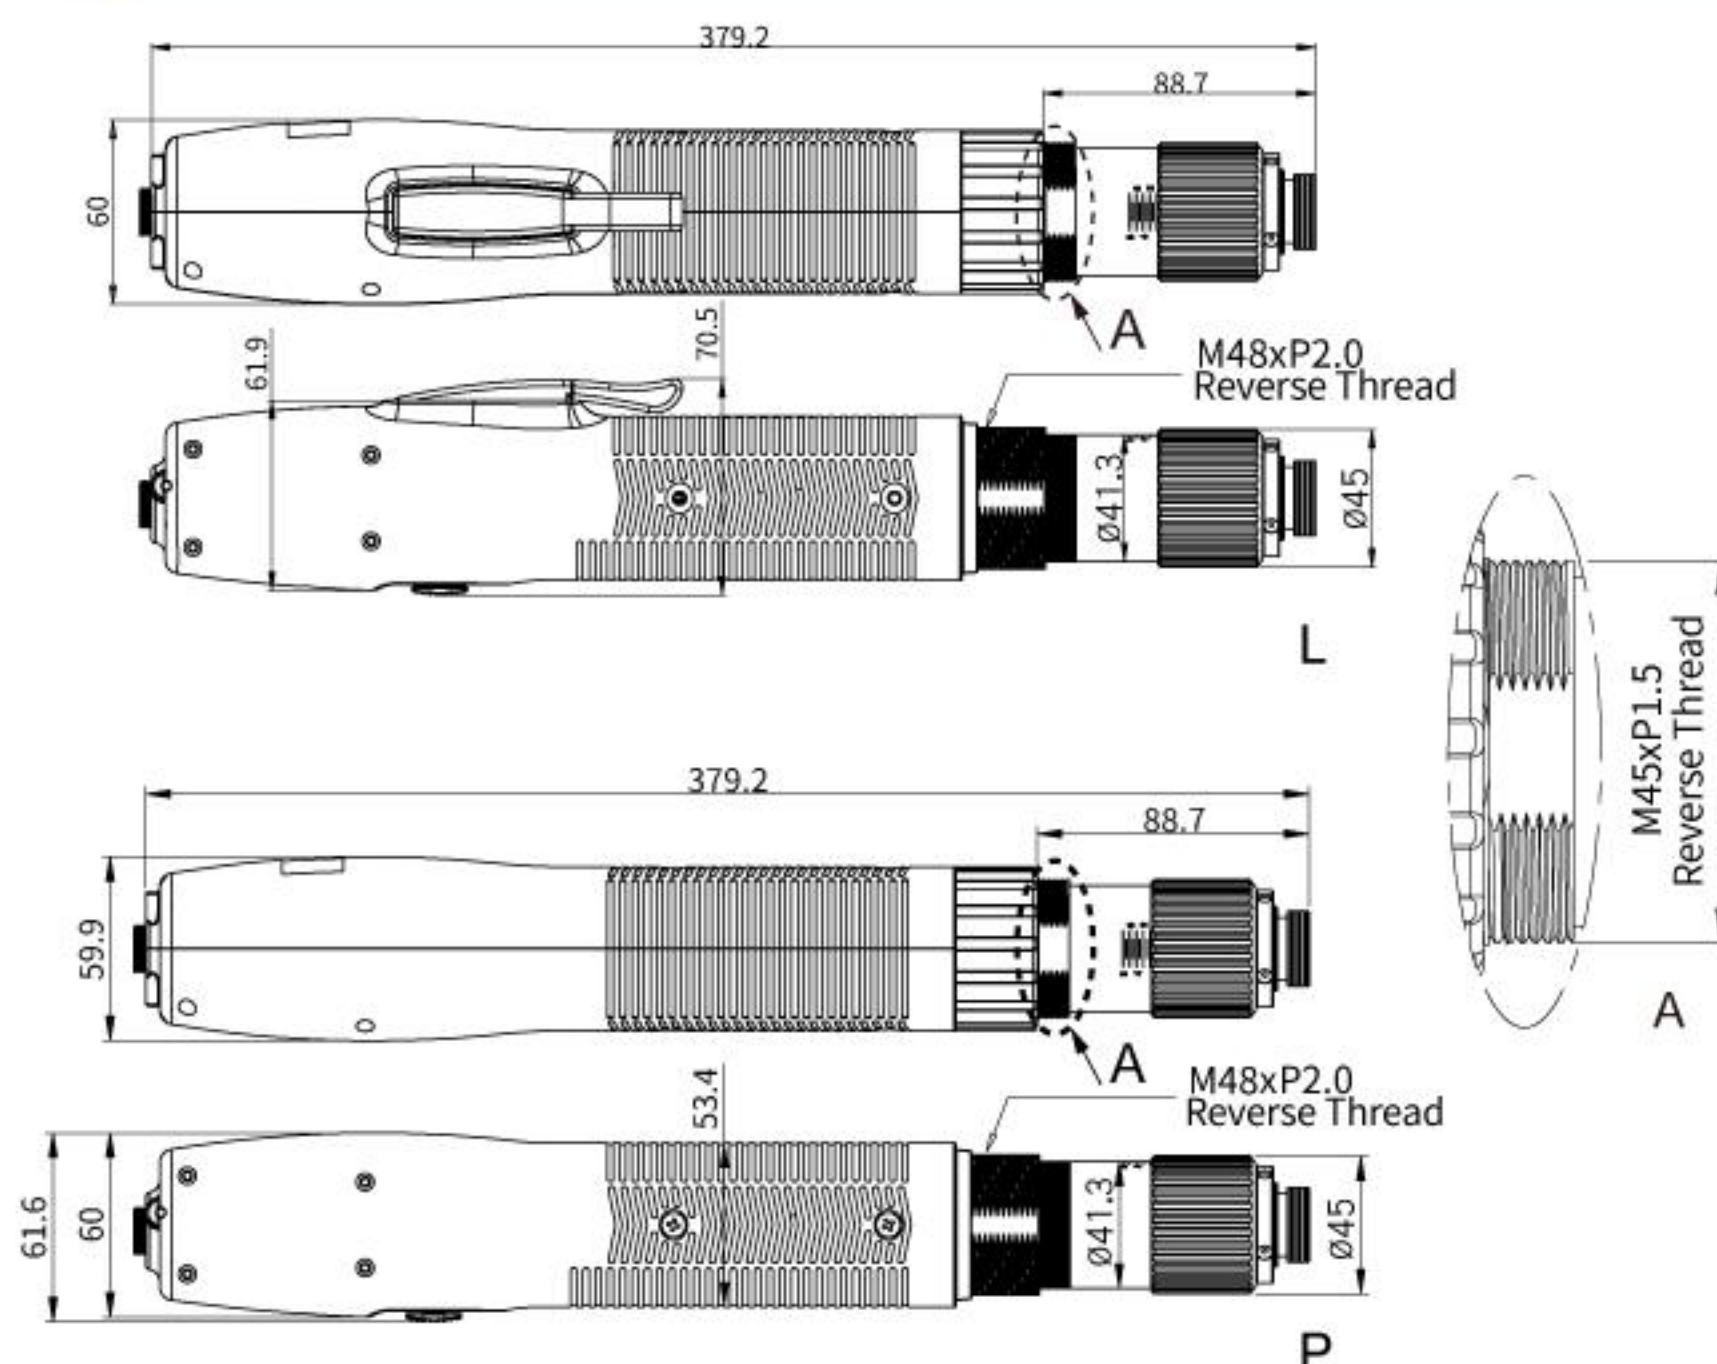

Unit: mm

Torque Range Reference Chart

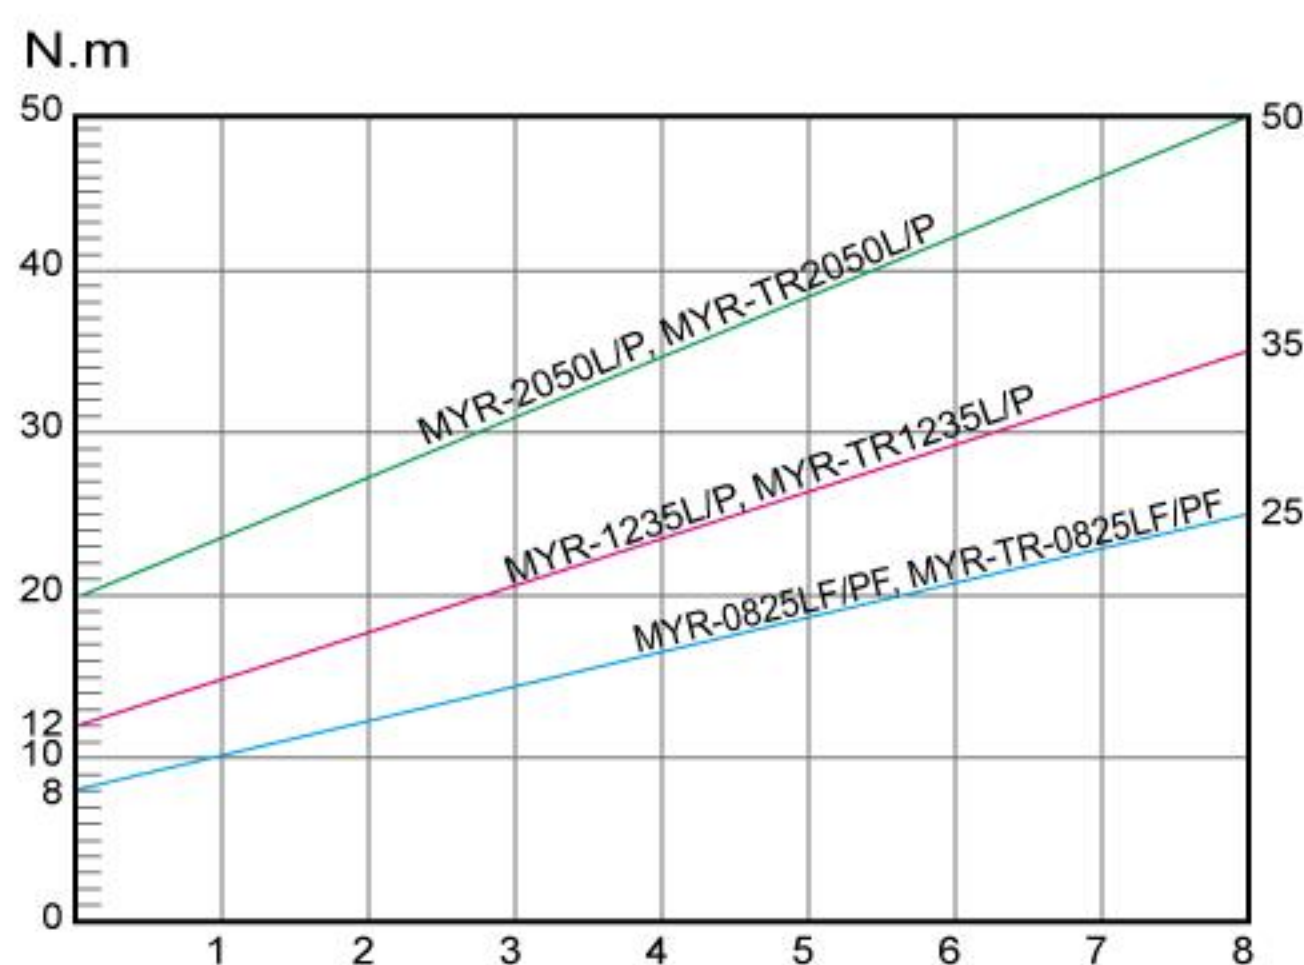

Accessories



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (kg)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MYR-0825LF MYR-0825PF	8~25	8~20	±5%	550	-	≤10	≤8	2.2	380	MYP40-1500	B 9.5 · W 3/8"
MYR-1235L MYR-1235P	12~35	12~28	±5%	350	-	≤12	≤10	2.2	380	MYP40-1500	B 9.5 · W 3/8" · W 1/2"
MYR-2050L MYR-2050P	20~50	20~40	±5%	230	-	≤14	≤12	2.2	380	MYP40-1500	W 1/2"

※CE、RoHS

