

SURFACE CONDITIONING BELTS



Low stretch


Specifically designed to work in a belt form and to prevent elongation during the work.
The special design ensures exceptional durability.

X-Flex


This material is unique in the market.
Its particular structure makes it very flexible and prevents delamination.
Ideal to work in narrow belts form and it's easy to fit on very compact machinery.

Heavy Duty for Belts


Low stretch construction combined with high aggressiveness and extreme heavy duty applications.

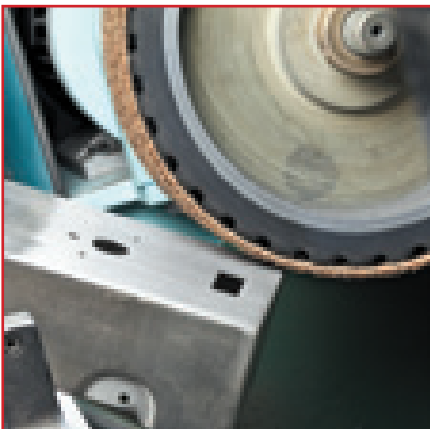


SCLS - Low Stretch




COARSE
Front: Brown
Back: Brown
Grit type:
Aluminium Oxide




MEDIUM
Front: Red
Back: Red
Grit type:
Aluminium Oxide



FINE
Front: Green
Back: Green
Grit type:
Aluminium Oxide




VERY FINE
Front: Blue
Back: Blue
Grit type:
Aluminium Oxide




ULTRA FINE
Front: Grey
Back: Grey
Grit type:
Silicon Carbide


SCXF – X-Flex




COARSE
Front: Brown
Back: Green
Grit type:
Aluminium Oxide



MEDIUM
Front: Red
Back: Green
Grit type:
Aluminium Oxide





FINE
Front: Green
Back: Green
Grit type:
Aluminium Oxide




VERY FINE
Front: Blue
Back: Green
Grit type:
Aluminium Oxide

SCHD – Heavy Duty

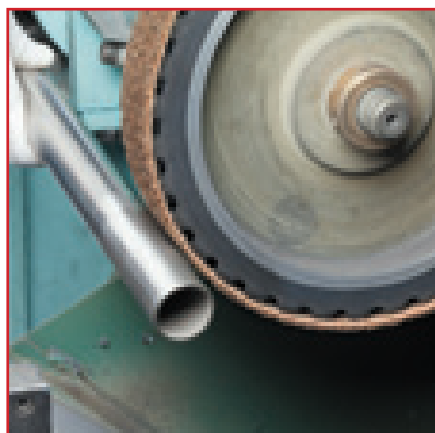

COARSE
Front: Brown
Back: Blue
Grit type: Ceramic
Aluminium Oxide



MEDIUM
Front: Red
Back: Blue
Grit type: Ceramic
Aluminium Oxide





SCLS

surface conditioning belts LOW STRETCH

SCLS belts for industrial sanders

Dimensions		A/O Coarse Brown	A/O Medium Red	A/O Fine Green	A/O Very Fine Blue	S/C Ultra Fine Grey
100x1000	5	SCB400	SCB401	SCB633	SCB402	SCB413
120x1500	5	SCB403 •	SCB404 •	SCB634	SCB405 •	SCB414 •
150x1750	5	SCB406	SCB407	SCB635	SCB408	SCB415
75x2000	5	SCB409 •	SCB410 •	SCB636	SCB411 •	SCB412 •
150x2000	5	SCB518	SCB519	SCB637	SCB520	SCB521

SCLS custom-made belts PRICE (running meter)

Minimum width: 6mm - Minimum length of belts: 275mm
For lower width same price as width 15 mm

width	min. order q.ty	A/O Coarse Brown	A/O Medium Red	A/O Fine Green	A/O Very Fine Blue	S/C Ultra Fine Grey	Joint
15	16						
20	12						
25	12						
30	8						
35	8						
40	6						
50	6						
55	5						
60	4						
70	4						
75	4						
80	3						
100	3						
120	2						
150	2						
200	1						
250	1						
300	1						



SCXF

surface conditioning belts X-FLEX

SCXF for portable machine tools

width x length		A/O Coarse Brown	A/O Medium Red	A/O Fine Green	A/O Very Fine Blue	Tool Manufacturer
6x305	20	SCB315	SCB316	SCB643	SCB317	DYNABRADE
6x457	20	SCB218	SCB219	SCB640	SCB220	DYNABRADE
6x610	20	SCB306	SCB307	SCB638	SCB308	DYNABRADE, LOESER
9x533	20	SCB506	SCB507 •	SCB647	SCB508 •	FLEX
12x520	20	SCB500 •	SCB501 •	SCB645	SCB502 •	SUHNER, PFERD
13x305	20	SCB318	SCB319	SCB644	SCB320	DYNABRADE
13x457	20	SCB221	SCB222 •	SCB641	SCB223 •	DYNABRADE
13x533	20	SCB324 •	SCB325 •	SCB648	SCB326 •	SUHNER, PFERD, FLEX, SECO
13x610	20	SCB309 •	SCB310 •	SCB639	SCB311 •	DYNABRADE, LOESER
19x457	20	SCB312	SCB313 •	SCB642	SCB314 •	DYNABRADE
19x520	20	SCB503 •	SCB504 •	SCB646	SCB505 •	SUHNER, PFERD
20x815	20	SCB515	SCB516	SCB651	SCB517	FEIN, FLEX
30x533	20	SCB509 •	SCB510 •	SCB649	SCB511 •	SUHNER, PFERD, FLEX, SECO
40x618	20	SCB512 •	SCB513 •	SCB650	SCB514 •	SUHNER, PFERD

SCXF custom-made belts PRICE (running meter)

Minimum width: 6mm - Minimum length of belts: 275mm
For lower width same price as width 15 mm

width	min. order q.ty	A/O Coarse Brown	A/O Medium Red	A/O Fine Green	A/O Very Fine Blue	Joint
15	16					
20	12					
25	12					
30	8					
35	8					
40	6					
50	6					
55	5					
60	4					
70	4					
75	4					
80	3					
100	3					
120	2					
150	2					
200	1					



SCHD

custom-made surface conditioning belts
HEAVY DUTY

PRICE (running meter)

width	min. order q.ty	A/O Coarse Brown	A/O Medium Red	Joint
15	16			
20	12			
25	12			
30	8			
35	8			
40	6			
50	6			
55	5			
60	4			
70	4			
75	4			
80	3			
100	3			
120	2			
150	2			
200	1			
250	1			
300	1			